


Lwin
TILES

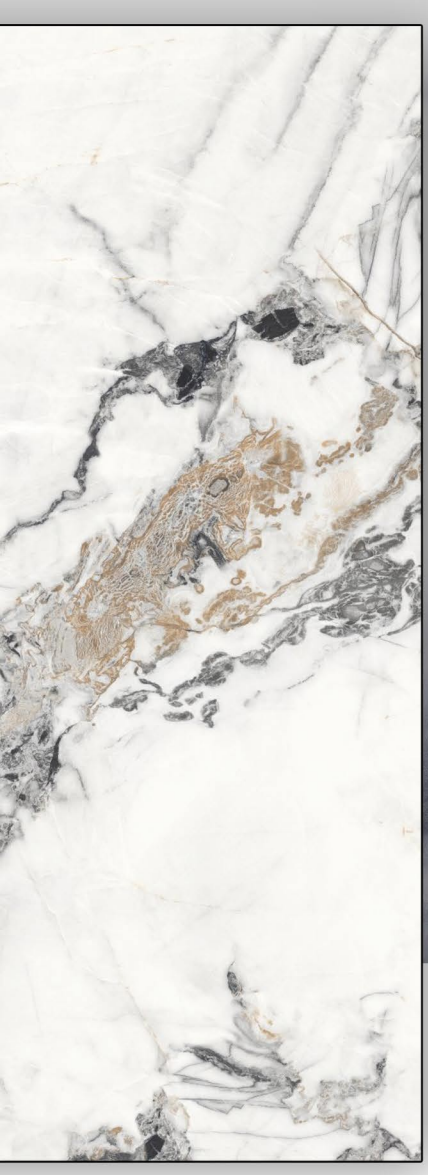

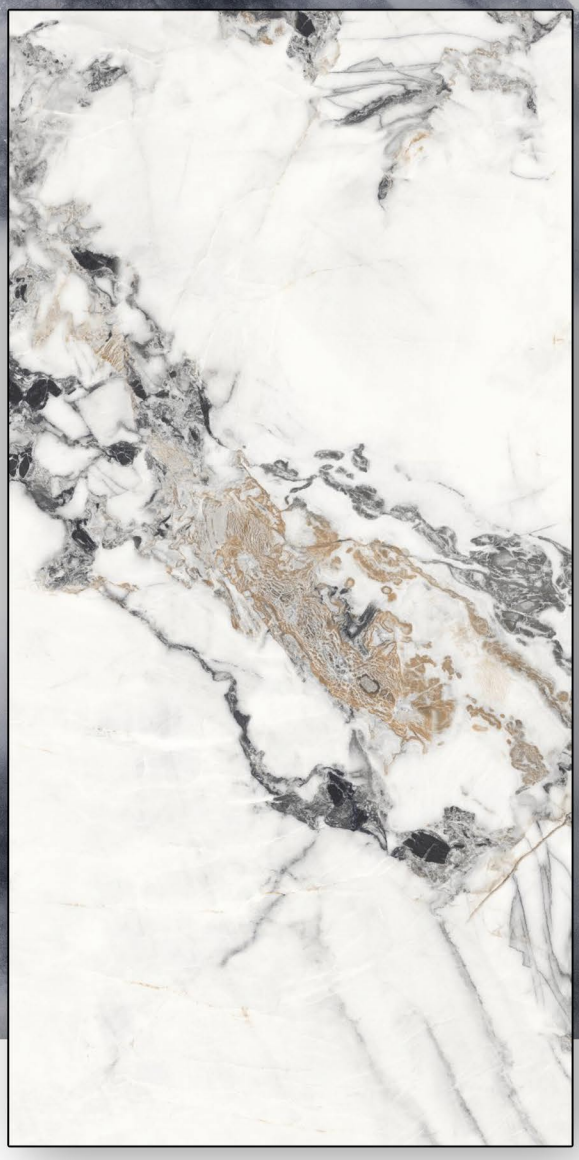


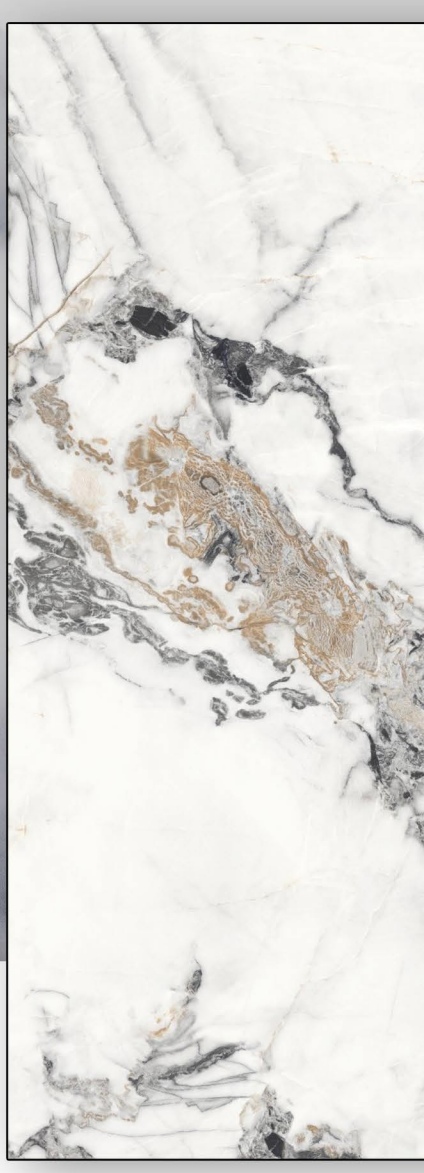

Glossy

Series

Available
Sizes

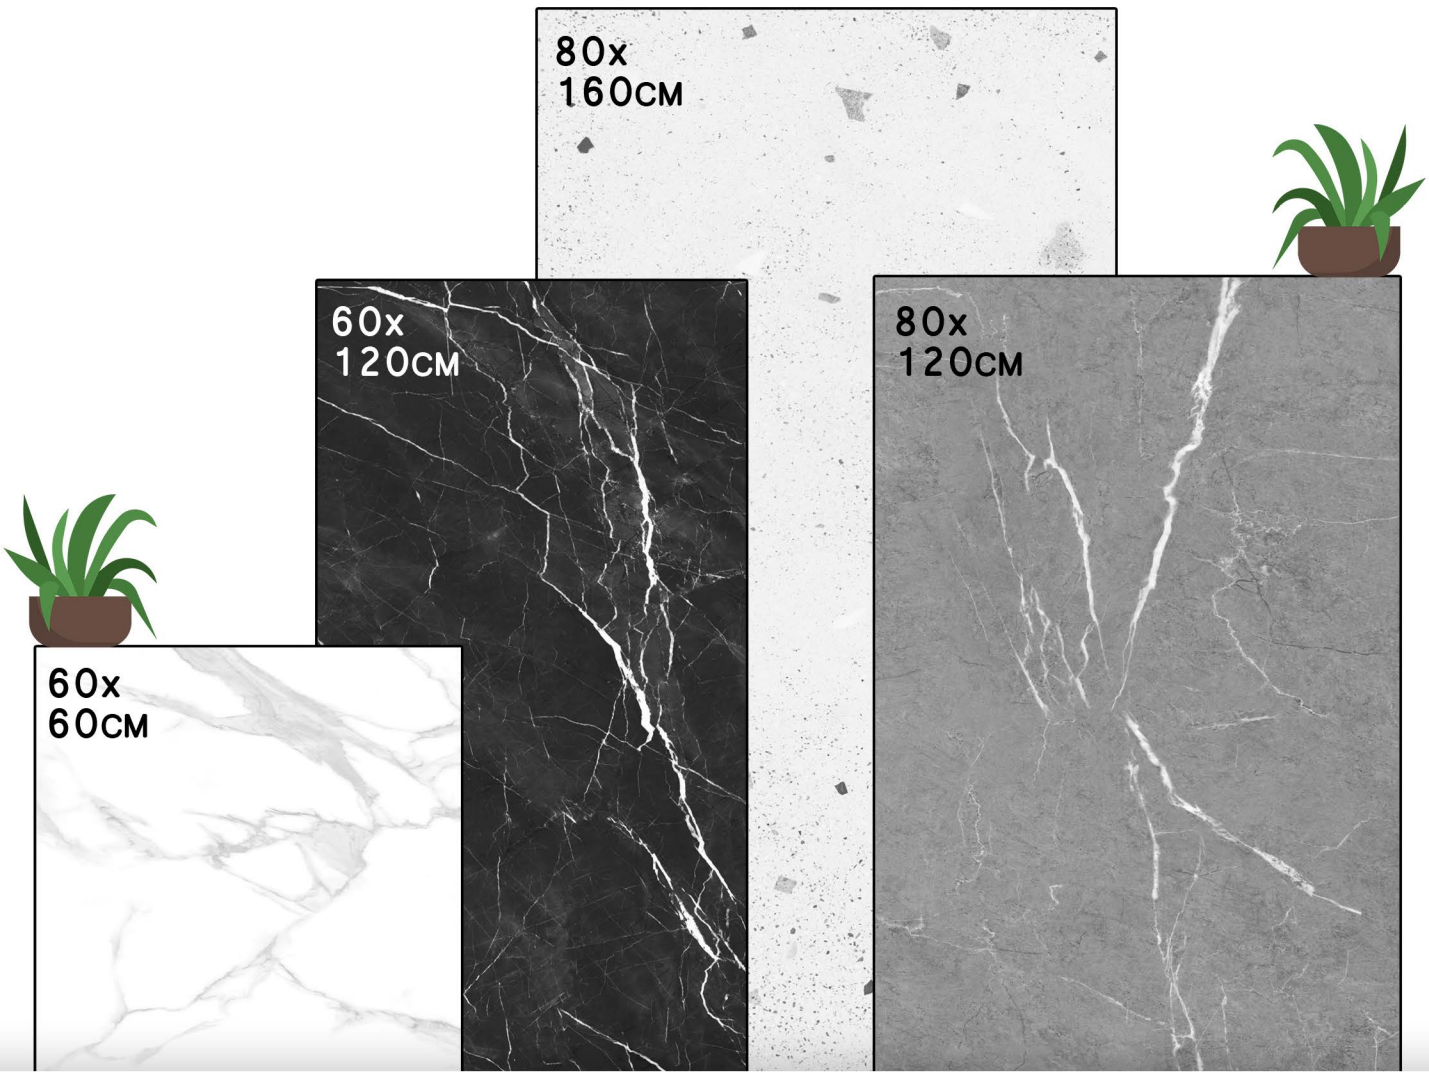

Dimensional
Stability

Acid
Resistance

Stain
Resistance

High
Durable


Home
Applicable

Factory
Applicable

Supermart
Applicable

Hotel
Applicable

About
Us

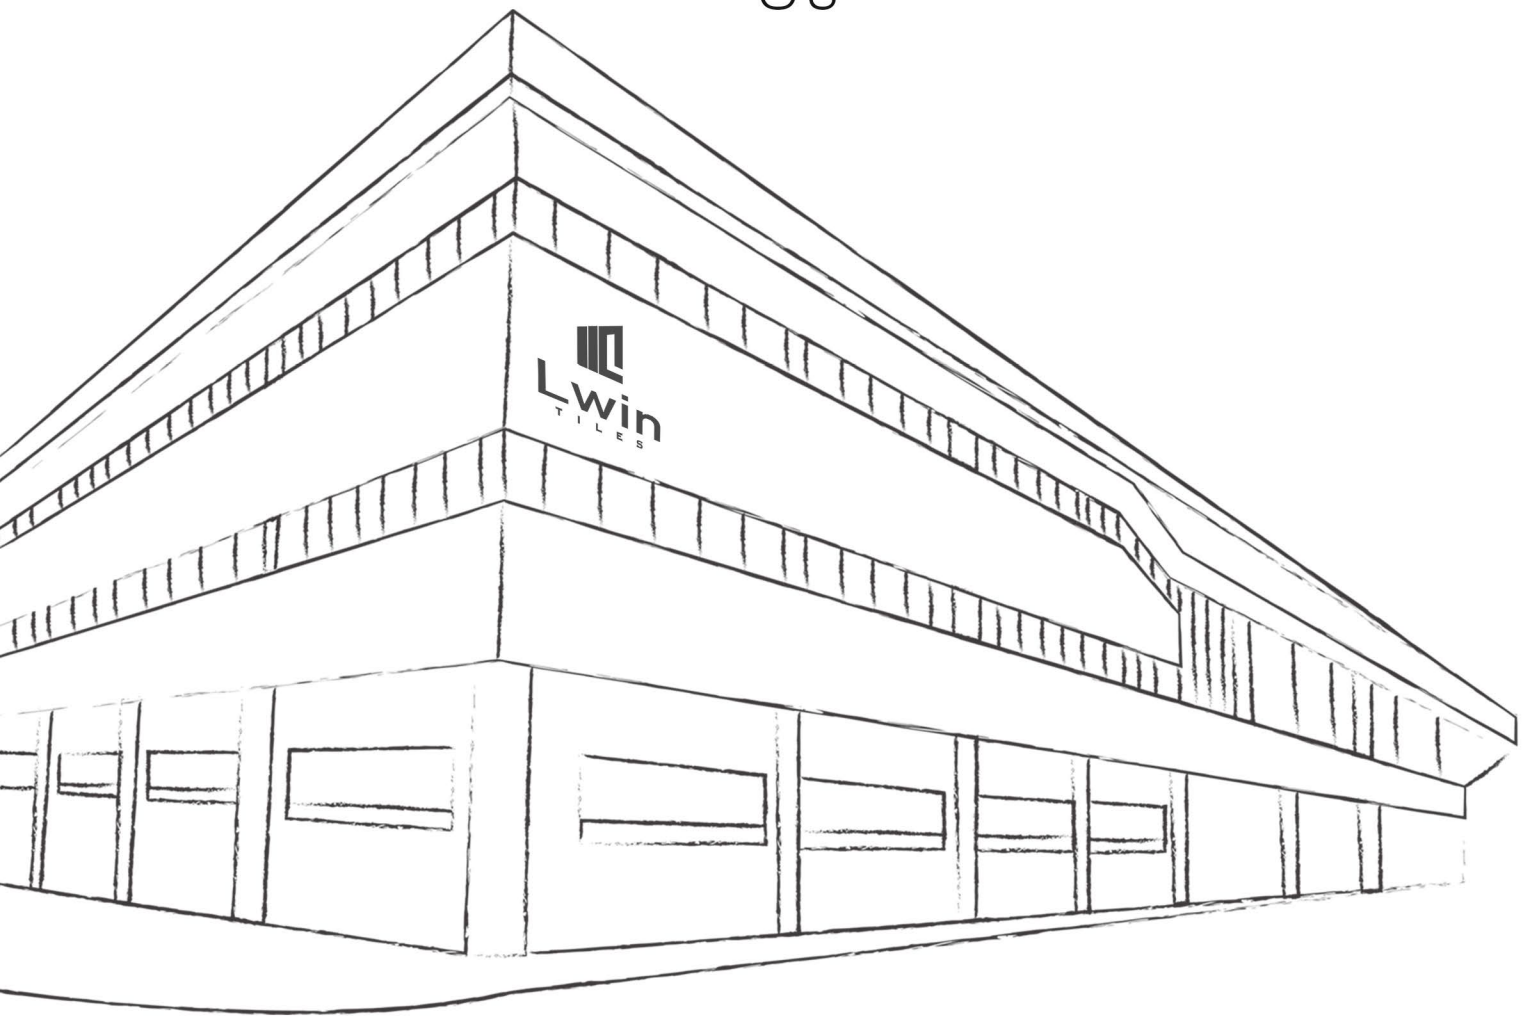

Our **Units** are well equipped with the best technology that allowing us to produce high-quality tiles with a cosistently impeccable finish.

Our excellent **Team** closely moniter every phase of the process. They put greatest effort to deliver on our commitments so that we can creat value for our customers.

Our different and wide range of **Design** collections which consist of technical properties.

Lwin
TILES









3741

Lwin
TILES









3742

Lwin
TILES









3743

Lwin
TILES









3744

Lwin
TILES










3745

Lwin
TILES








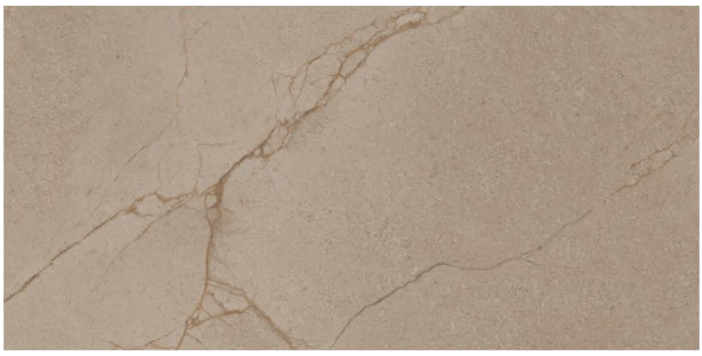



3746

Lwin
TILES



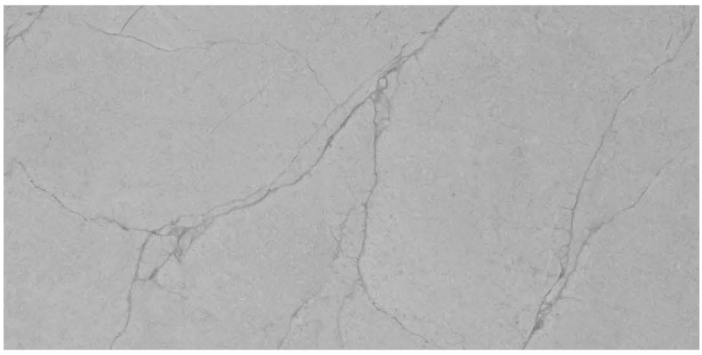

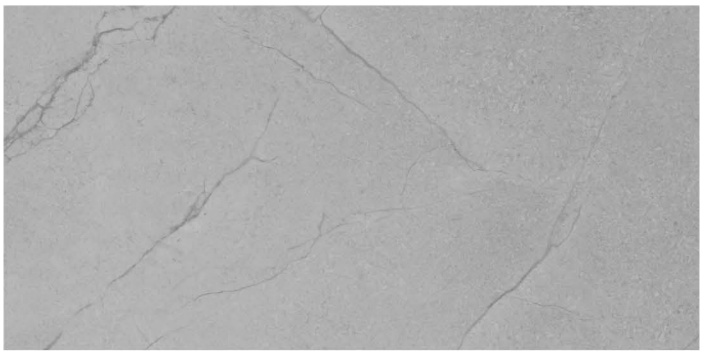

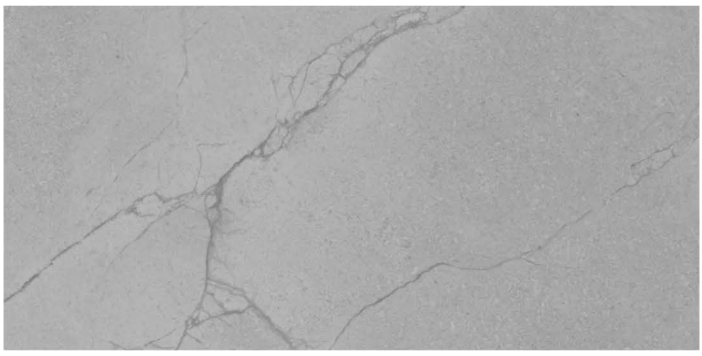

3747

Lwin
TILES









3748

Lwin
TILES









3749

Lwin
TILES










3750

Lwin
TILES



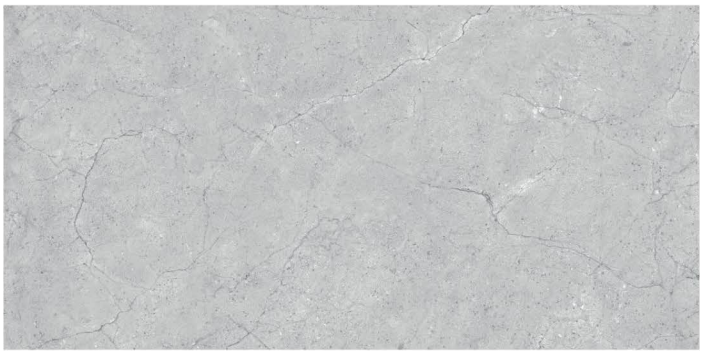






3751

Lwin
TILES

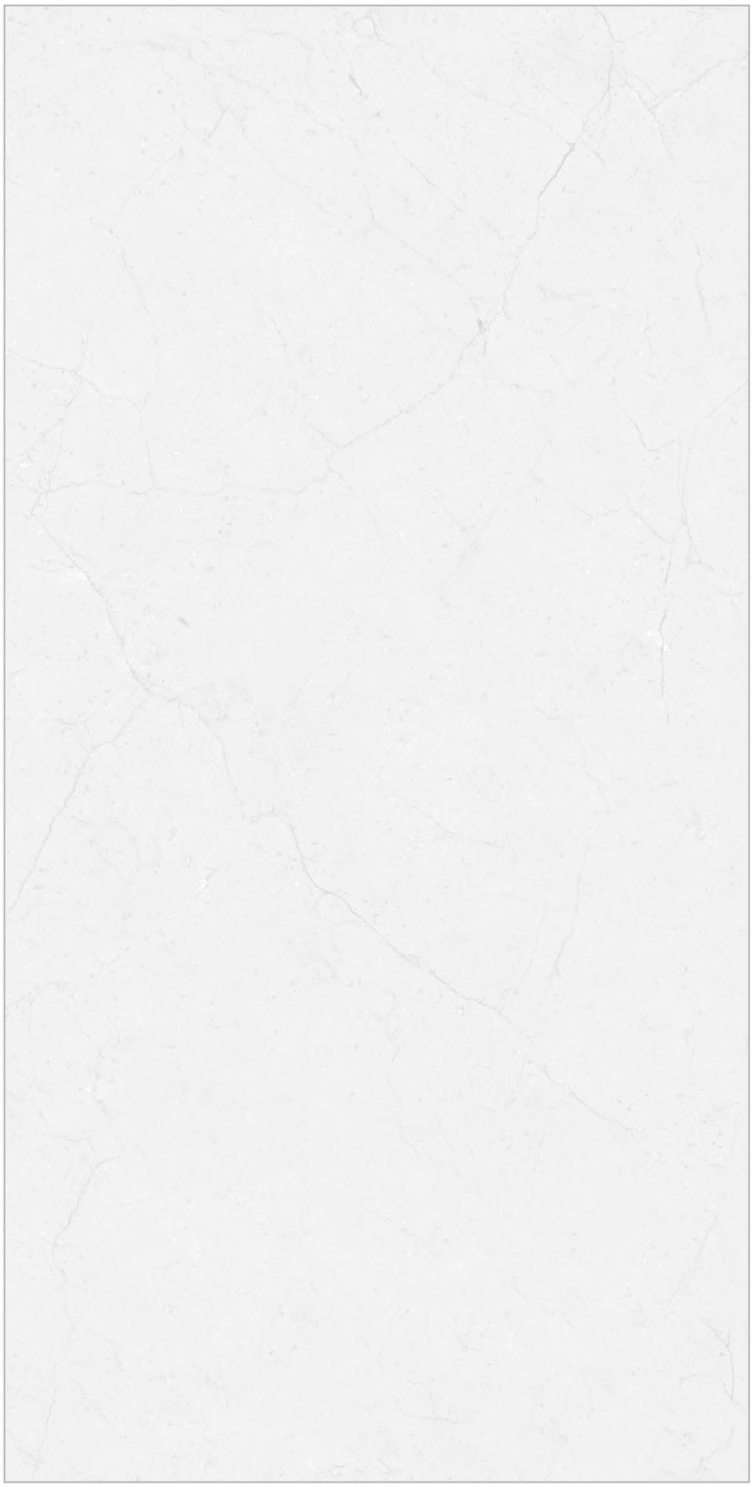








3752

Lwin
TILES





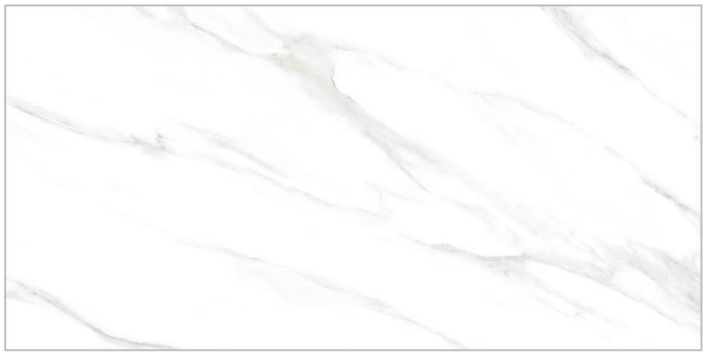



3753

Lwin
TILES









3754

Lwin
TILES










3755

Lwin
TILES





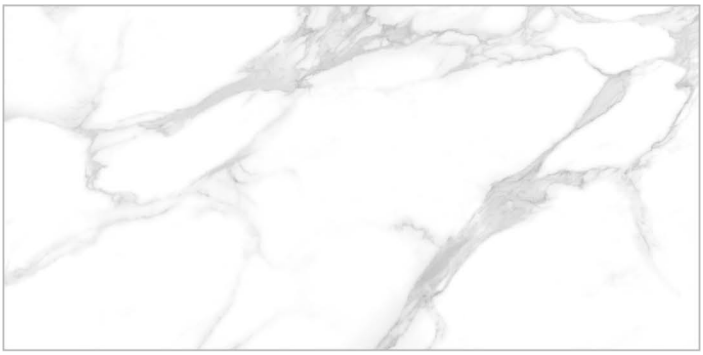



3756

Lwin
TILES


3757

Lwin
TILES







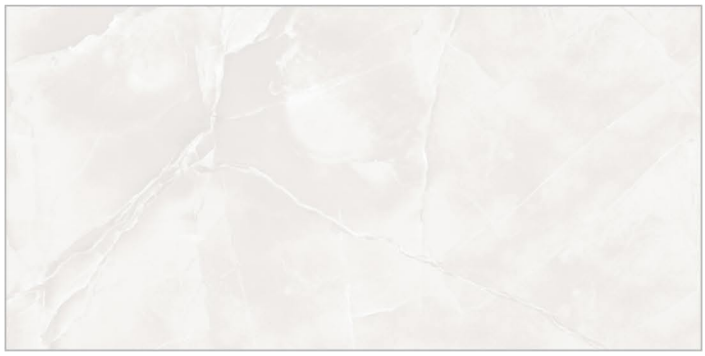

3758

Lwin
TILES









3759

Lwin
TILES









3760

Lwin
TILES










3761

Lwin
TILES

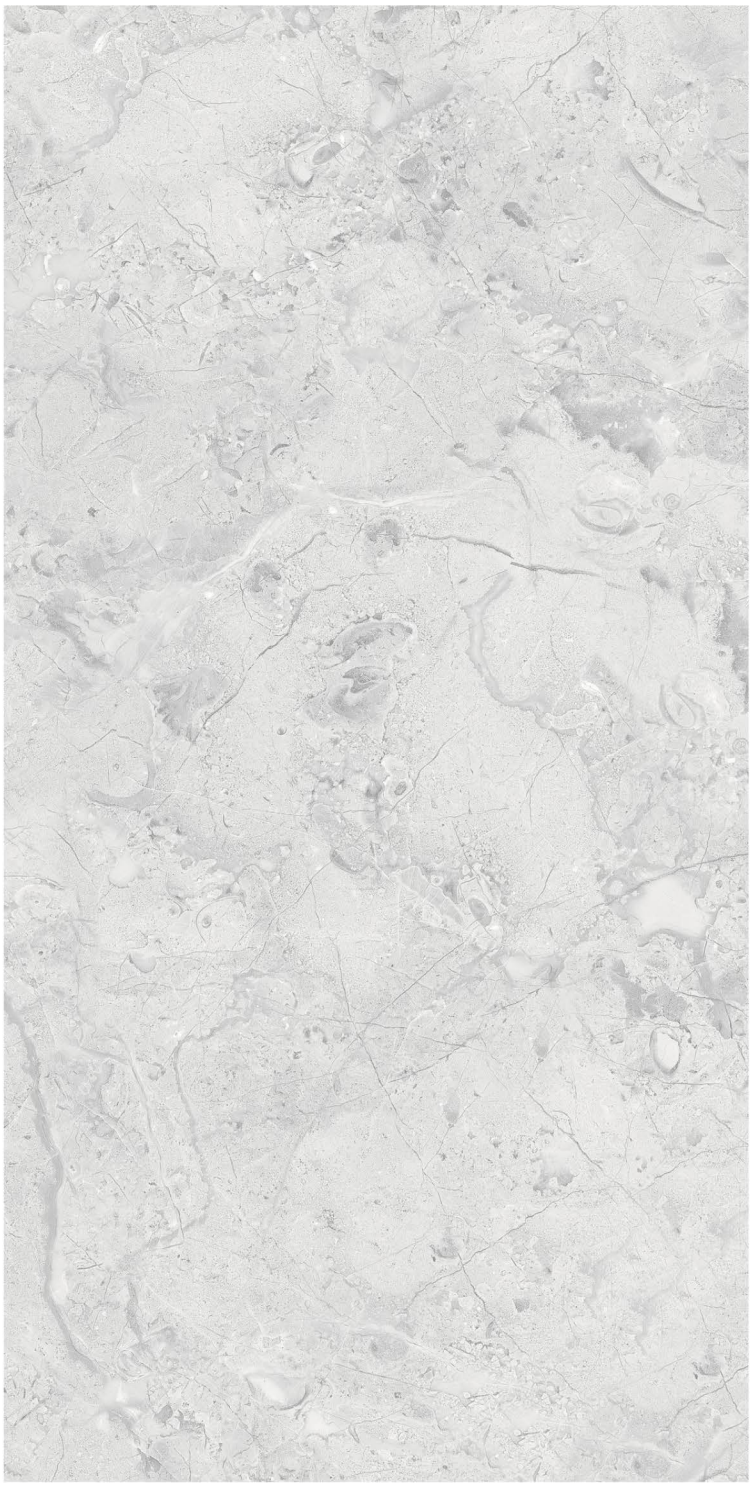







3762

Lwin
TILES










3763

Lwin
TILES

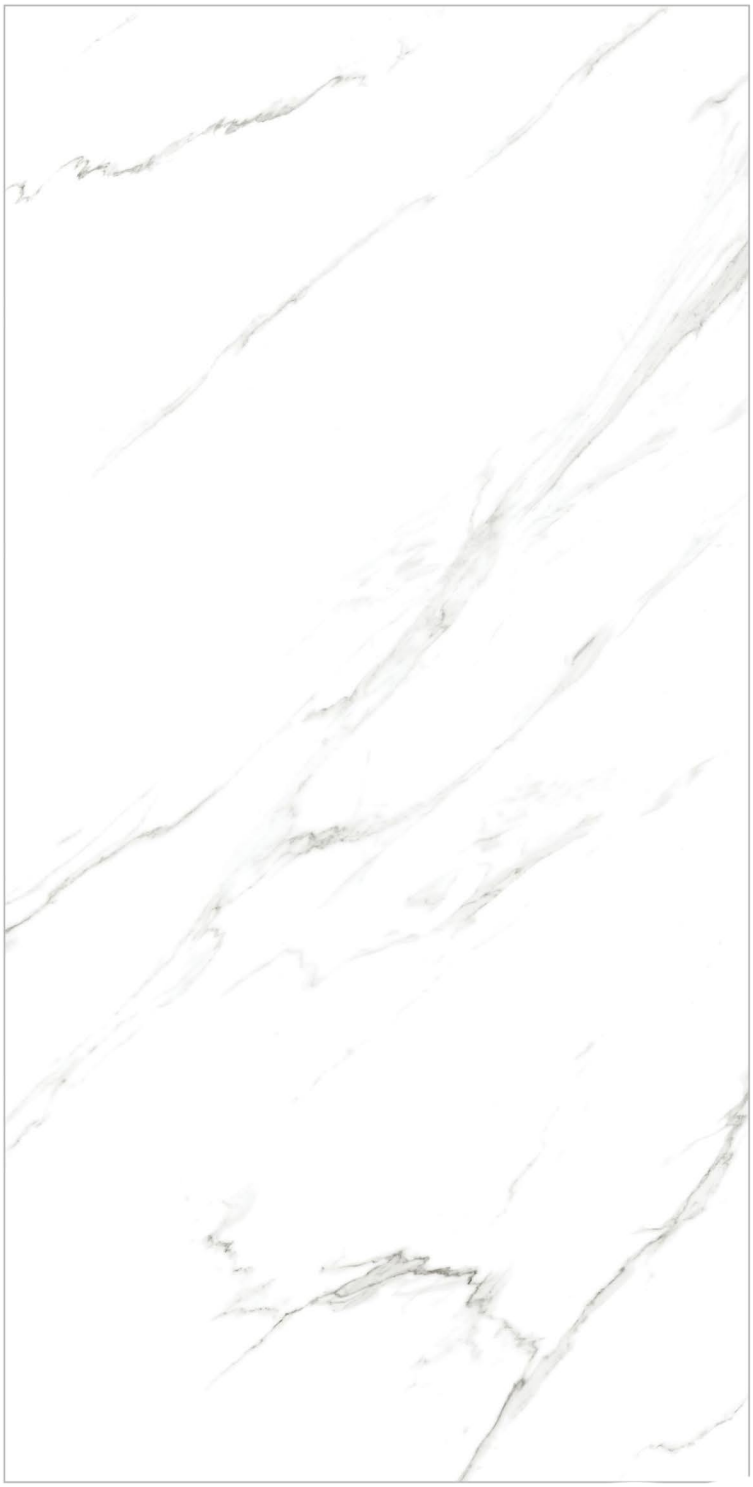








3764

Lwin
TILES



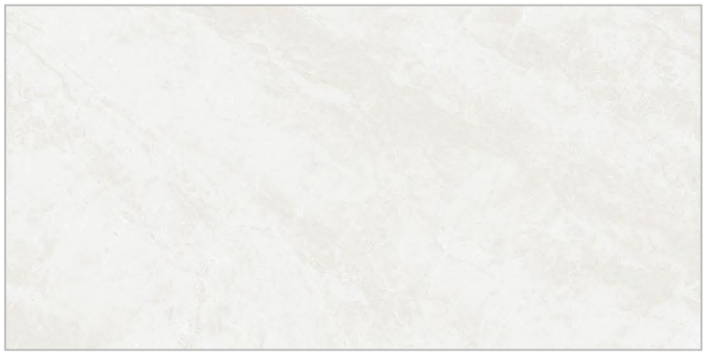





3765

Lwin
TILES











3766

Lwin
TILES

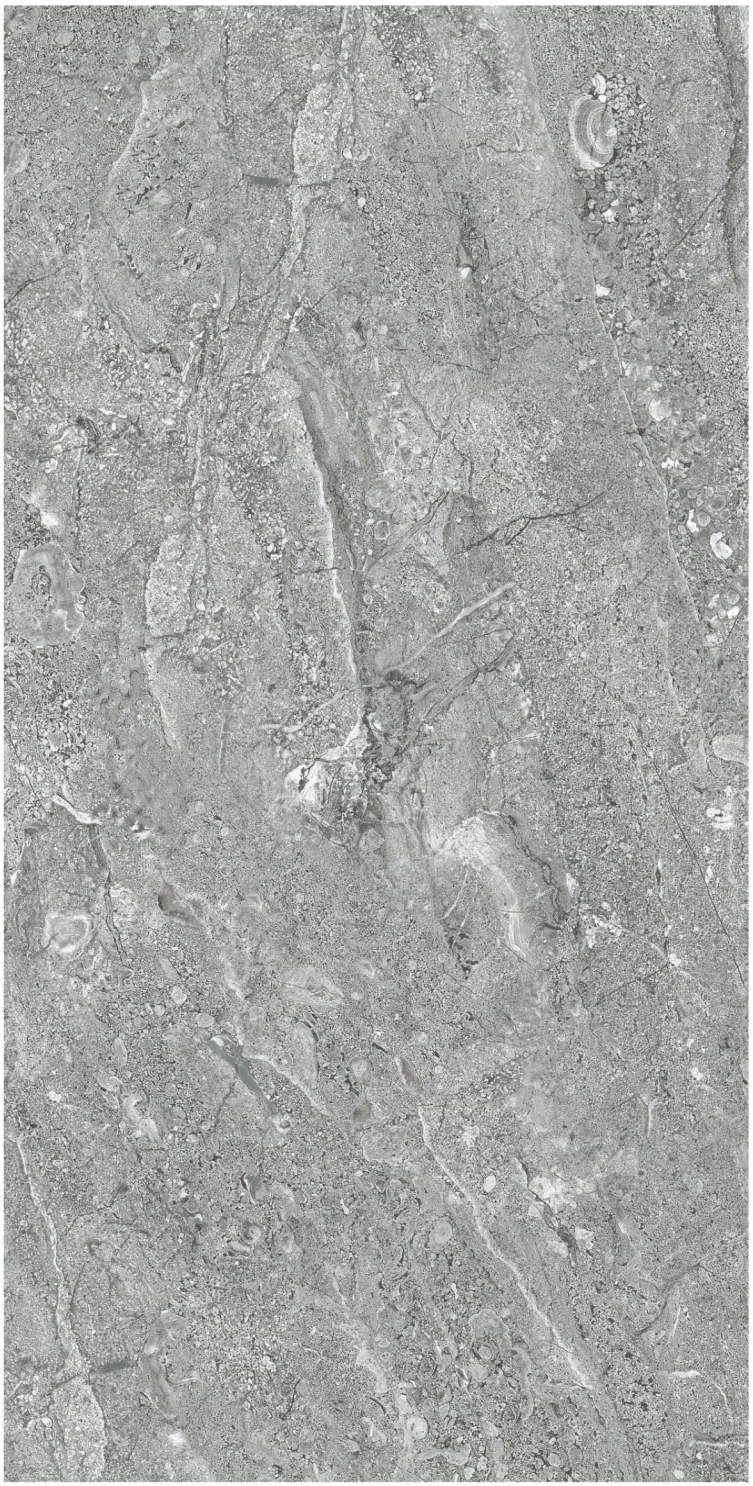

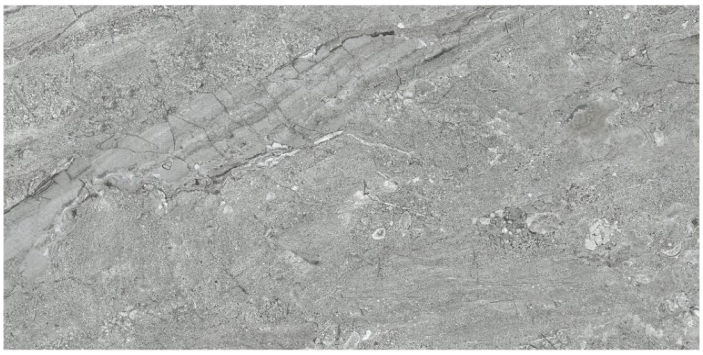





3767

Lwin
TILES










3768

Lwin
TILES

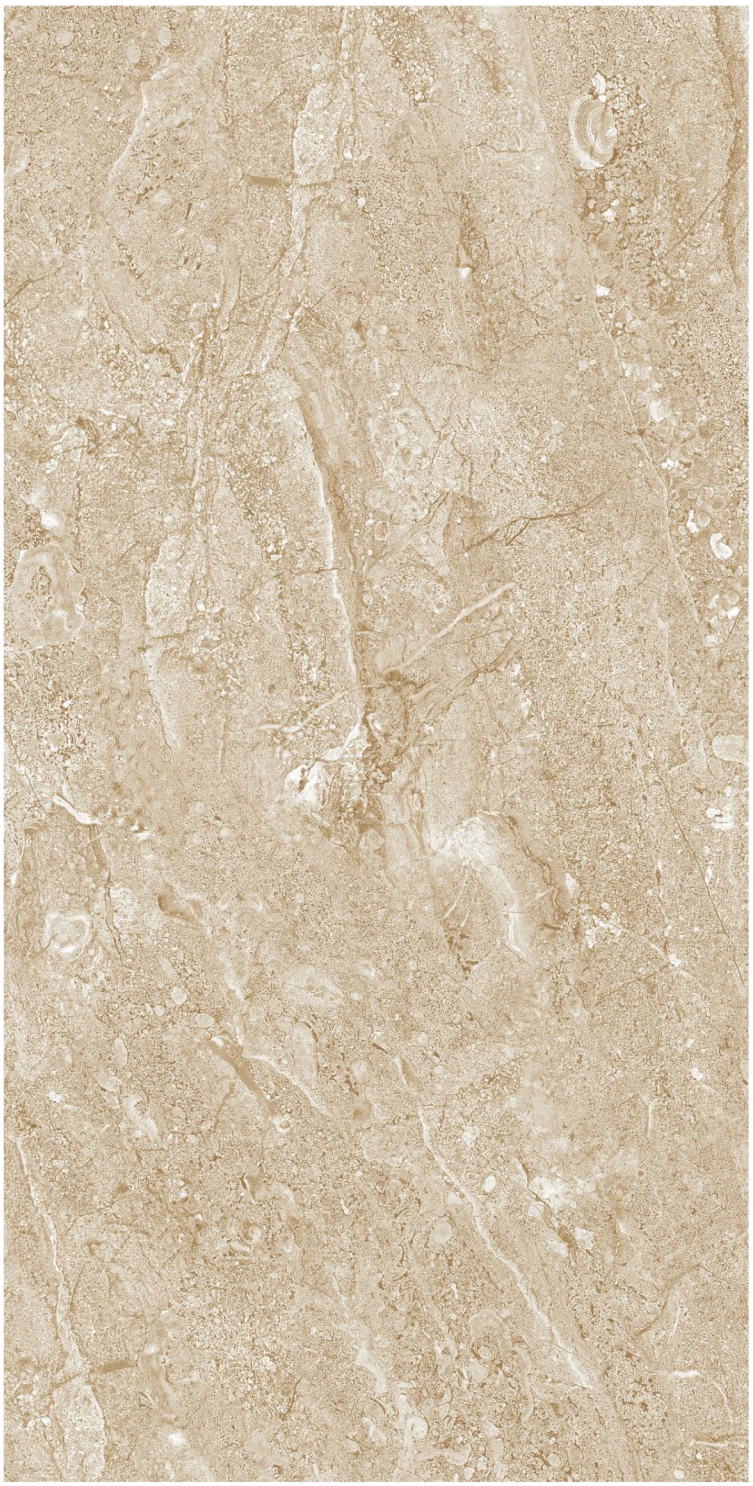







3769

Lwin
TILES










3770

Lwin
TILES



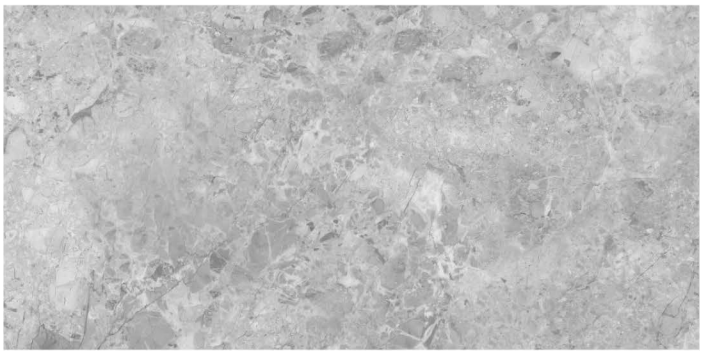





3771

Lwin
TILES










3772

Lwin
TILES

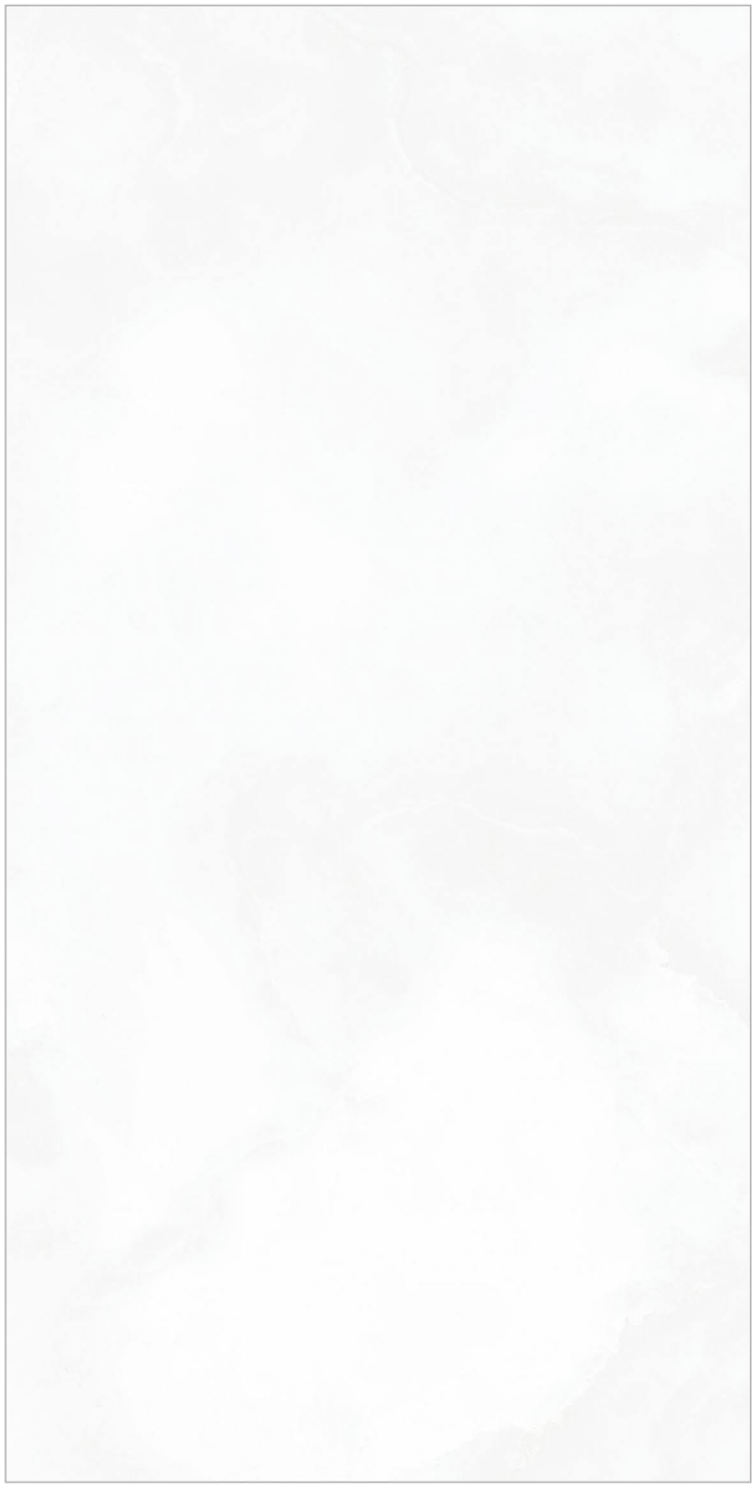







3773

Lwin
TILES









3774

Lwin
TILES









3775

Lwin
TILES











3776

Lwin
TILES

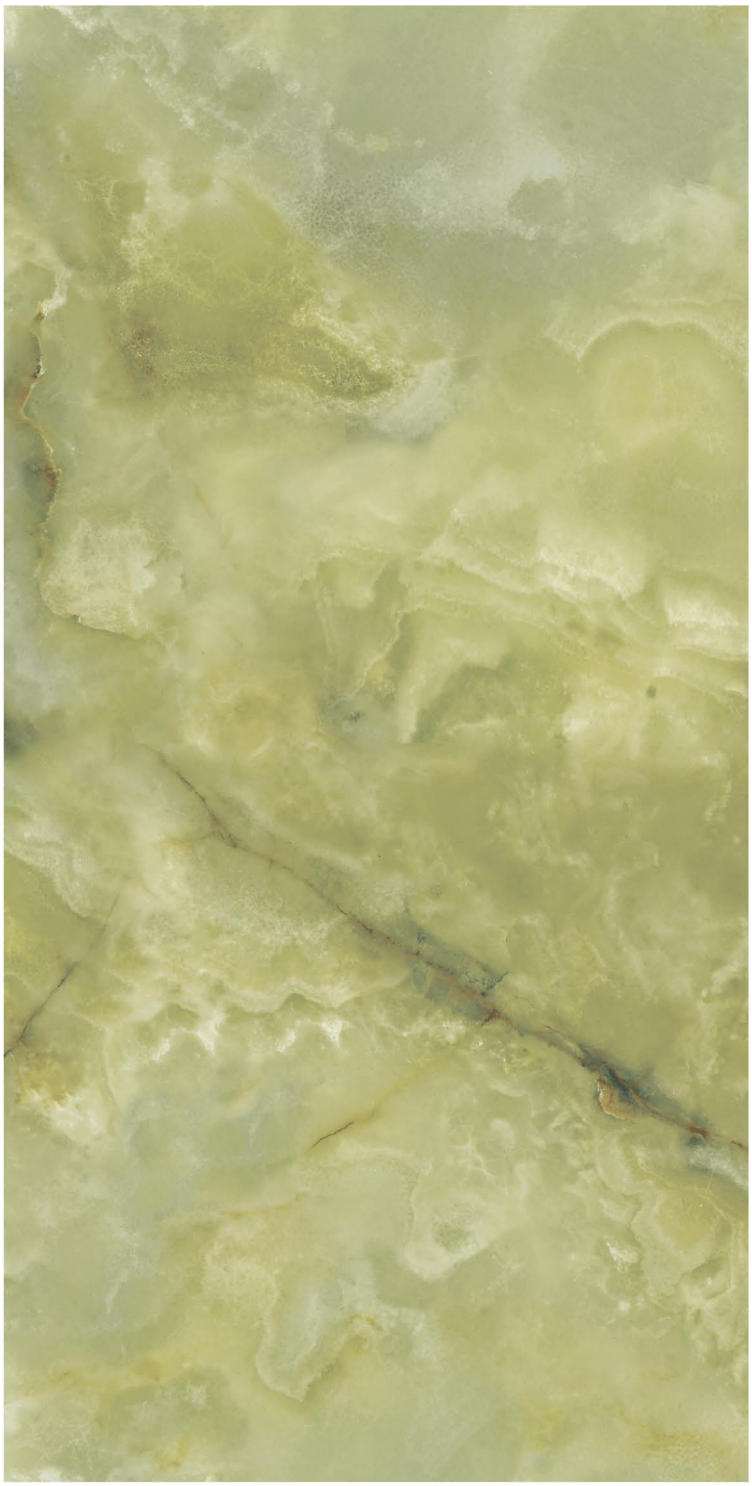



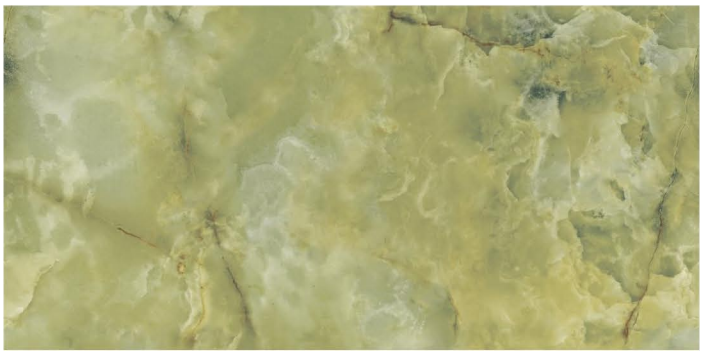



3777

Lwin
TILES









3778

Lwin
TILES

3779

Lwin
TILES









3780

Lwin
TILES









3781

Lwin
TILES









3782

Lwin
TILES









3783

Lwin
TILES









3784

Lwin
TILES









3785

Lwin
TILES










3786

Lwin
TILES



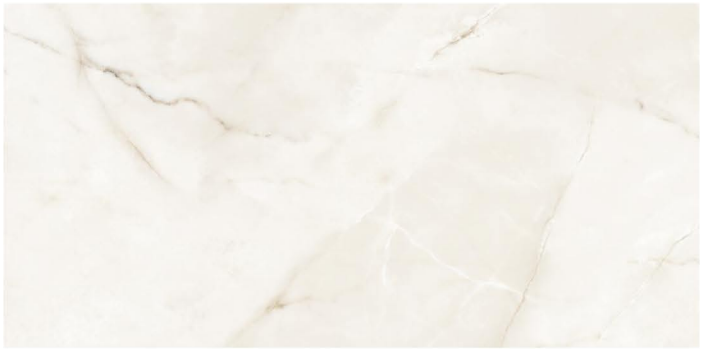



3787

Lwin
TILES










3788

Lwin
TILES

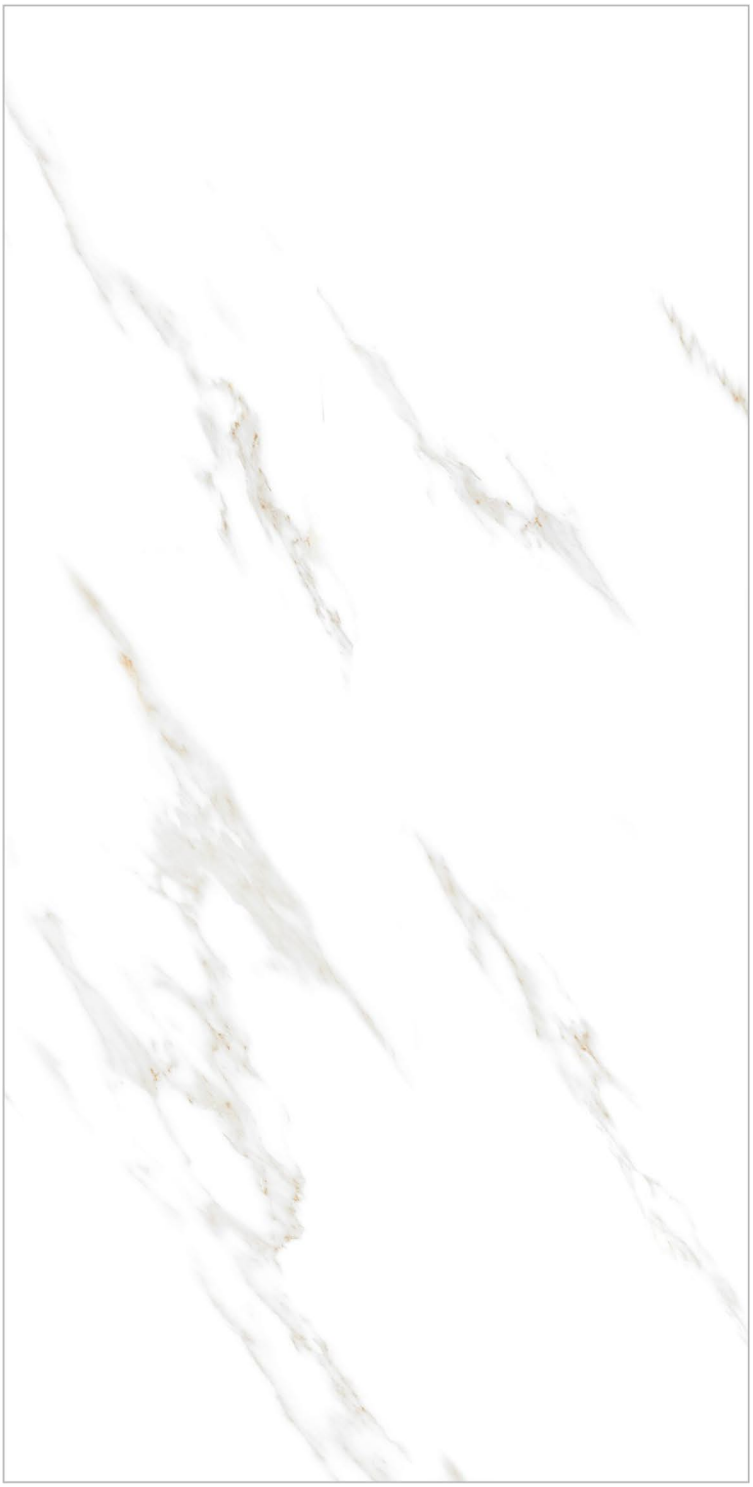








3789

Lwin
TILES

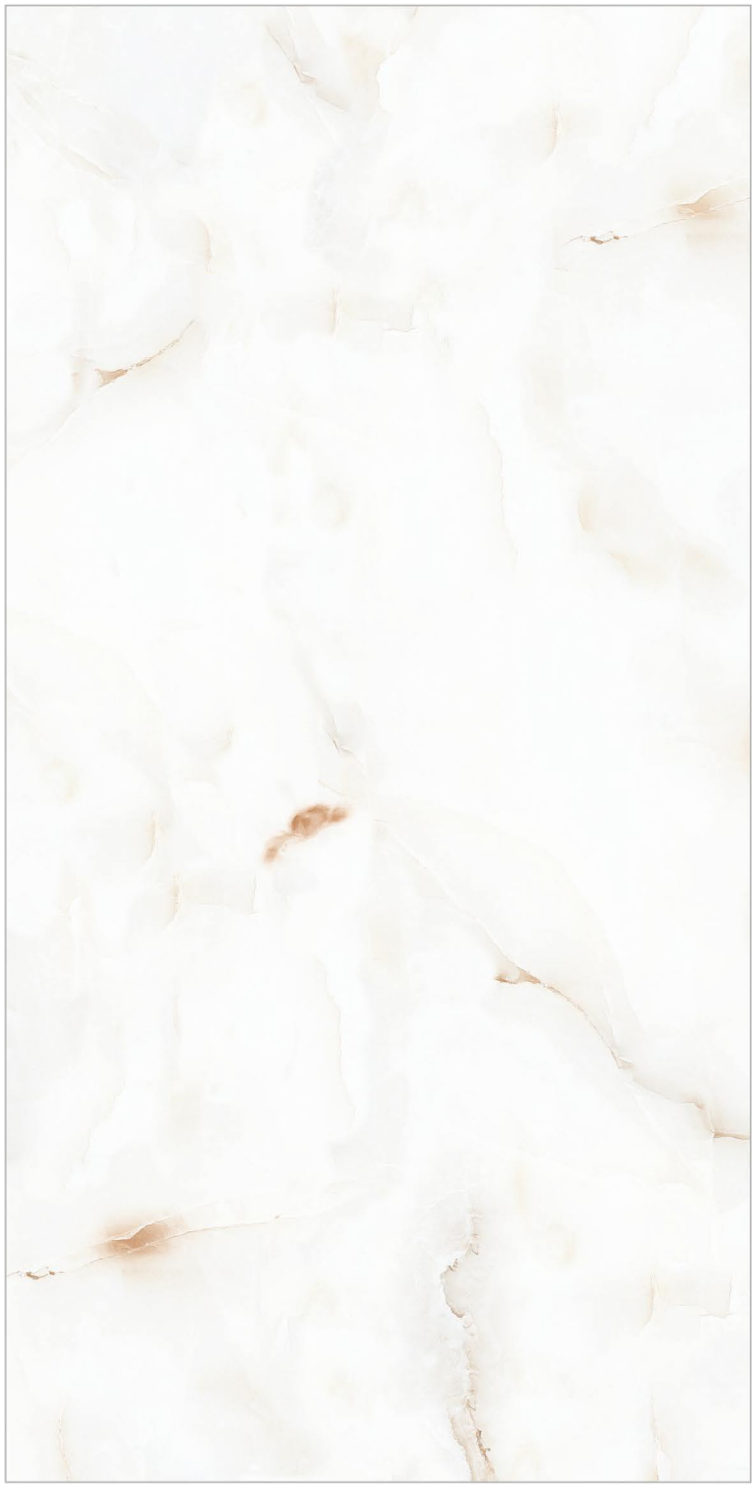







3790

Lwin
TILES









3791

Lwin
TILES

3792

Lwin
TILES









3793

Lwin
TILES



3794

Lwin
TILES









3795

Lwin
TILES









3796

Lwin
TILES









3797

Lwin
TILES









3798

Lwin
TILES










3799

Lwin
TILES

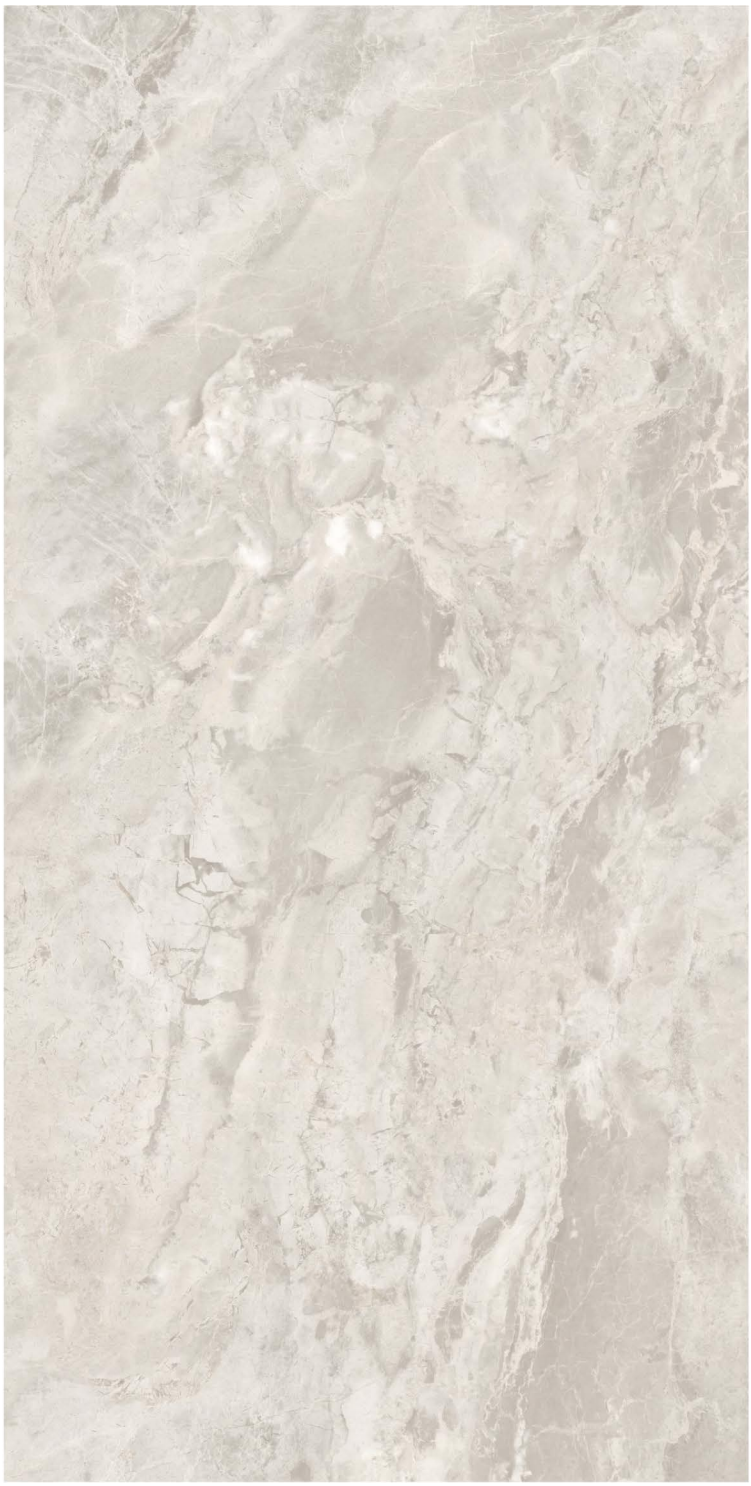







3800

Lwin
TILES









3801

Lwin
TILES









3802

Lwin
TILES









3803

Lwin
TILES









3804

Lwin
TILES









3805

Lwin
TILES









3806

Lwin
TILES









3807

Lwin
TILES










3808

Lwin
TILES

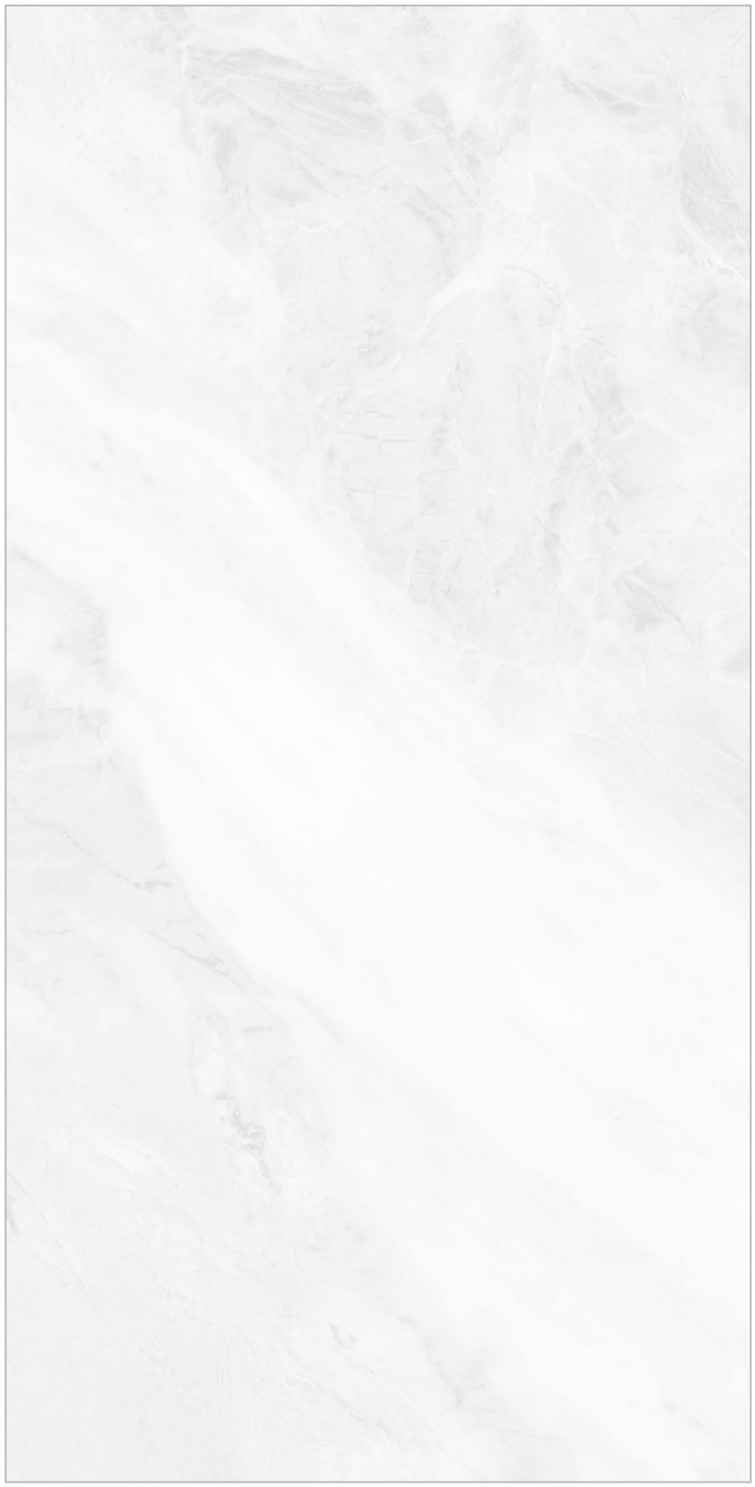








3809

Lwin
TILES







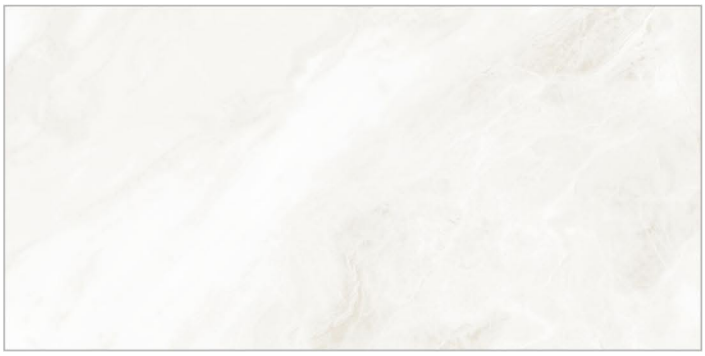

3810

Lwin
TILES









3811

Lwin
TILES









3812

Lwin
TILES









3813

Lwin
TILES









3814

Lwin
TILES









3815

Lwin
TILES









3816

Lwin Tiles Quality Standards

Standards according to **ISO 13006: Annex G - EN 14411: Annex G.** Dry - Pressed Ceramic Tiles. **Group BIa (E_b 0.5%)**

Technical Feature	Test Method	Requirements		Values	
		%	mm	%	mm
A. Dimensions and Surface Quality					
Length and Width	UNI EN ISO 10545-2	± 0.6%	± 2.0	± 0.20%	± 1.0
Thickness		± 5.0%	± 0.5	± 5.00%	± 0.5
Straightness of Sides		± 0.5%	± 1.5	± 0.20%	± 1.0
Rectangularity		± 0.5%	± 2.0	± 0.20%	± 1.2
Surface Flatness					
a) Centre curvature		± 0.5%	± 2.0	± 0.20%	± 1.0
b) Edge curvature		± 0.5%	± 2.0	± 0.20%	± 1.0
c) Warpage		± 0.5%	± 2.0	± 0.20%	± 1.0
Surface Quality		A minimum of 95% of the tiles shall be free from visible defects that would impair the appearance of a major area of tiles.		Compliant	
B. Physical Properties					
Water Absorption	UNI EN ISO 10545-3	$E_b \leq 0.5\%$ Individual maximum : 0.6% (absorbed water mass)		$E_b \leq 0.1\%$ (absorbed water mass)	
Breaking Strength	UNI EN ISO 10545-4	Min. 1300 N		≥ 1700 N	
Modulus of Rupture		Average minimum 35 N/mm² Individual minimum 32 N/mm²		≥ 37 N/mm²	
Frost Resistance	UNI EN ISO 10545-12	Required		Compliant	
Coefficient of Linear Thermal Expansion From Ambient Temperature to 100°c	UNI EN ISO 10545-8	Required		$6 \times 10^{-6}\ K^{-1}$ max	
Scratch Hardness (Mohs scale)	EN 101	Declared by the producer		3 to 6 Depends on Finish & Color	
Crazing Resistance	UNI EN ISO 10545-11	Declared by the producer		4 Cycle Pass	
C. Chemical Properties					
Resistance to Staining	UNI EN ISO 10545-14	Minimum Class 3		5	
Resistance to Household Chemicals and Swimming Pool Salts	UNI EN ISO 10545-13	Minimum GB		GA	
Resistance to Low Concentrations of Acids and Alkalis		To be reported		GLA	
Resistance to High Concentrations of Acids and Alkalis		To be reported		GHA	

Note: Colours shown are as accurate as the limitations of the printing results on paper are possible. Prospective customers are advised to inspect a sample of the tile before placing the order. Every effort has been taken to ensure the accuracy of the information given. However, the company reserves its right to change/alter the specifications without any prior notice. Sometime shade variation or size variation may occur, as this is inherent property of ceramic tile industry. Before fixing the tiles, all are advised to follow the laying instructions printed on the corrugated box of the tile. Company does not take/carry any responsibility of what so ever nature, once tiles are laid.

Lwin
TILES

Office

Om Decora 9 Square,150 Feet Ring Road,
Nana Muva, Rajkot Gujarat 360003 - INDIA

Factory

Jivapar Jetpar Road,
Near Levita Granito LLP Morbi Gujarat 363630 - INDIA
www.L-wintiles.com
Info@L-wintiles.com

Designed By @lshitvastudio