


Glossy

Series



Available Sizes

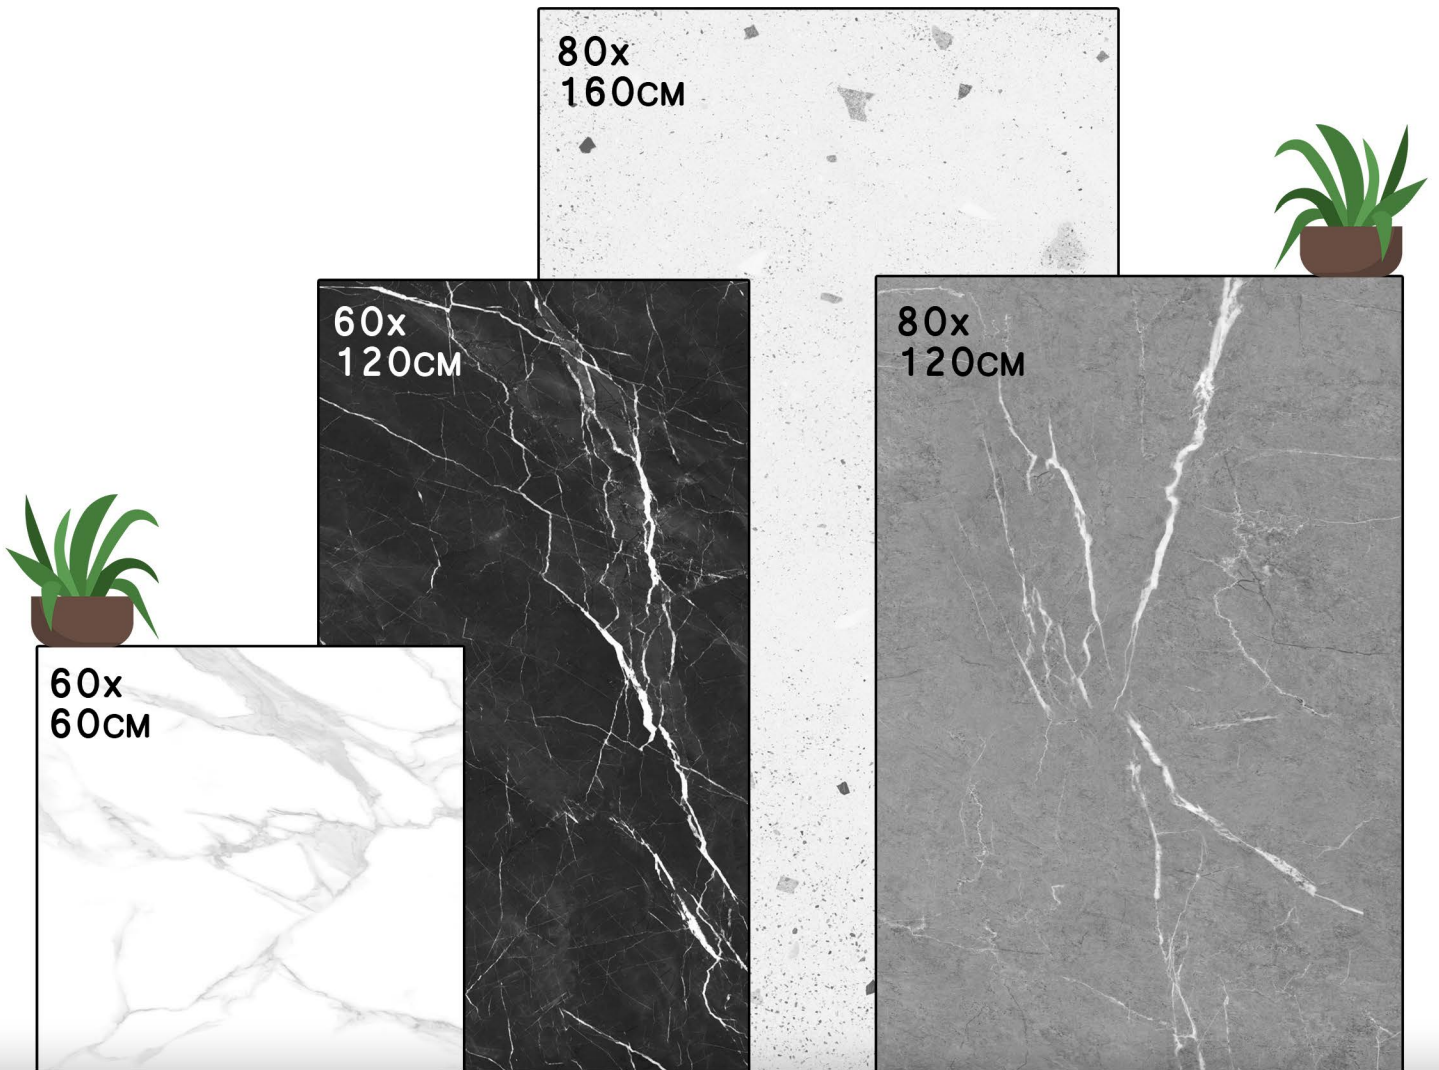

Dimensional
Stability



Acid
Resistance



Stain
Resistance



High
Durable



Home
Applicable



Factory
Applicable




Supermart
Applicable



Hotel
Applicable



About Us

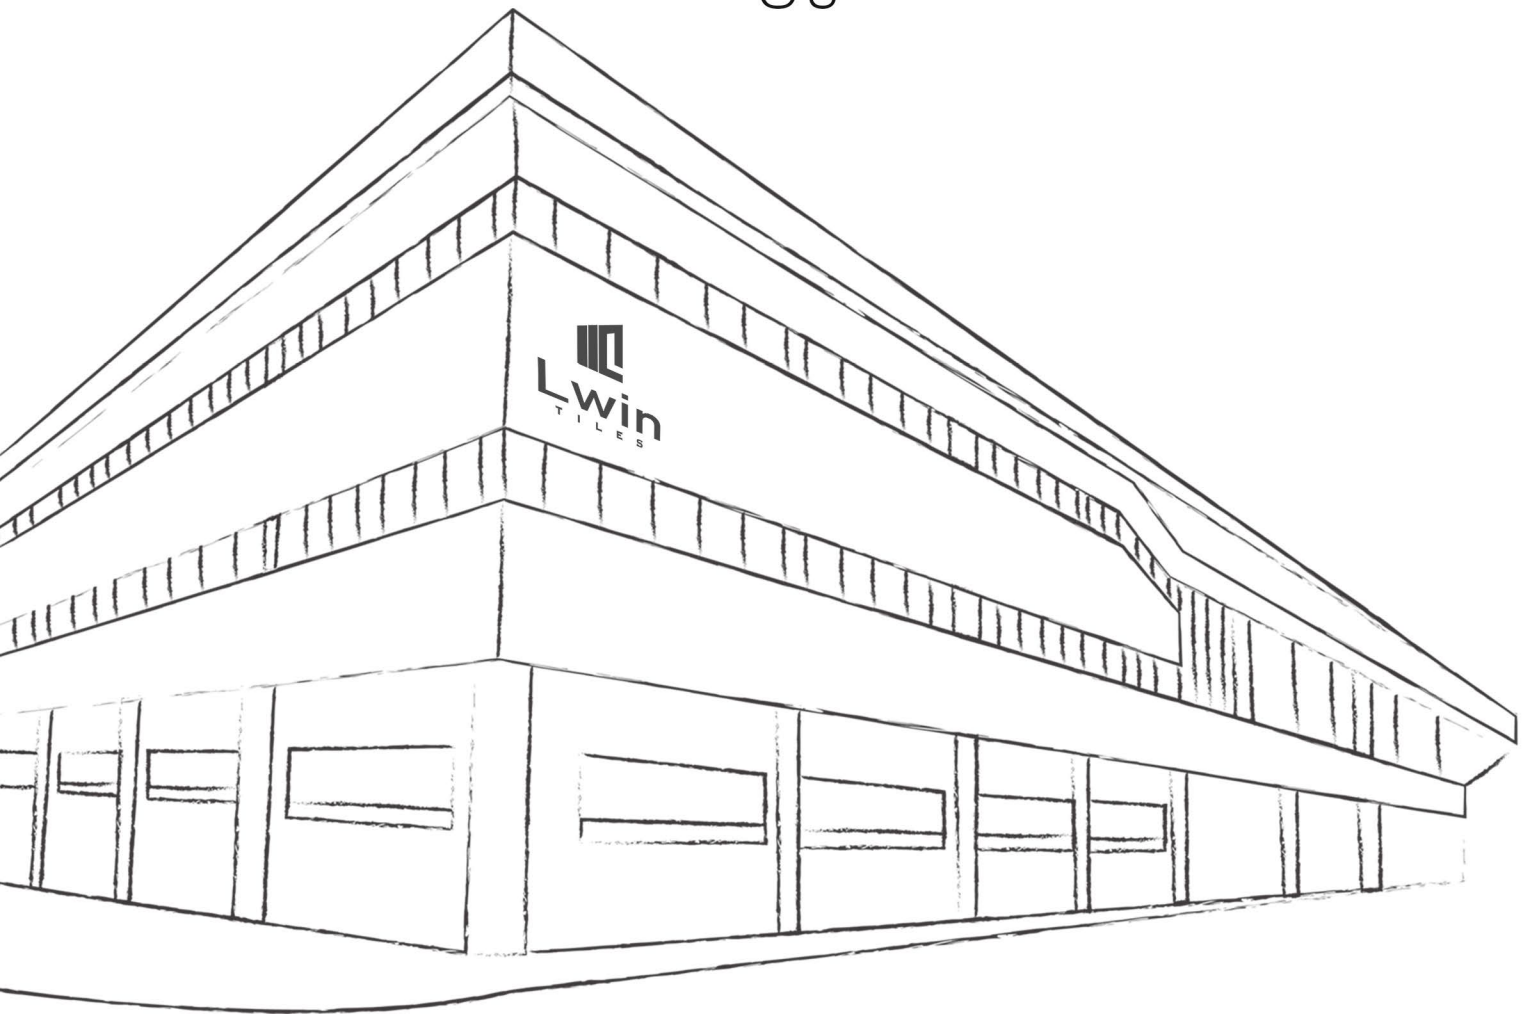

Our **Units** are well equipped with the best technology that allowing us to produce high-quality tiles with a cosistently impeccable finish.

Our excellent **Team** closely monitor every phase of the process. They put greatest effort to deliver on our commitments so that we can creat value for our customers.


Our different and wide range of **Design** collections which consist of technical properties.



3663



3664

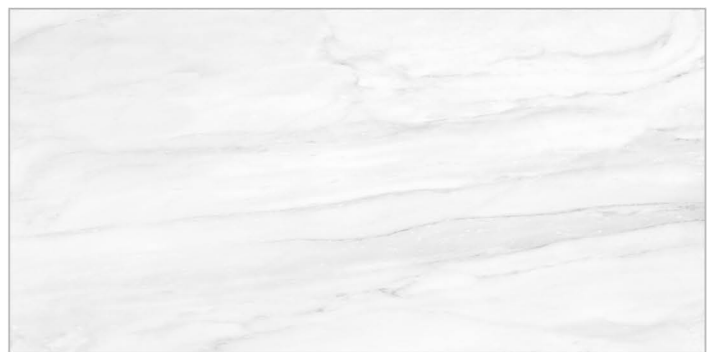




3665





3666





3667

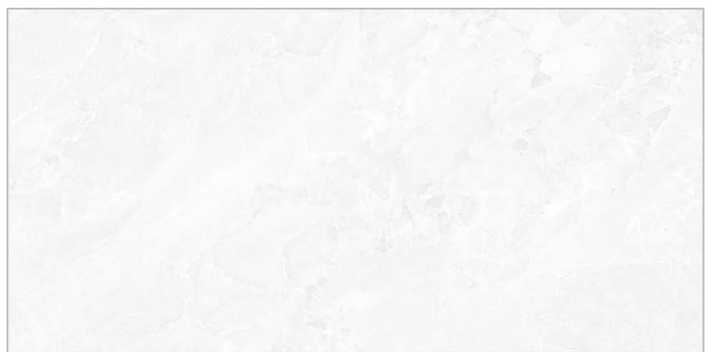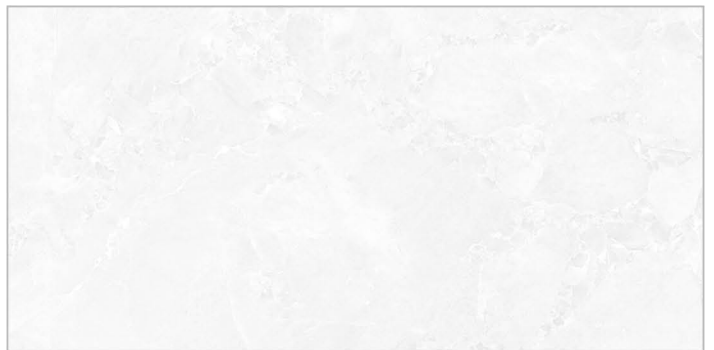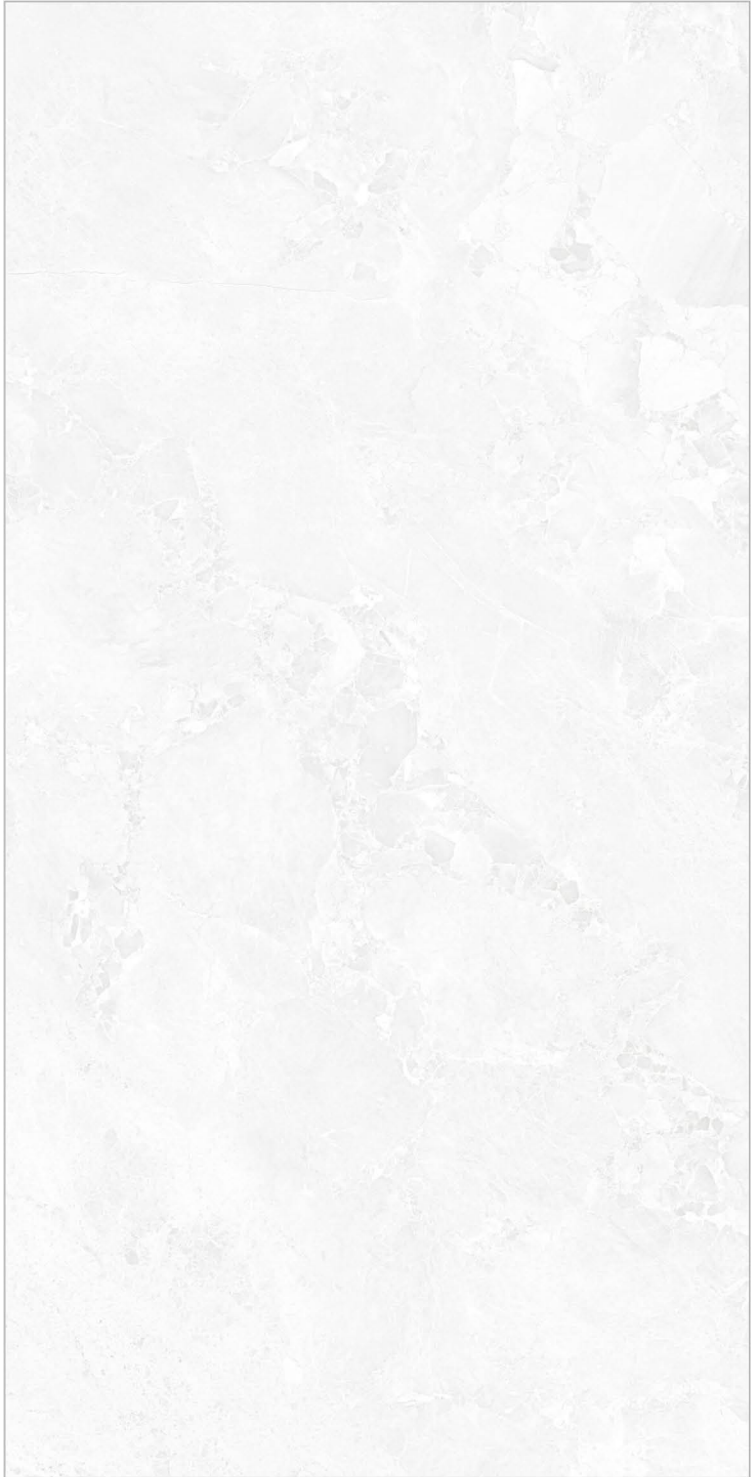

3668

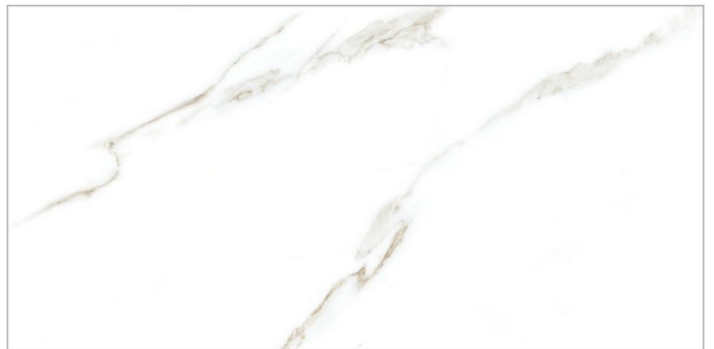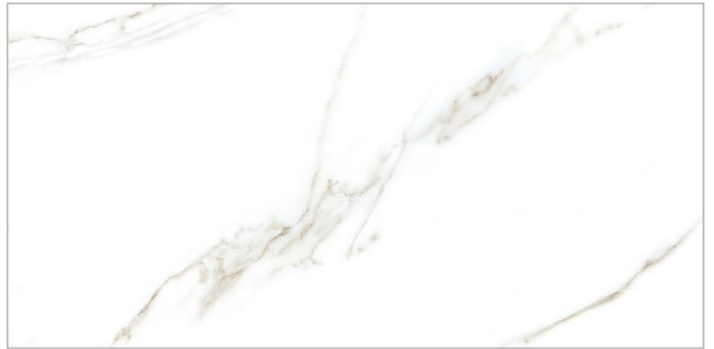

3669

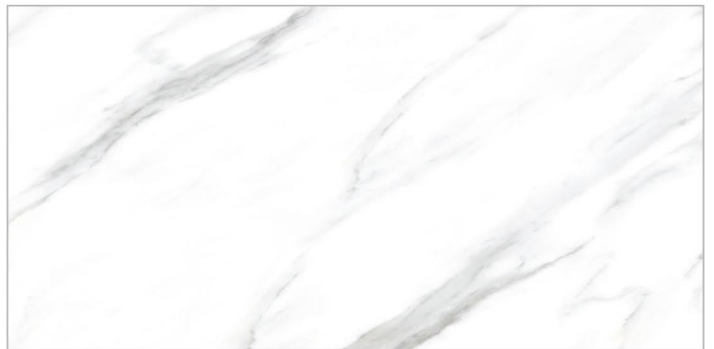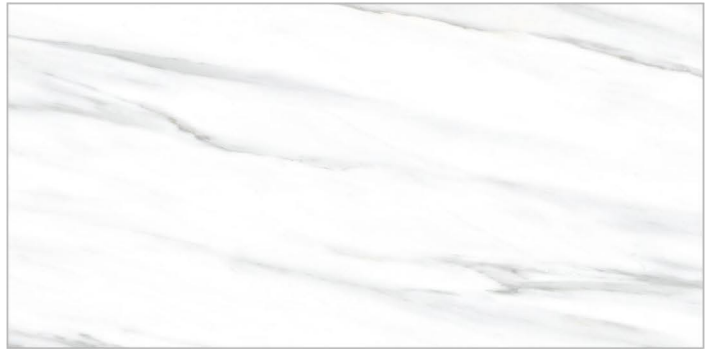

3670





3671



3673




3674

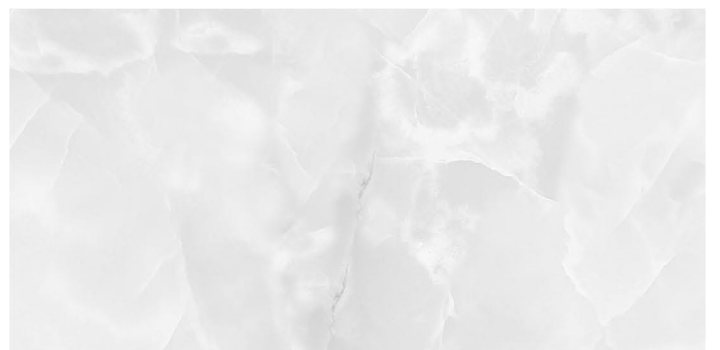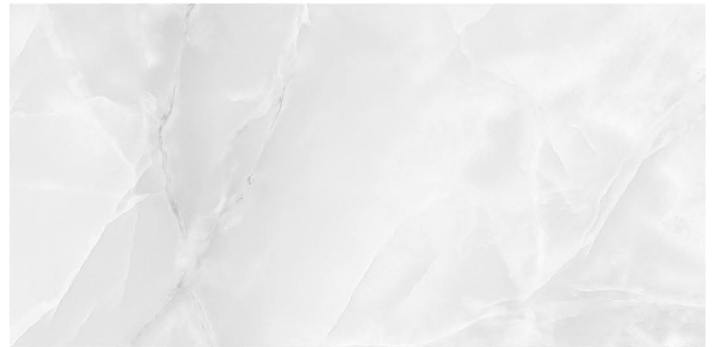




3675





3676

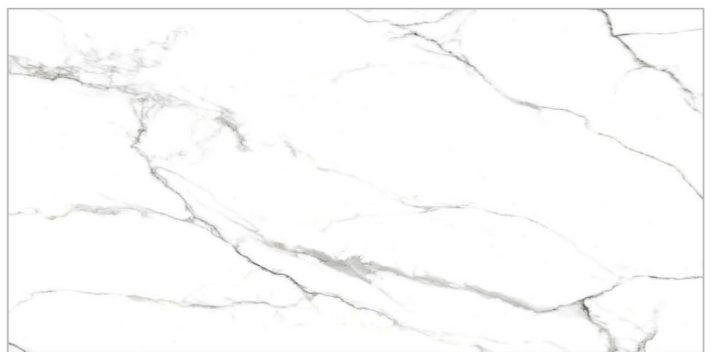

3677

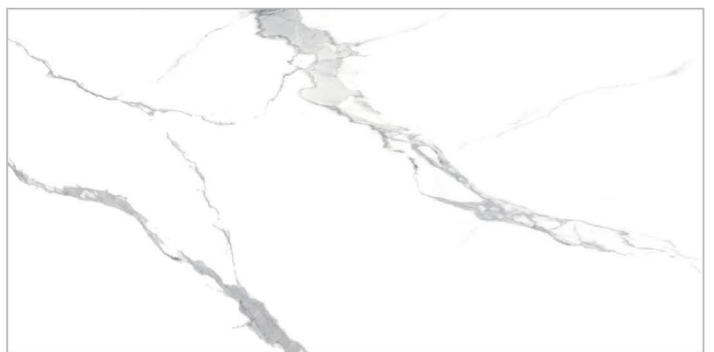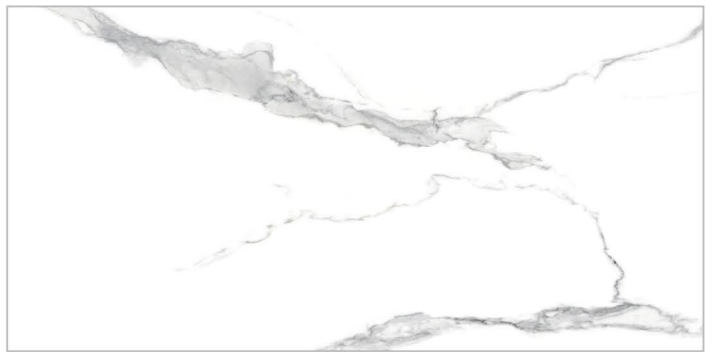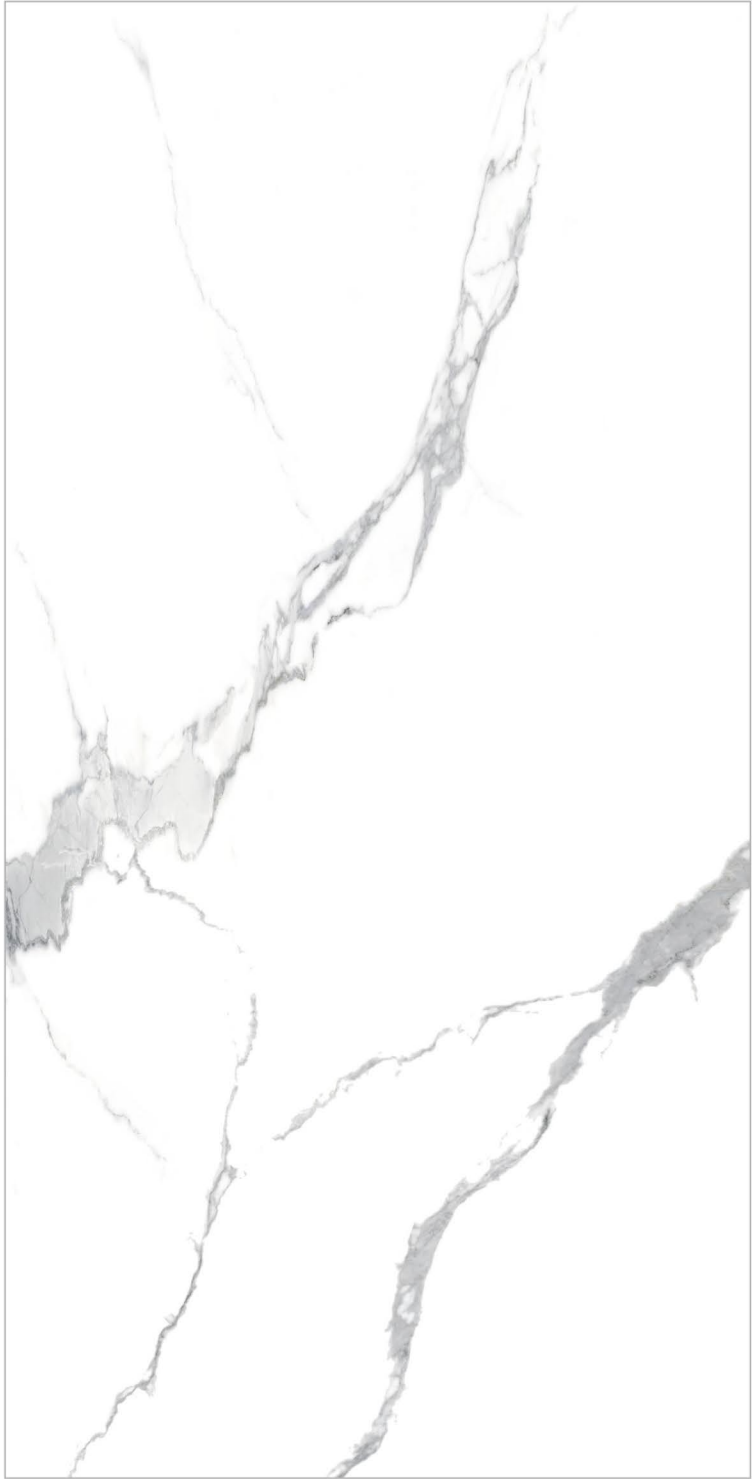

3678

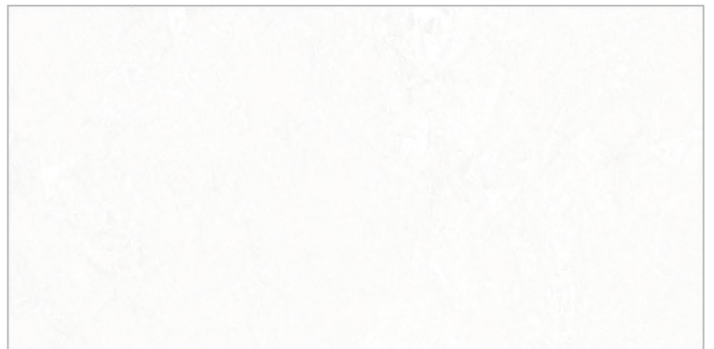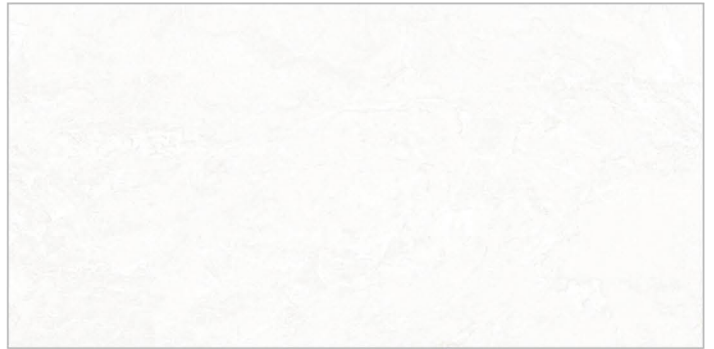

3679





3681



3682




3683

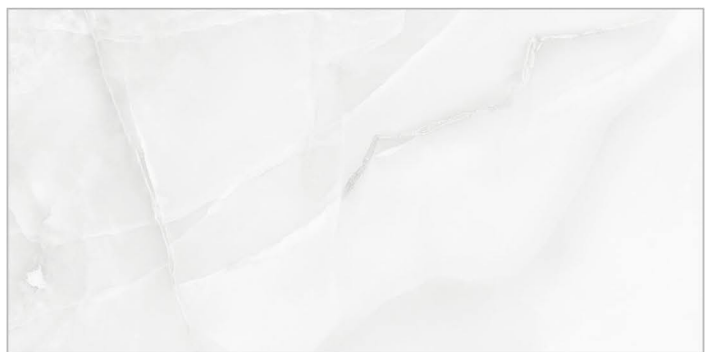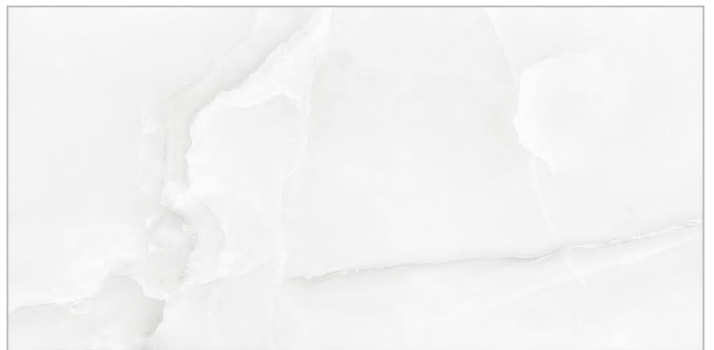


3684





3685

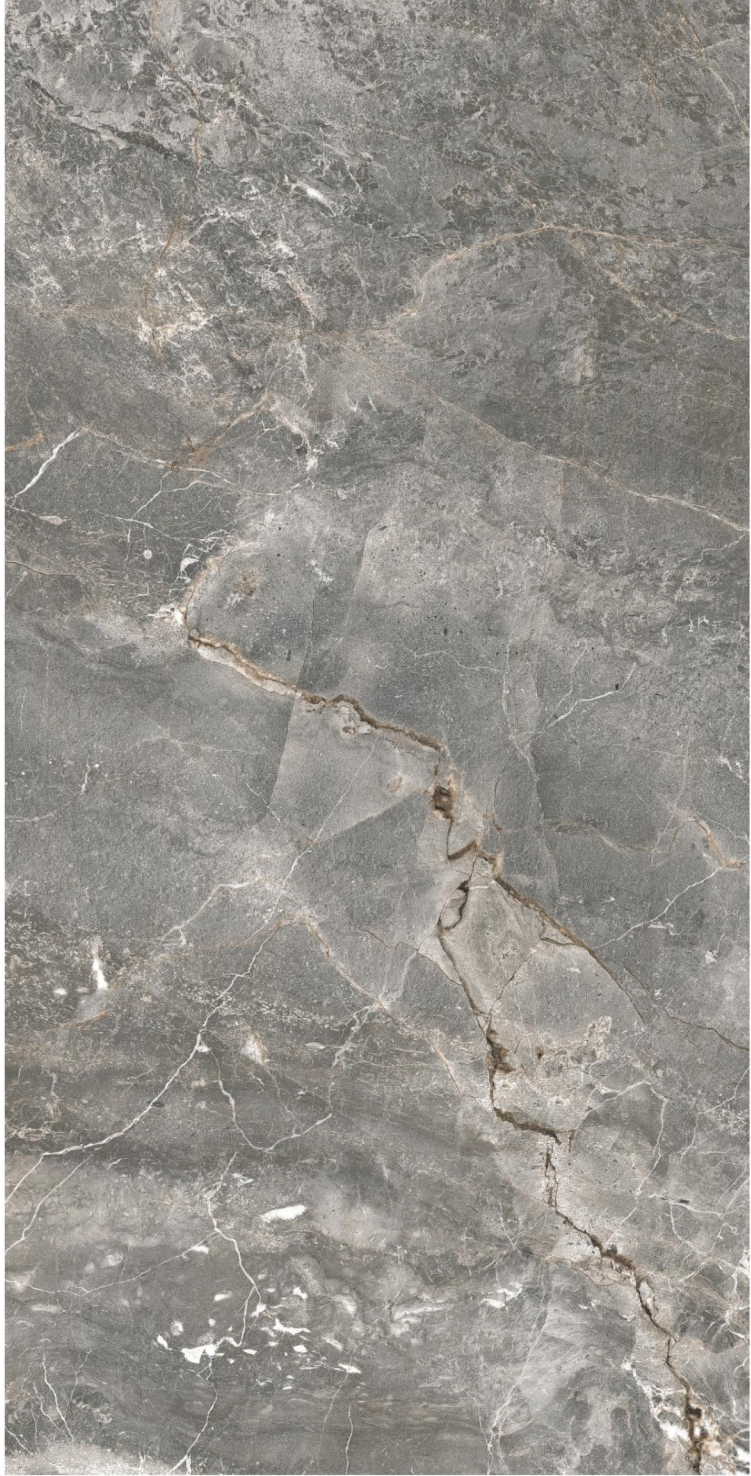


3686

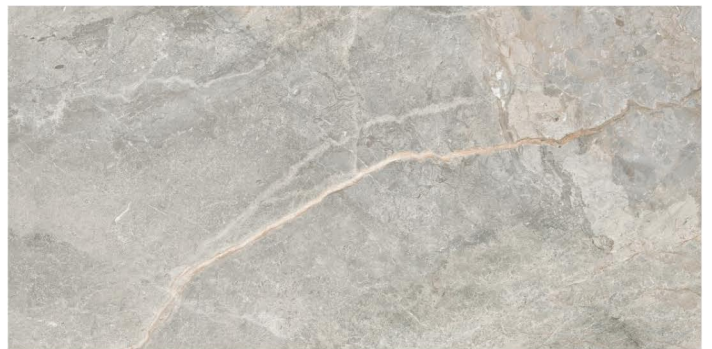

3687

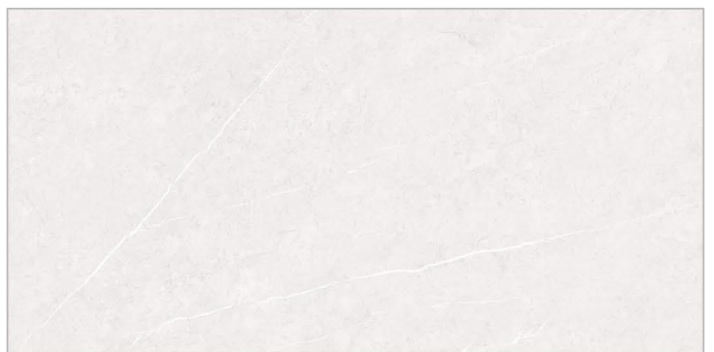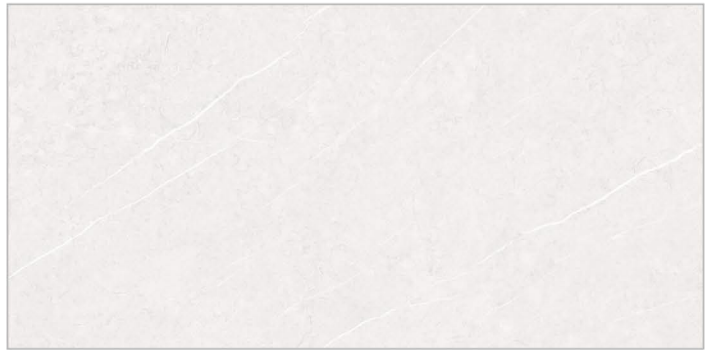

3688

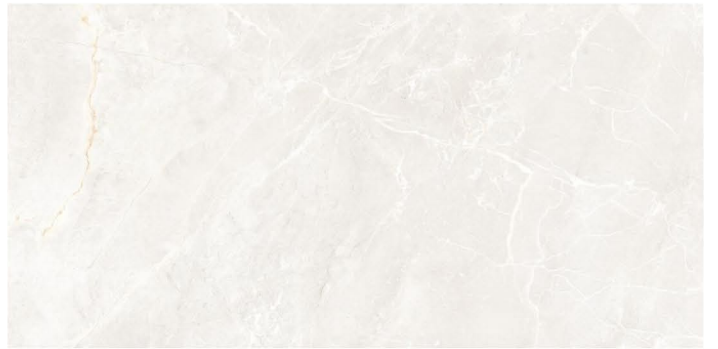

3689



3690




3691



3692




3693

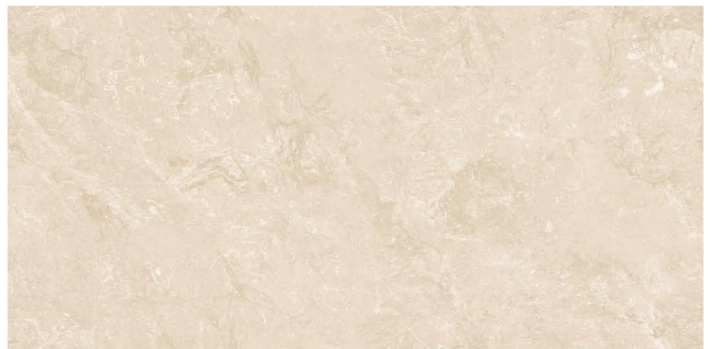

3694



3695

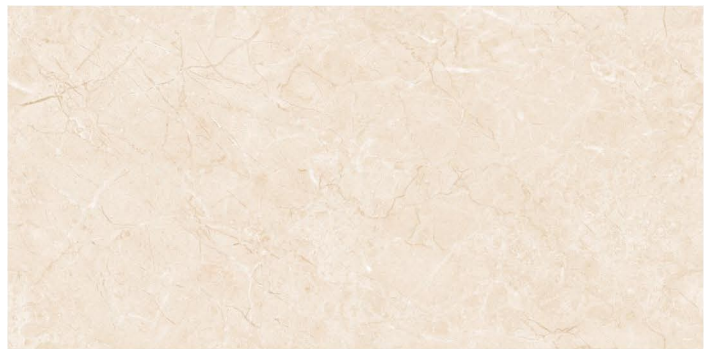


3696






3697






3698

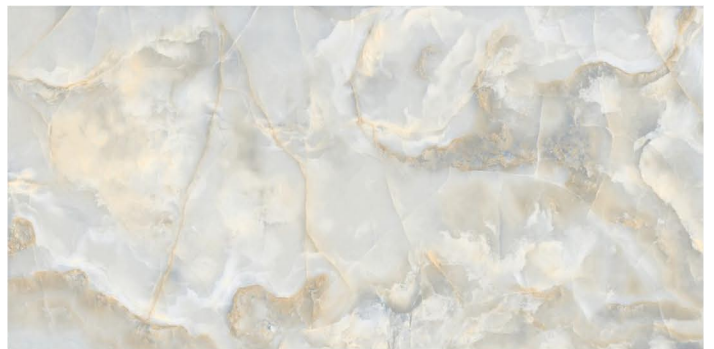



3699

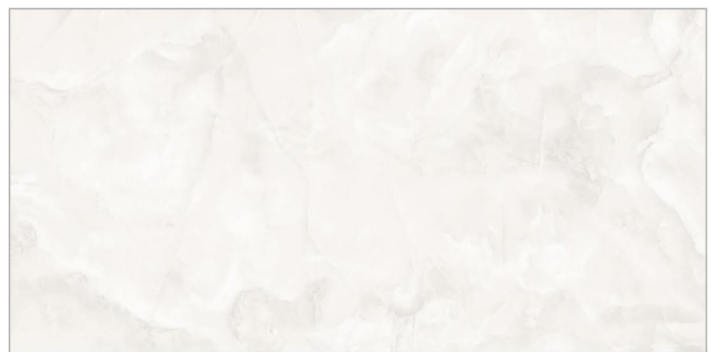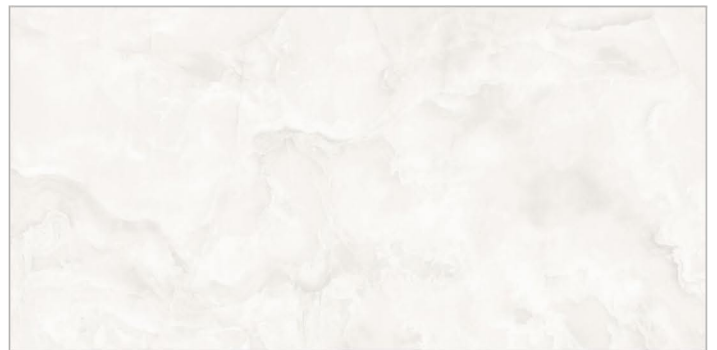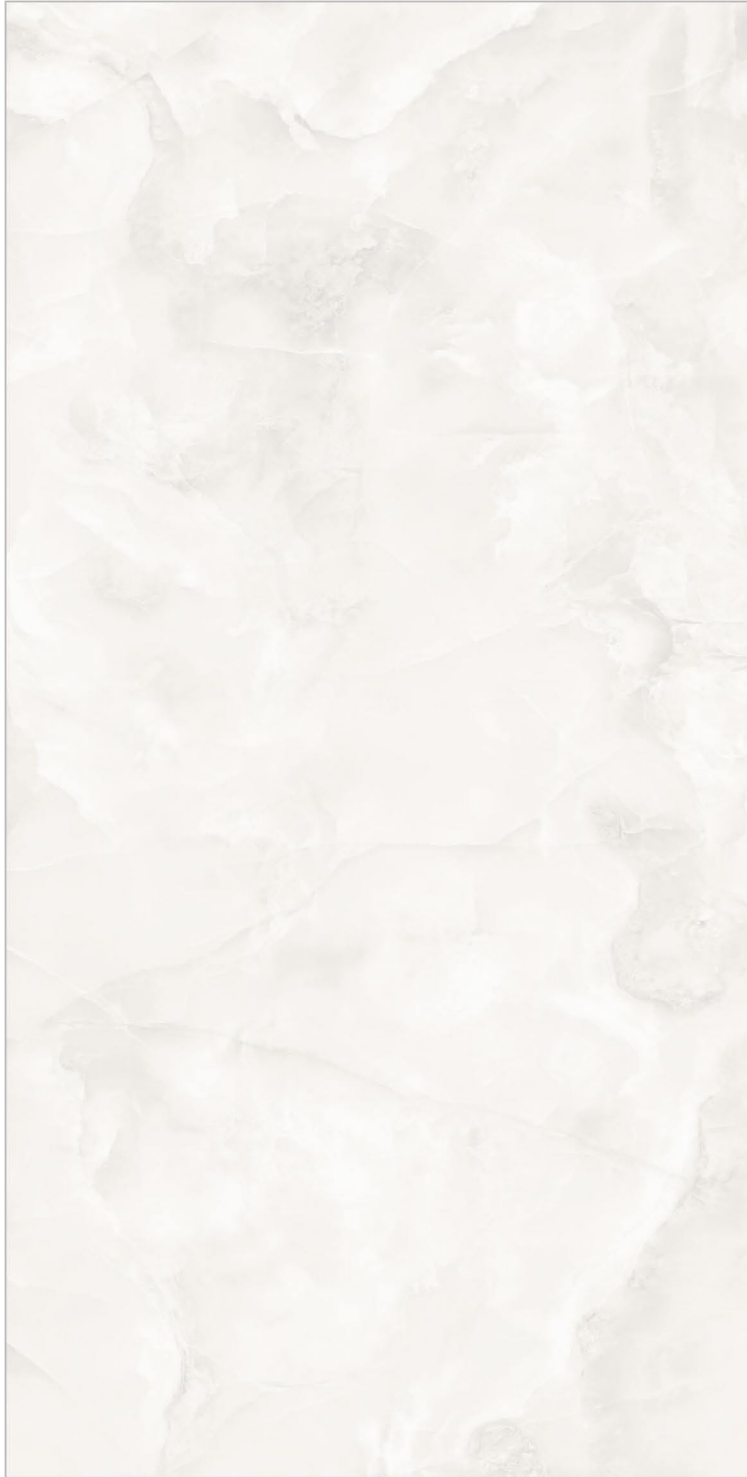



3700

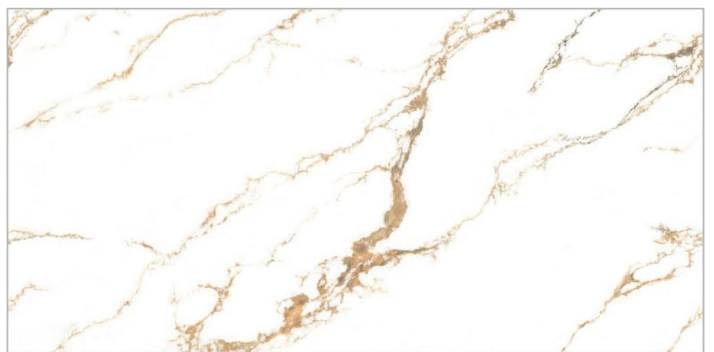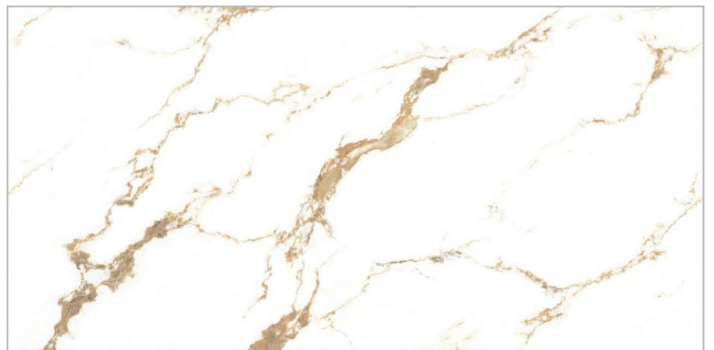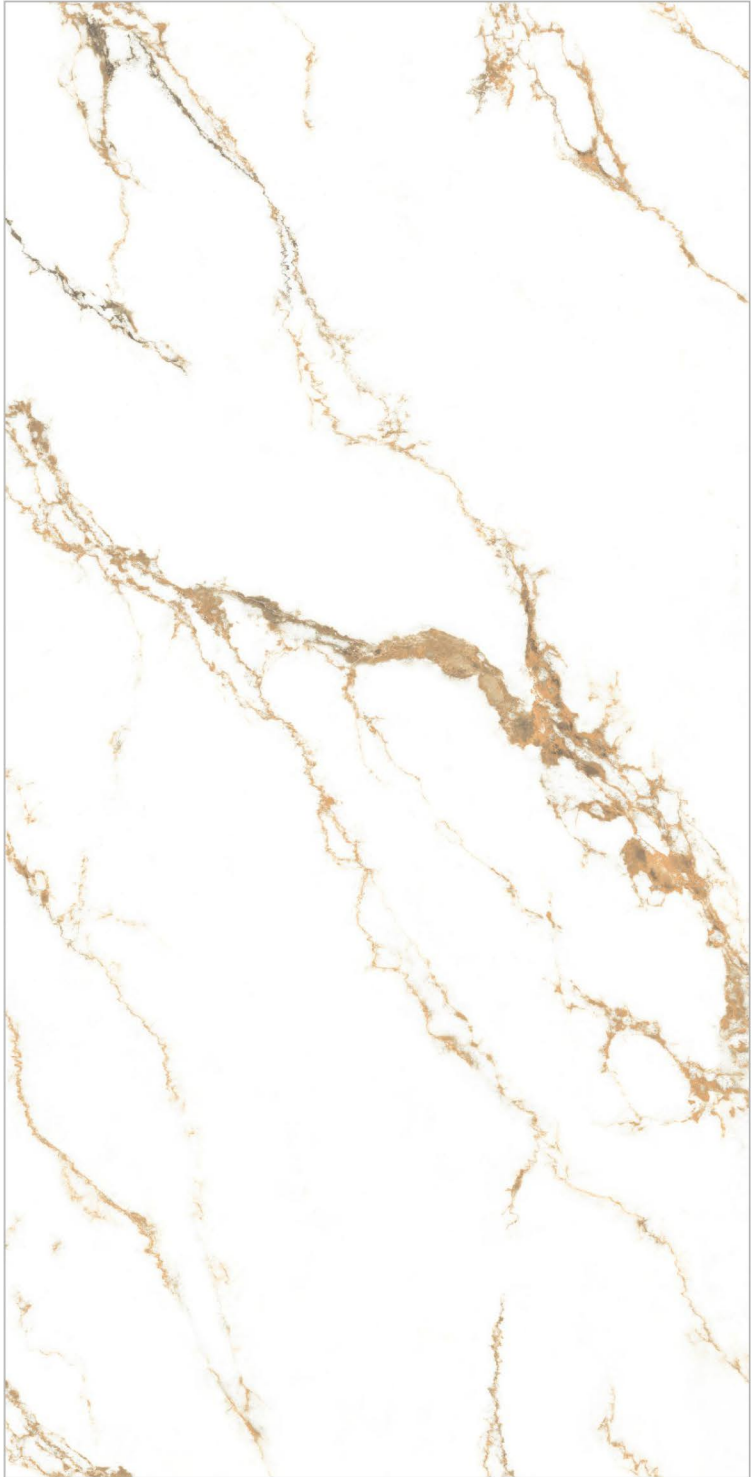





3701

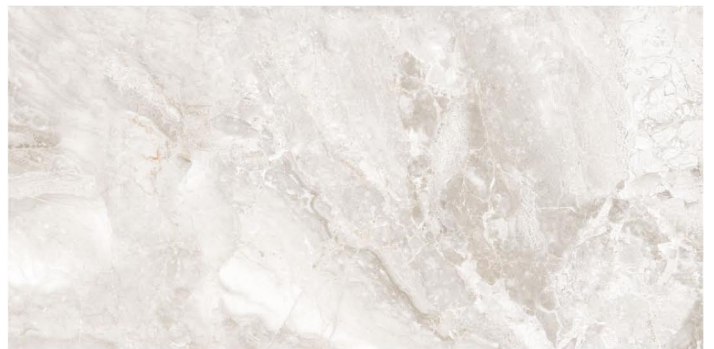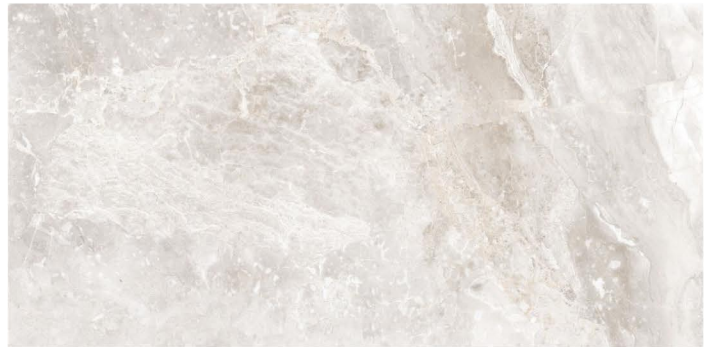


3702

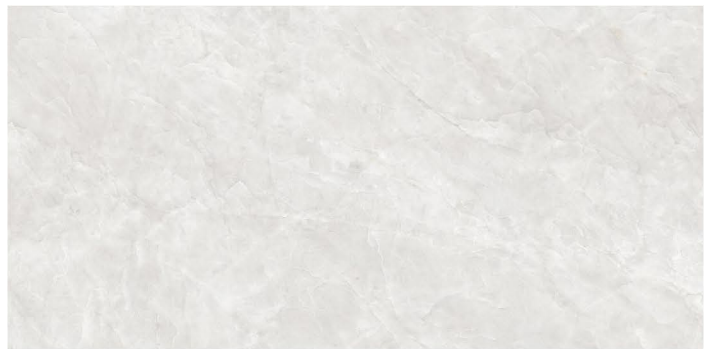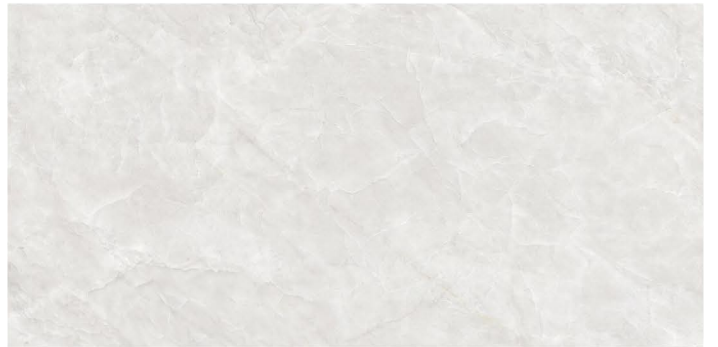


3703

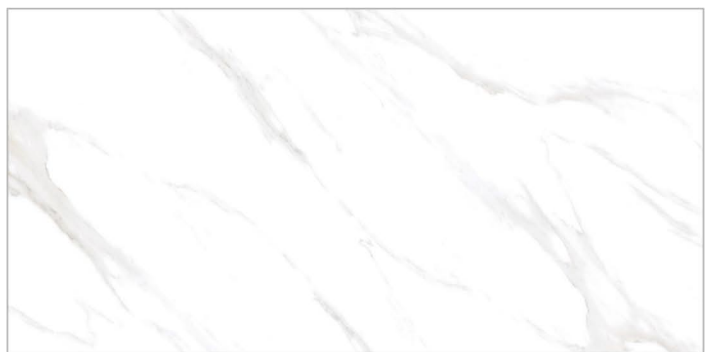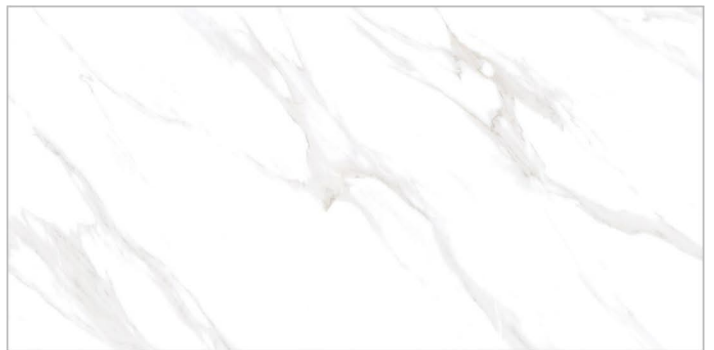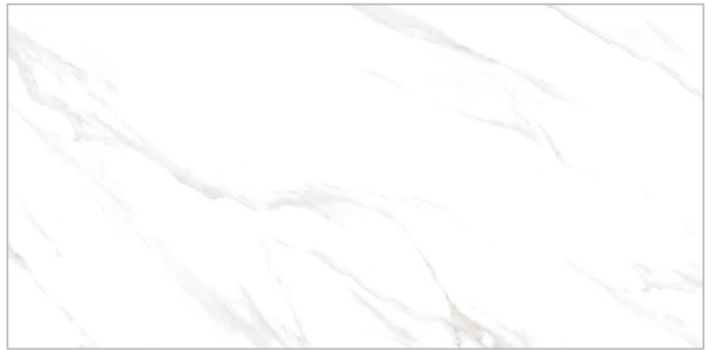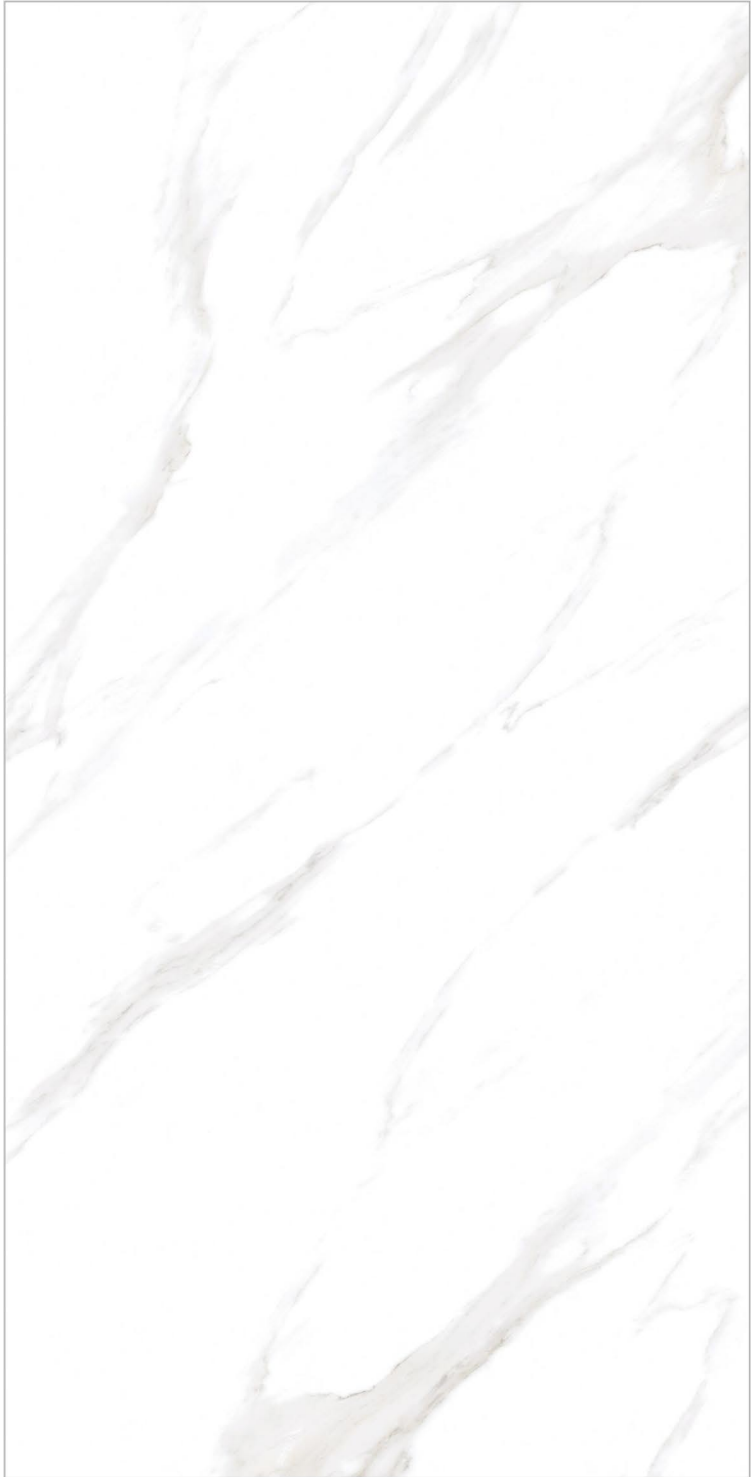

3704

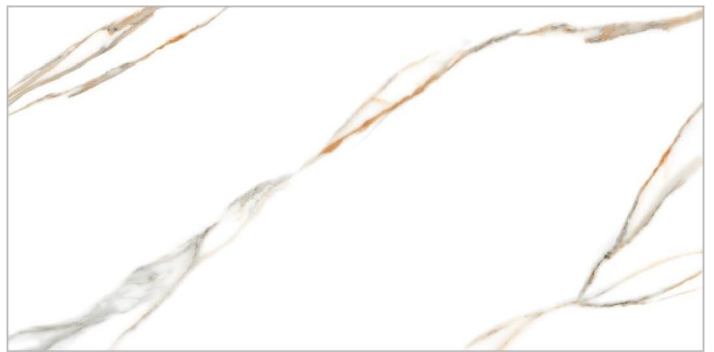

3705

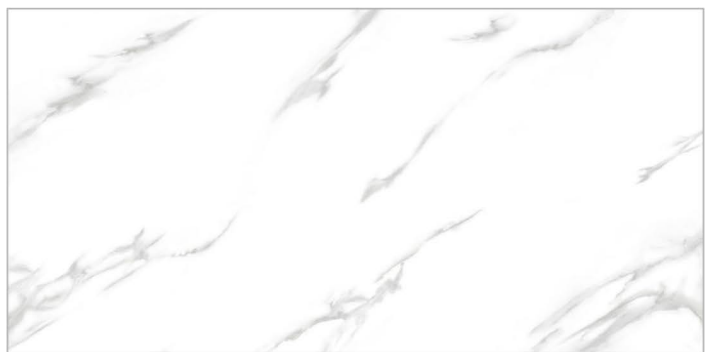



3706





3707




3708

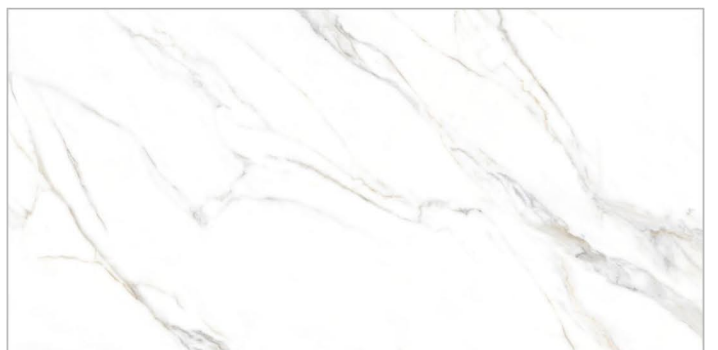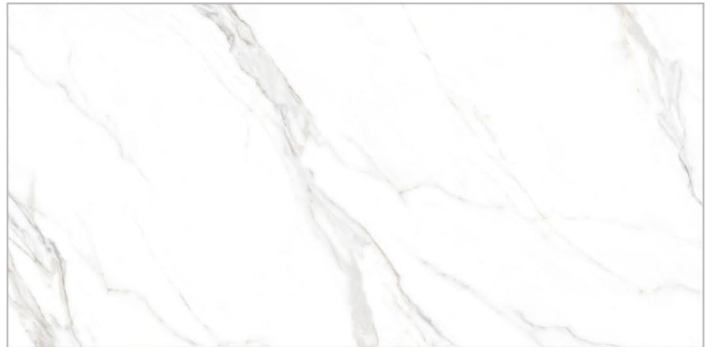

3709

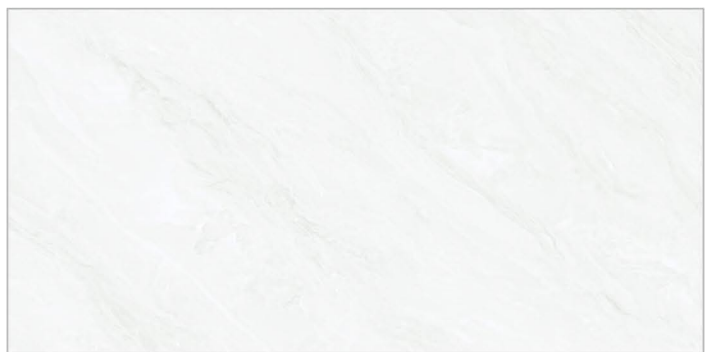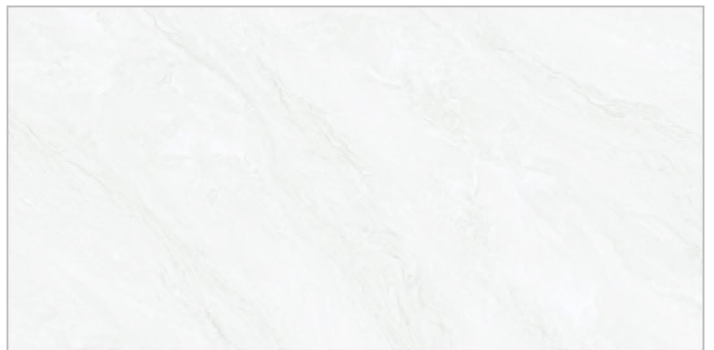

3710

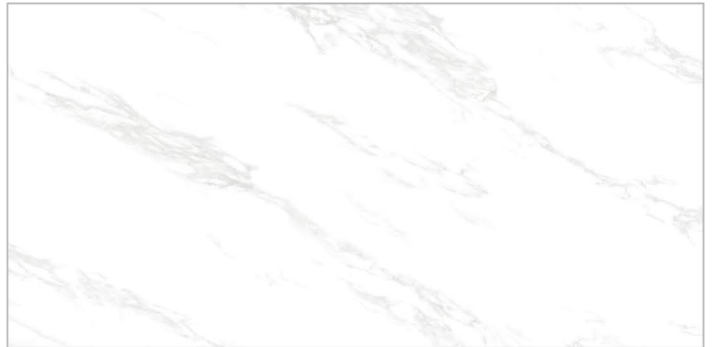

3711



3712




3713





3714




3715

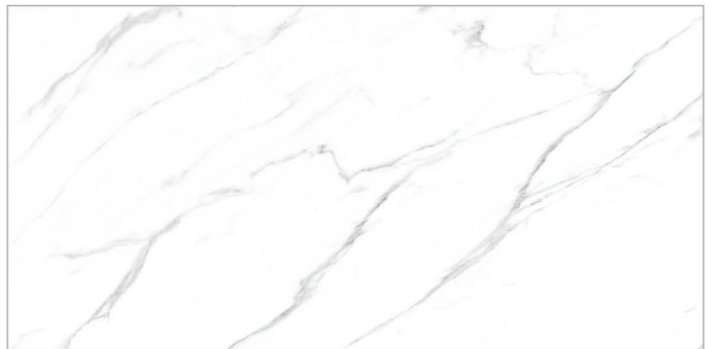


3716

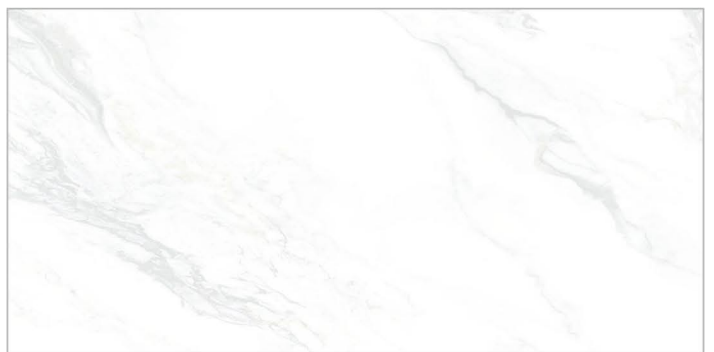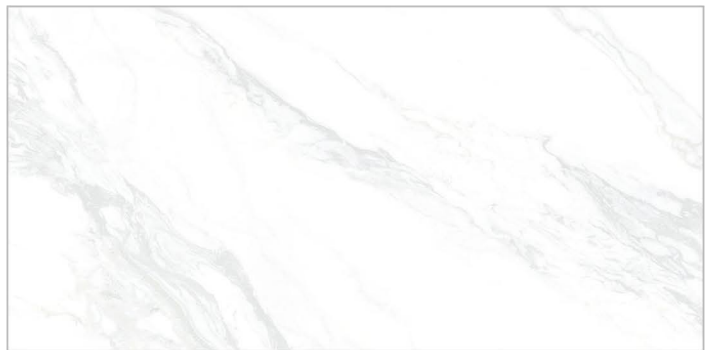



3717

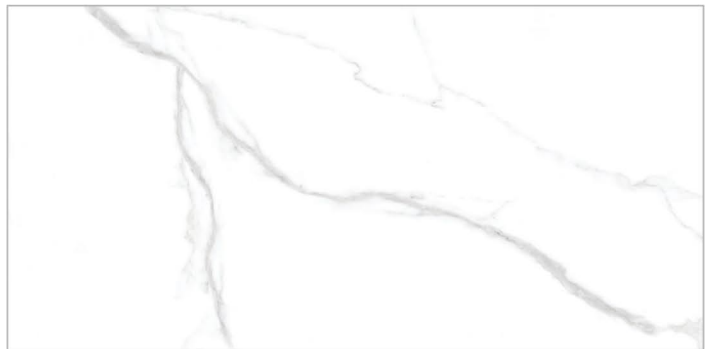



3718

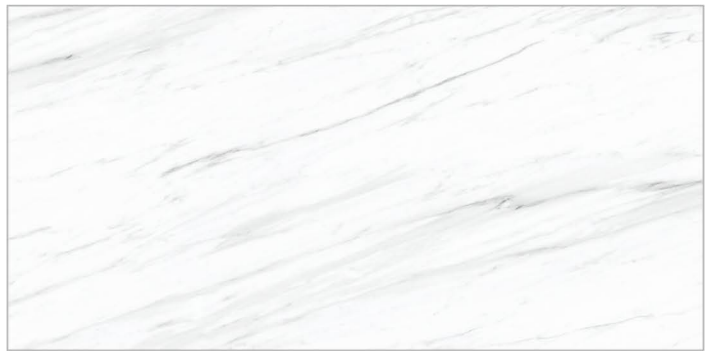

3719

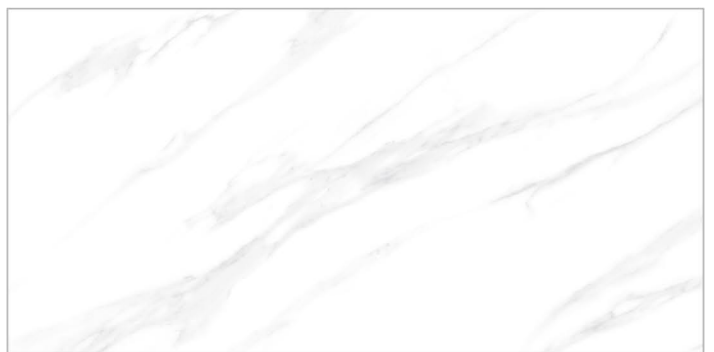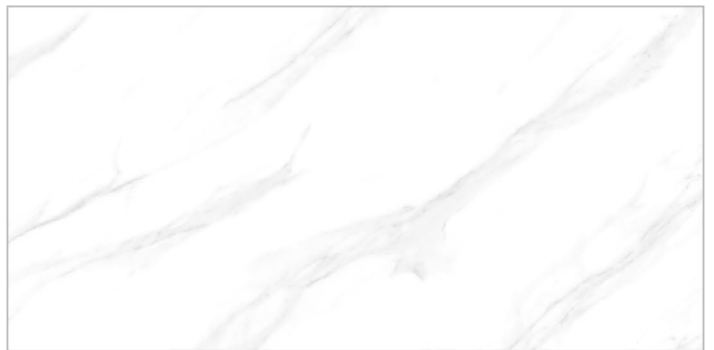

3721

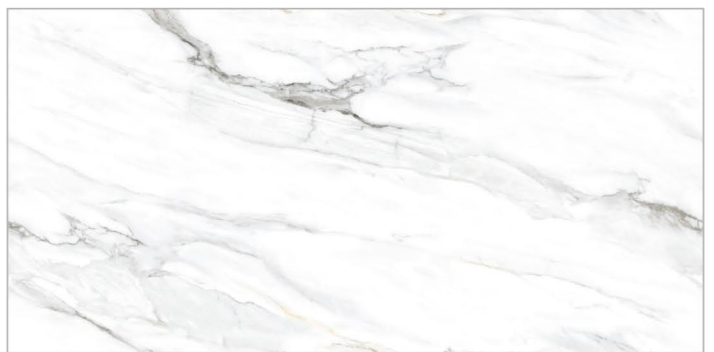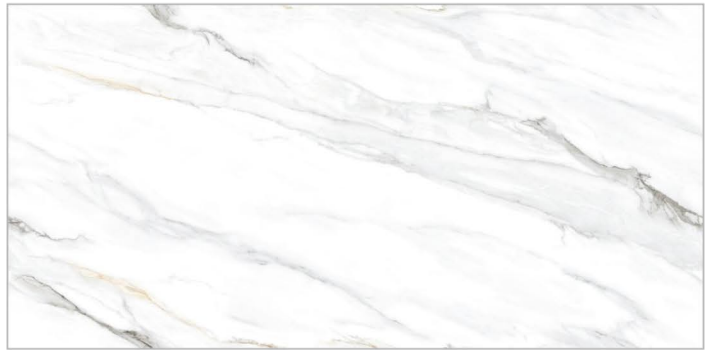




3722





3723




3724

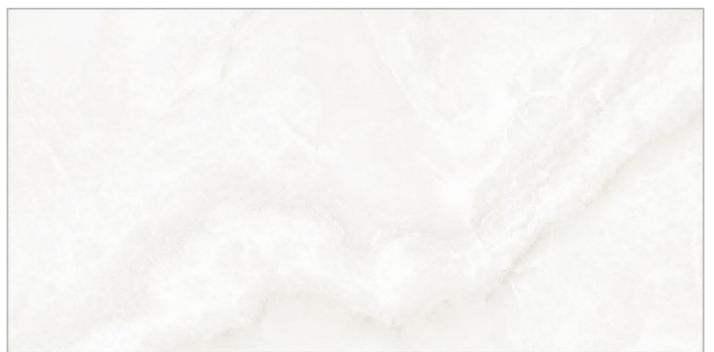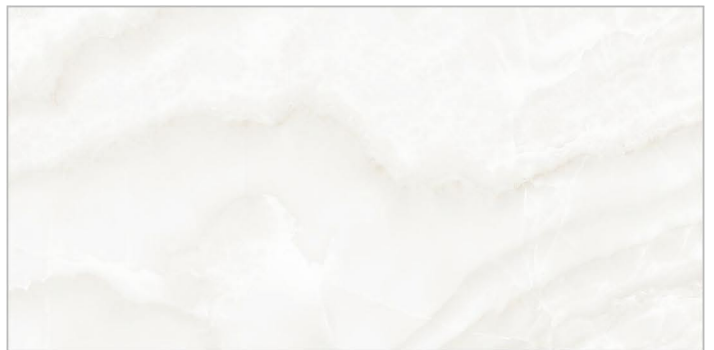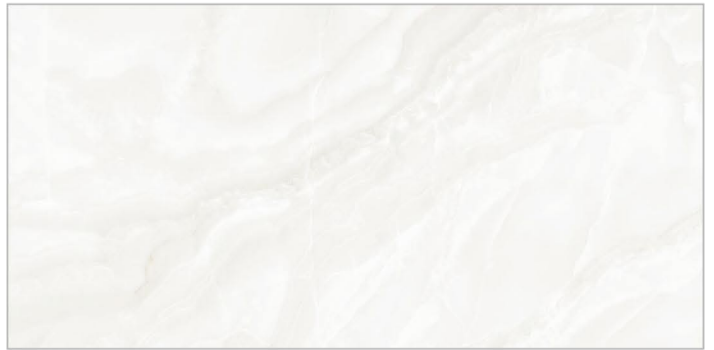

3725

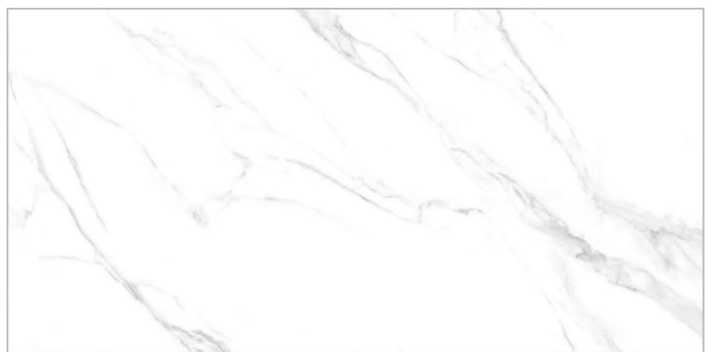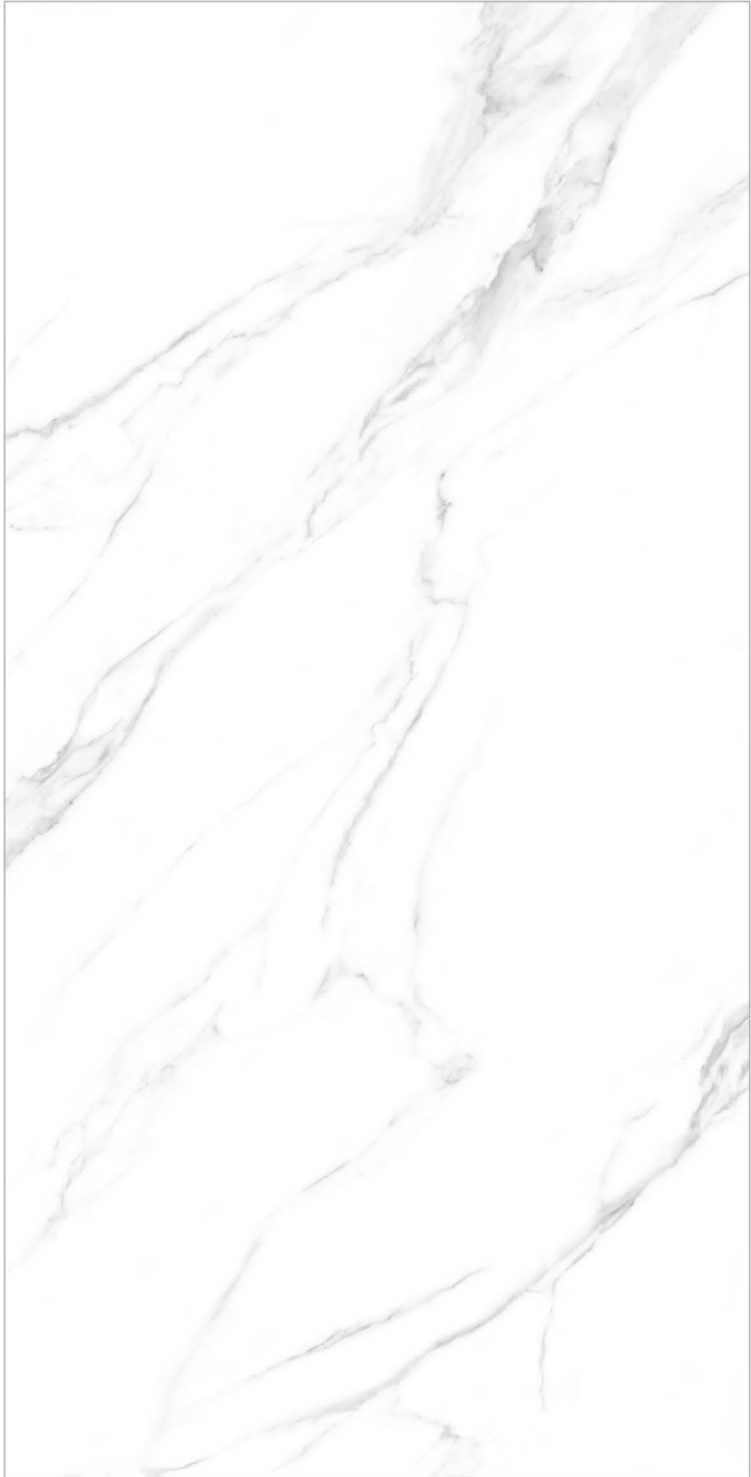


3726

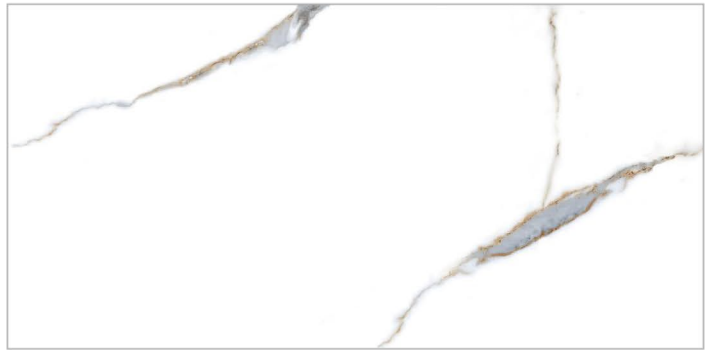




3727





3728

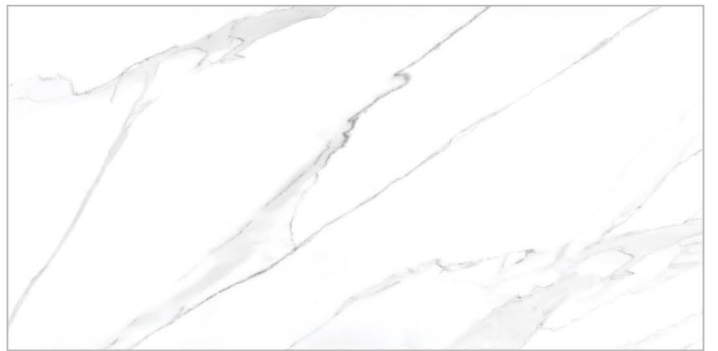

3729

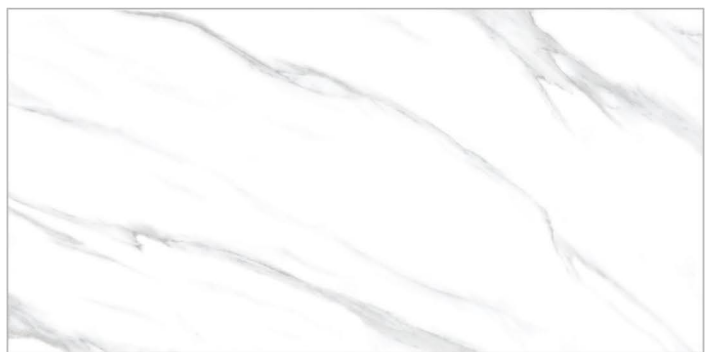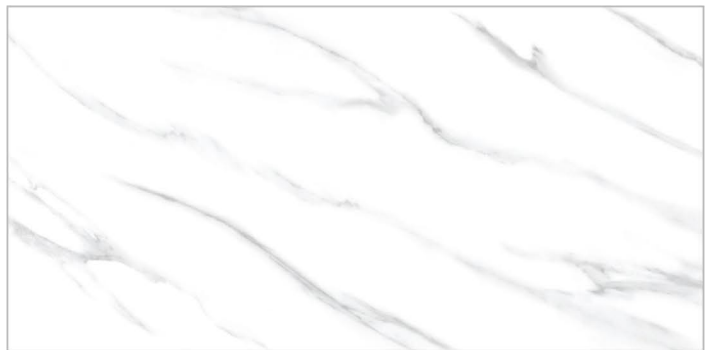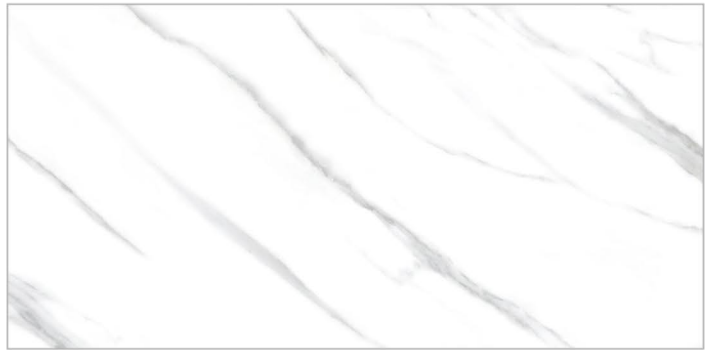


3730

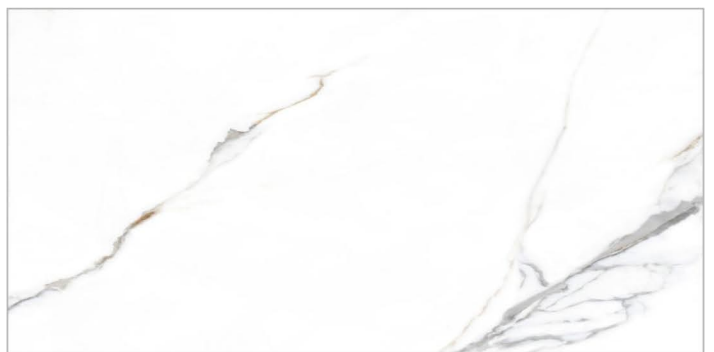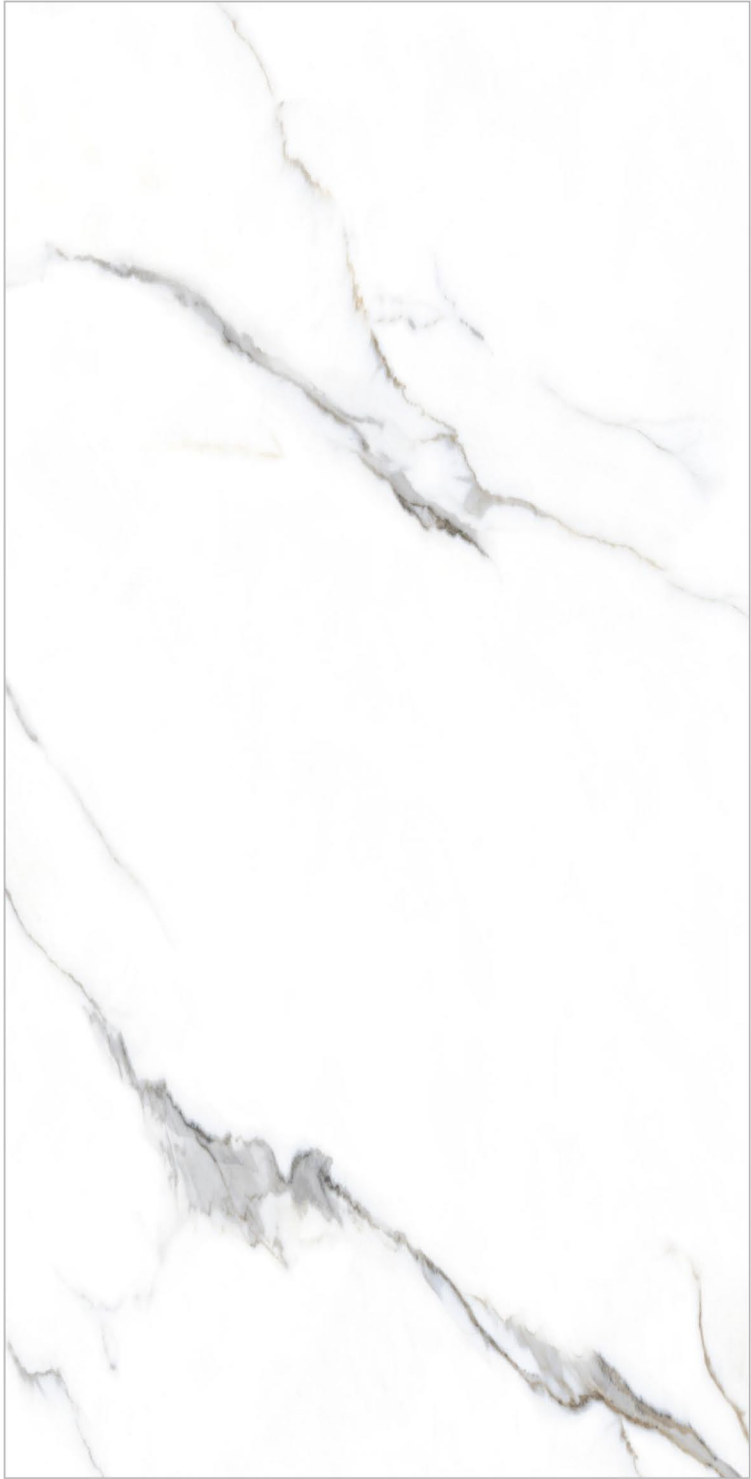




3732




3733

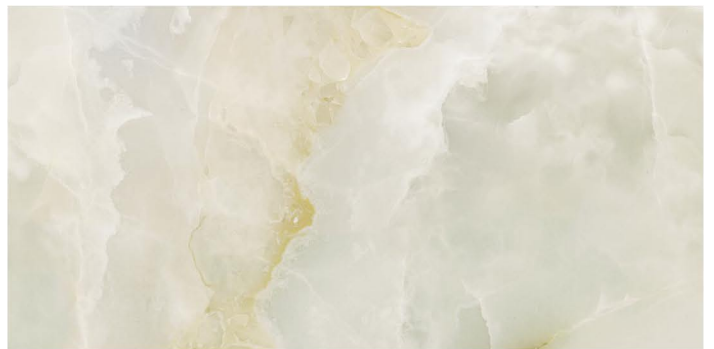

3734

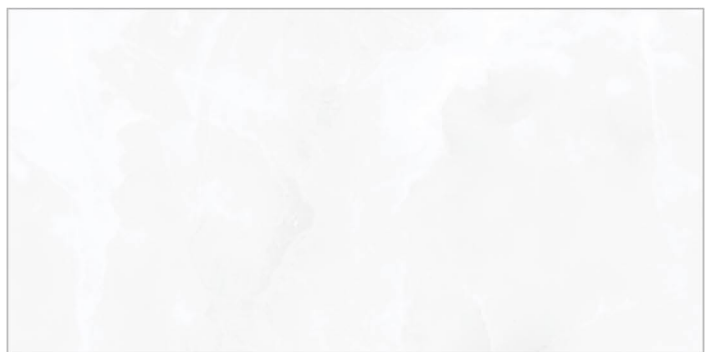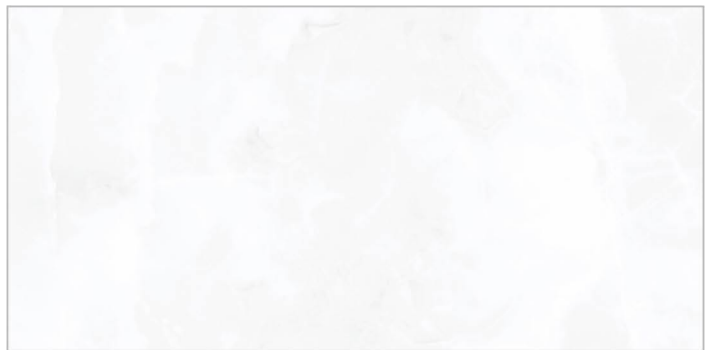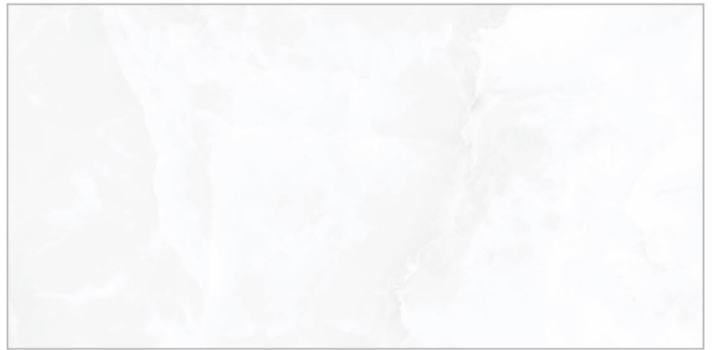


3735

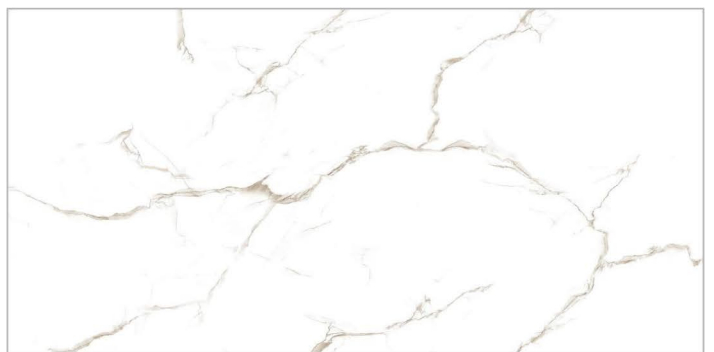

3736




3737

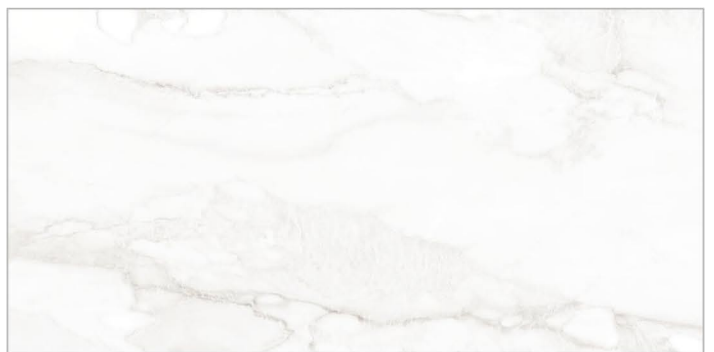

3738



3739

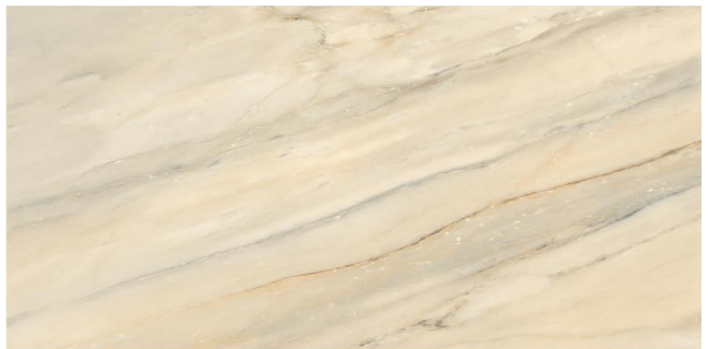

3740

Lwin Tiles Quality Standards

Standards according to **ISO 13006: Annex G - EN 14411: Annex G.** Dry - Pressed Ceramic Tiles. **Group BIa (E_b ≤ 0.5%)**

Technical Feature	Test Method	Requirements		Values	
		%	mm	%	mm

A. Dimensions and Surface Quality

Length and Width	UNI EN ISO 10545-2	± 0.6%	± 2.0	± 0.20%	± 1.0
Thickness		± 5.0%	± 0.5	± 5.00%	± 0.5
Straightness of Sides		± 0.5%	± 1.5	± 0.20%	± 1.0
Rectangularity		± 0.5%	± 2.0	± 0.20%	± 1.2
Surface Flatness a) Centre curvature b) Edge curvature c) Warpage		± 0.5%	± 2.0	± 0.20%	± 1.0
		± 0.5%	± 2.0	± 0.20%	± 1.0
		± 0.5%	± 2.0	± 0.20%	± 1.0
Surface Quality		A minimum of 95% of the tiles shall be free from visible defects that would impair the appearance of a major area of tiles.		Compliant	

B. Physical Properties

Water Absorption	UNI EN ISO 10545-3	E _b ≤ 0.5% Individual maximum : 0.6% (absorbed water mass)	E _b ≤ 0.1% (absorbed water mass)
Breaking Strength	UNI EN ISO 10545-4	Min. 1300 N	≥ 1700 N
Modulus of Rupture		Average minimum 35 N/mm ² Individual minimum 32 N/mm ²	≥ 37 N/mm ²
Frost Resistance	UNI EN ISO 10545-12	Required	Compliant
Coefficient of Linear Thermal Expansion From Ambient Temperature to 100°C	UNI EN ISO 10545-8	Required	6 x 10 ⁻⁶ K ⁻¹ max
Scratch Hardness (Mohs scale)	EN 101	Declared by the producer	3 to 6 Depends on Finish & Color
Crazing Resistance	UNI EN ISO 10545-11	Declared by the producer	4 Cycle Pass

C. Chemical Properties

Resistance to Staining	UNI EN ISO 10545-14	Minimum Class 3	5
Resistance to Household Chemicals and Swimming Pool Salts	UNI EN ISO 10545-13	Minimum GB	GA
Resistance to Low Concentrations of Acids and Alkalies		To be reported	GLA
Resistance to High Concentrations of Acids and Alkalies		To be reported	GHA

Note: Colours shown are as accurate as the limitations of the printing results on paper are possible. Prospective customers are advised to inspect a sample of the tile before placing the order. Every effort has been taken to ensure the accuracy of the information given. However, the company reserves its right to change/alter the specifications without any prior notice. Sometime shade variation or size variation may occur, as this is inherent property of ceramic tile industry. Before fixing the tiles, all are advised to follow the laying instructions printed on the corrugated box of the tile. Company does not take/carry any responsibility of what so ever nature, once tiles are laid.



Office

Om Decora 9 Square, 150 Feet Ring Road,
Nana Muva, Rajkot Gujarat 360003 - INDIA

Factory

Jivapar Jetpar Road,
Near Levita Granito LLP Morbi Gujarat 363630 - INDIA
www.L-wintiles.com
Info@L-wintiles.com