


Lwin
TILES

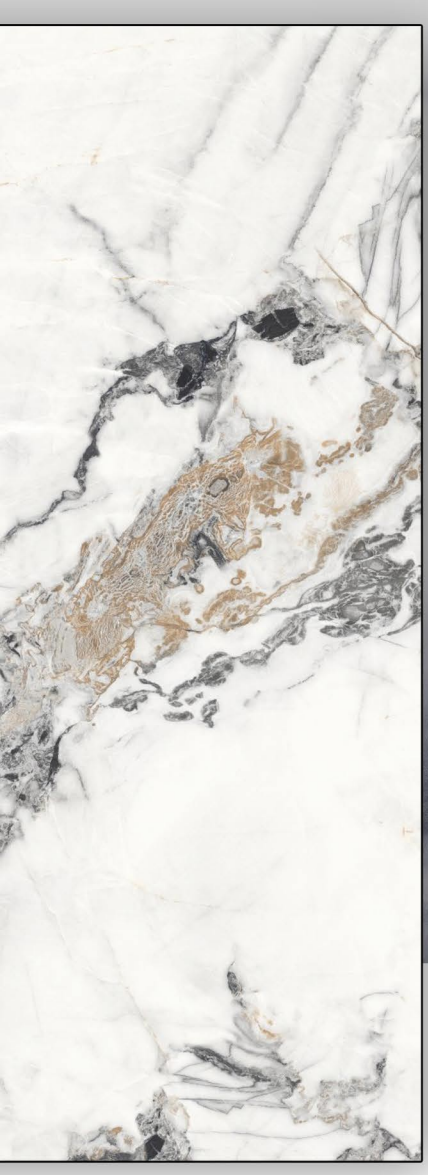

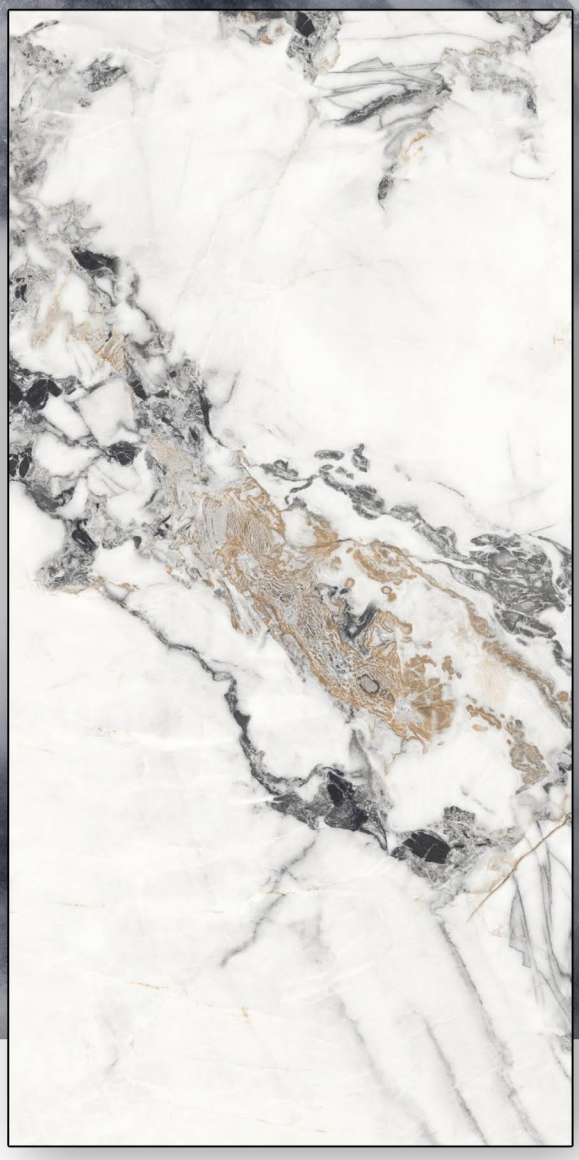


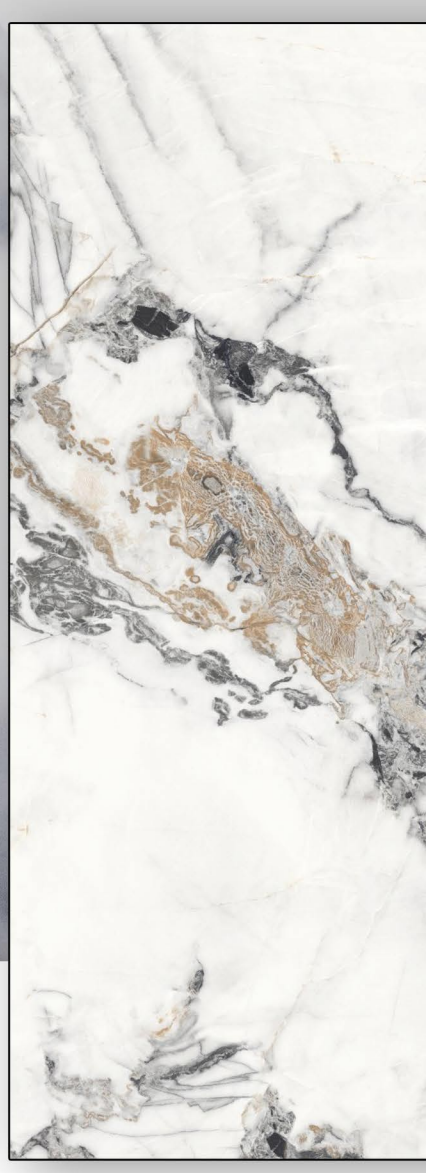

Glossy

Series

Available
Sizes

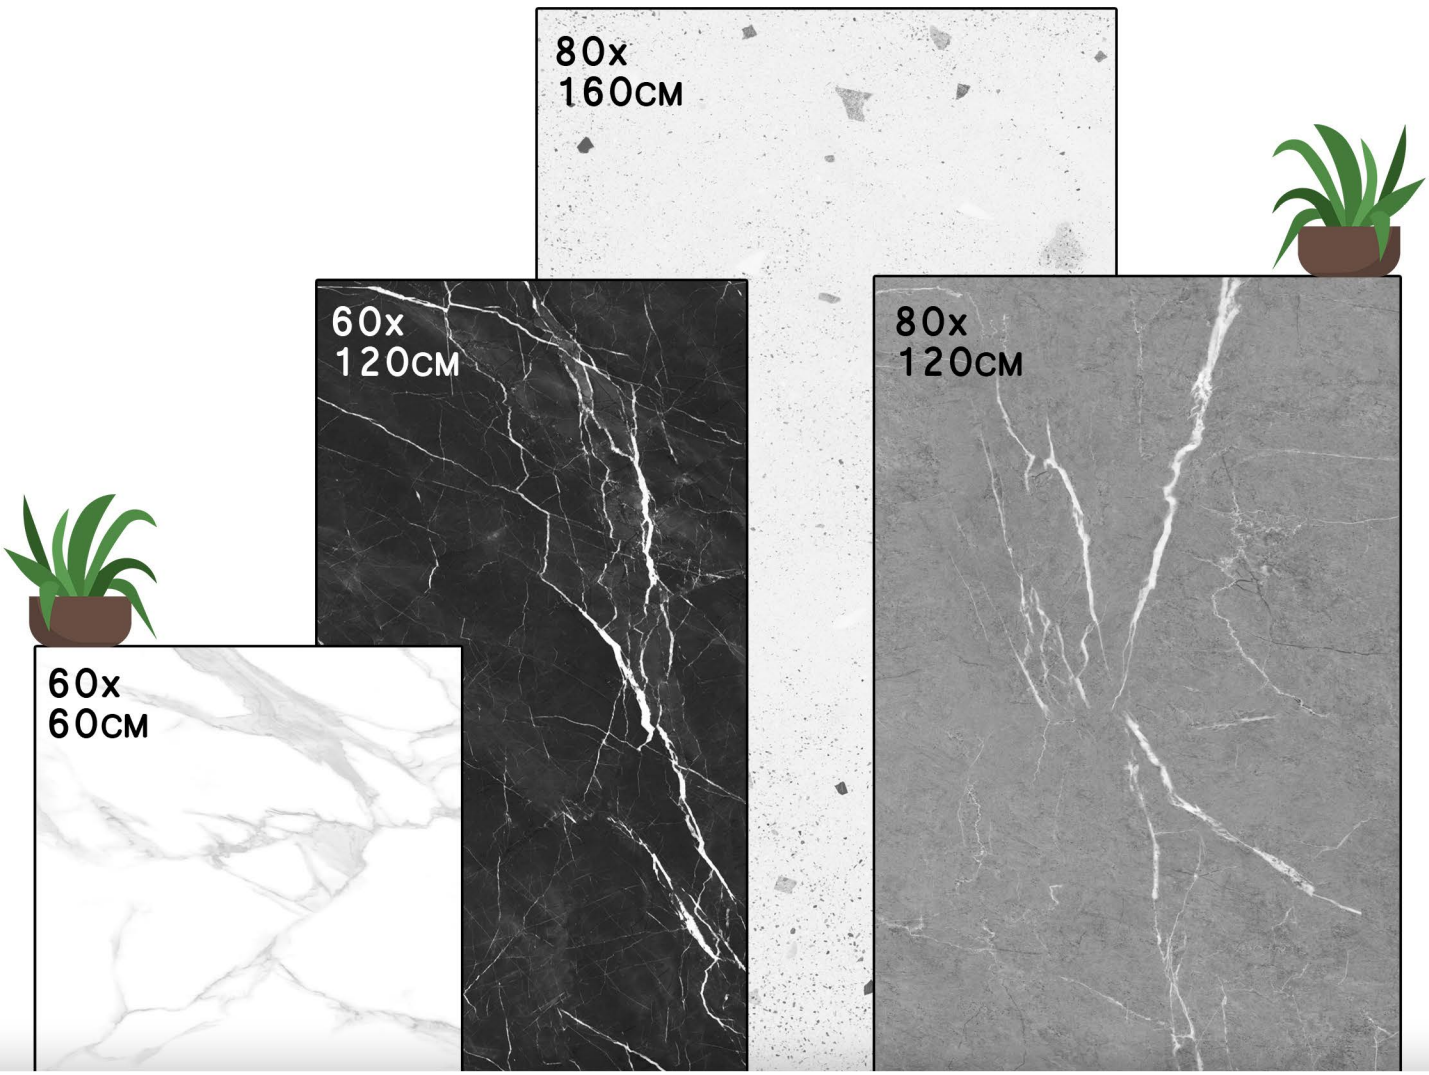

Dimensional
Stability

Acid
Resistance

Stain
Resistance

High
Durable


Home
Applicable

Factory
Applicable

Supermart
Applicable

Hotel
Applicable

About
Us

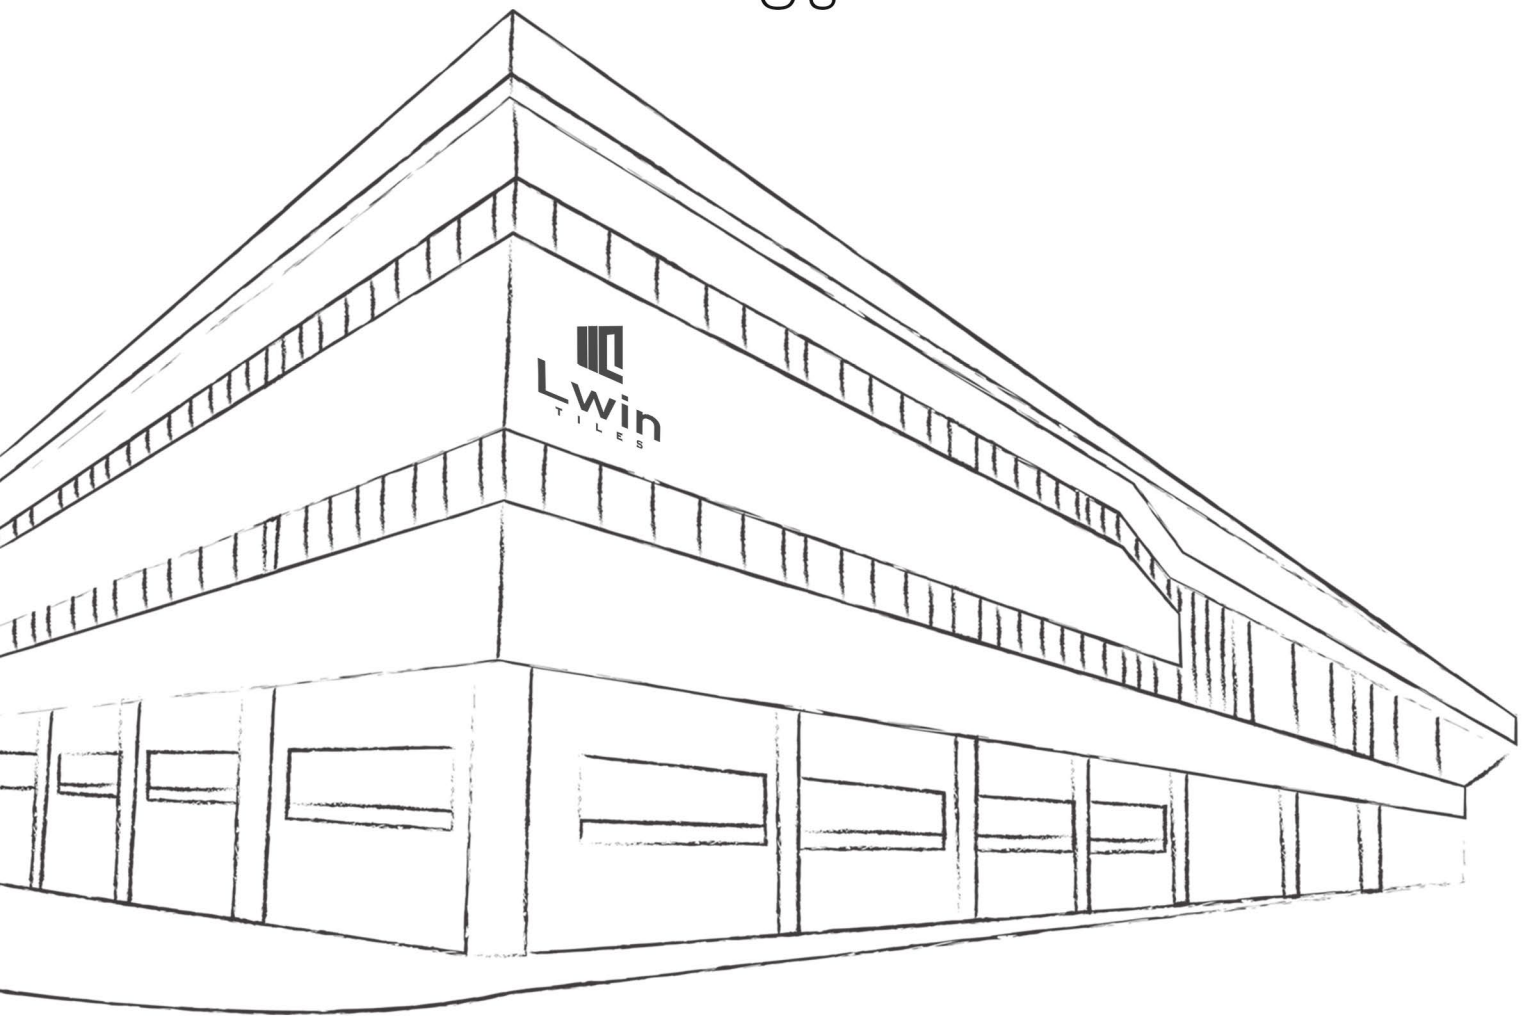

Our **Units** are well equipped with the best technology that allowing us to produce high-quality tiles with a cosistently impeccable finish.

Our excellent **Team** closely moniter every phase of the process. They put greatest effort to deliver on our commitments so that we can creat value for our customers.

Our different and wide range of **Design** collections which consist of technical properties.

Lwin
TILES









3427

Lwin
TILES










3428

Lwin
TILES







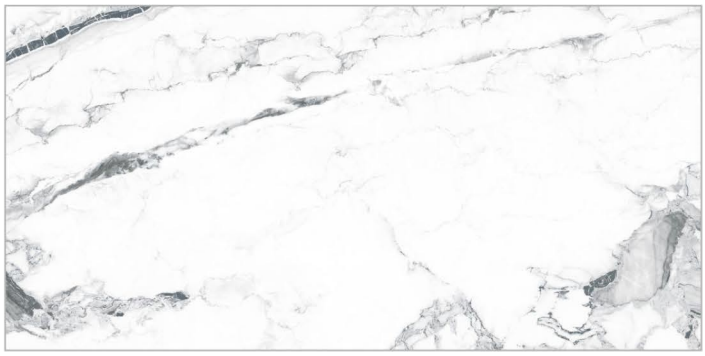


3429

Lwin
TILES







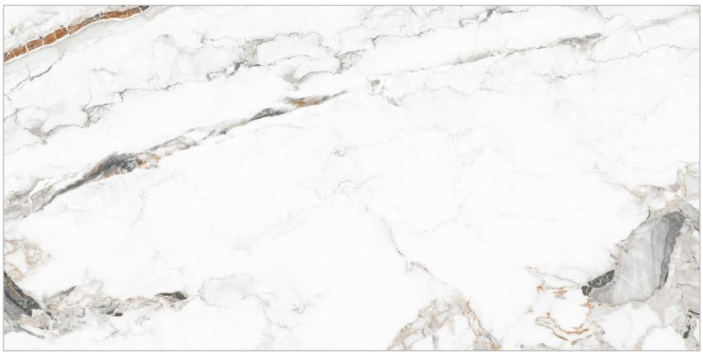

3430

Lwin
TILES










3431

Lwin
TILES

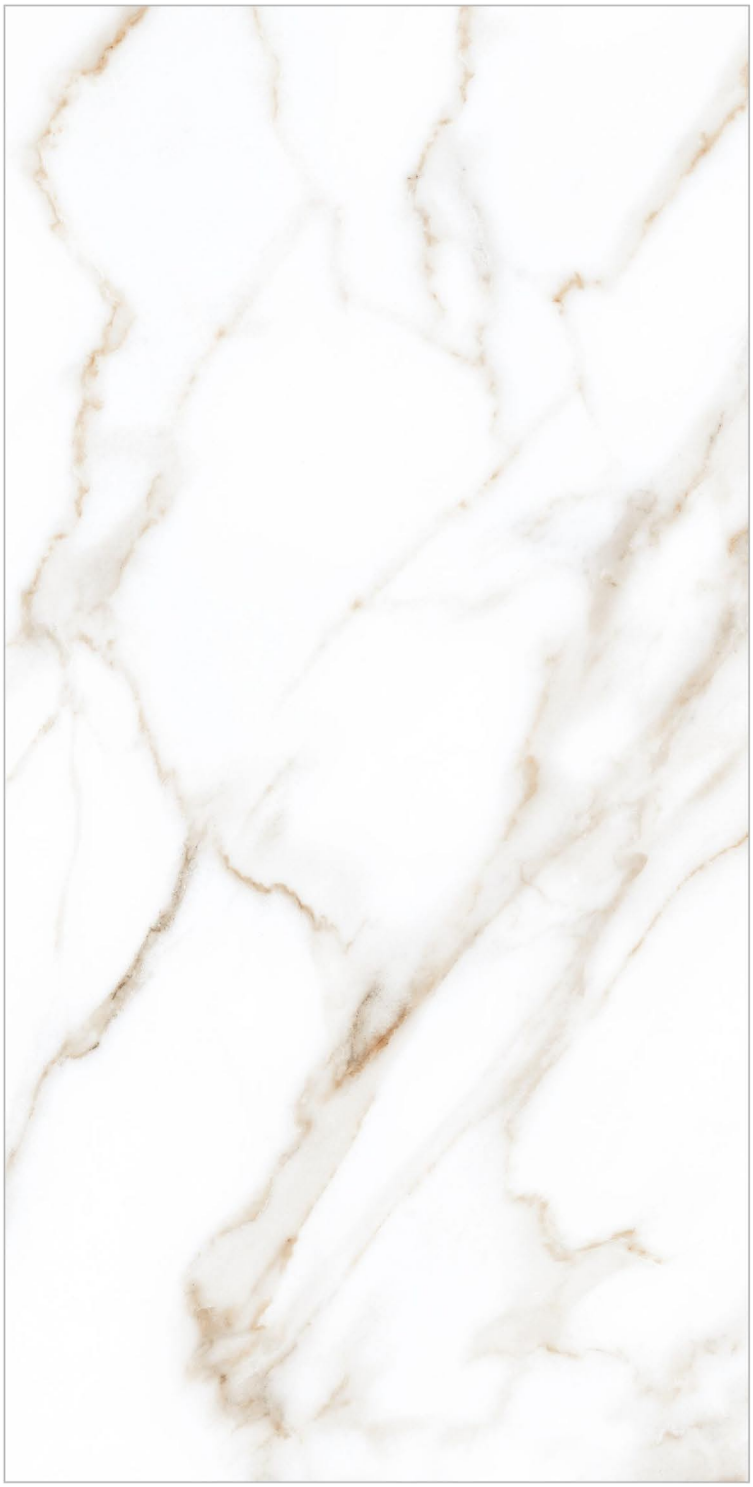







3432

Lwin
TILES











3433

Lwin
TILES

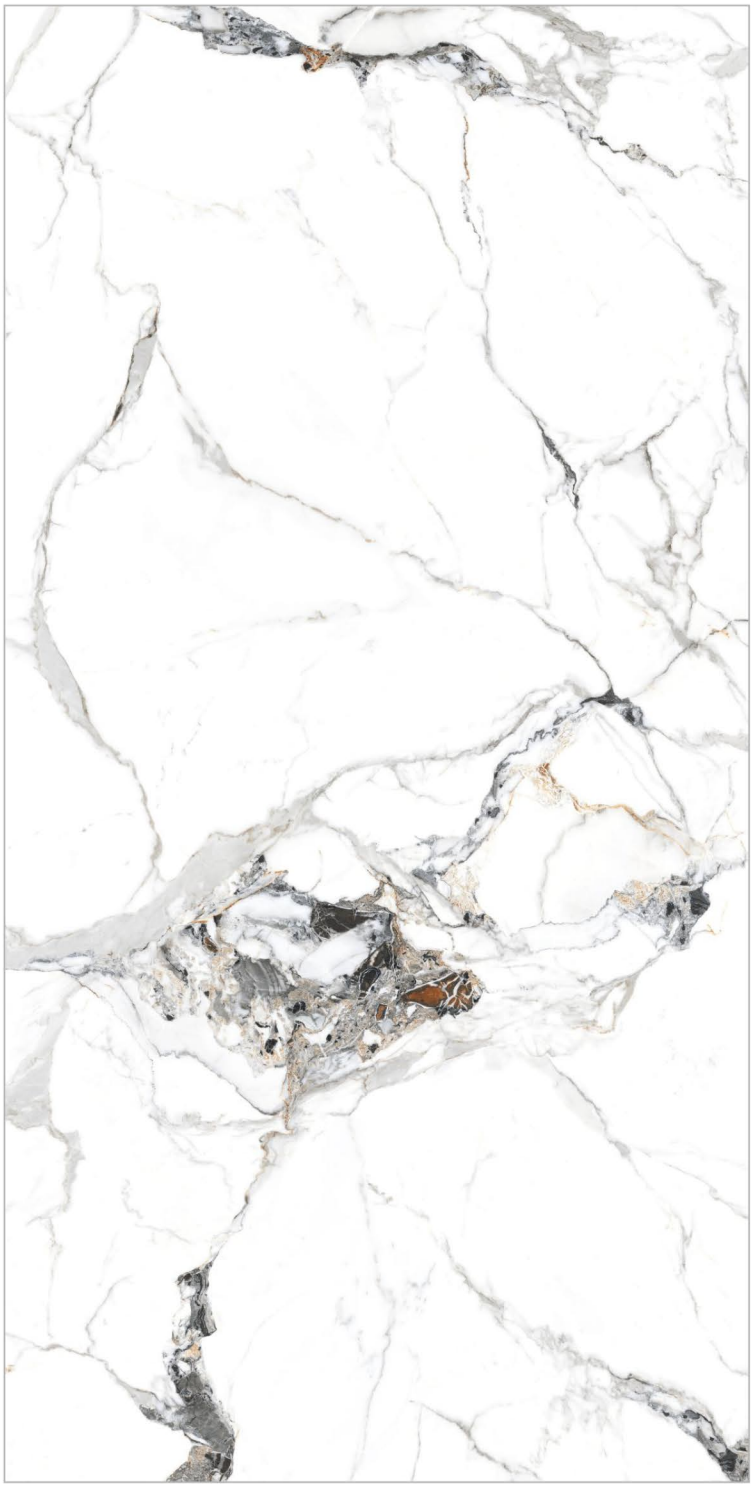






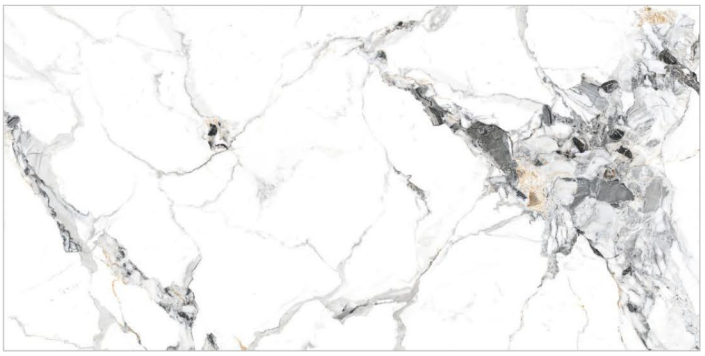

3434

Lwin
TILES



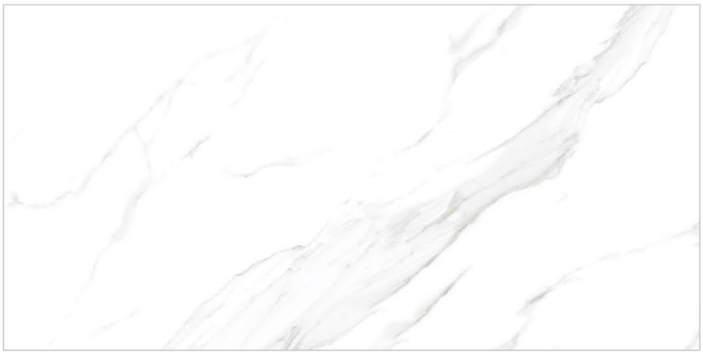






3435

Lwin
TILES








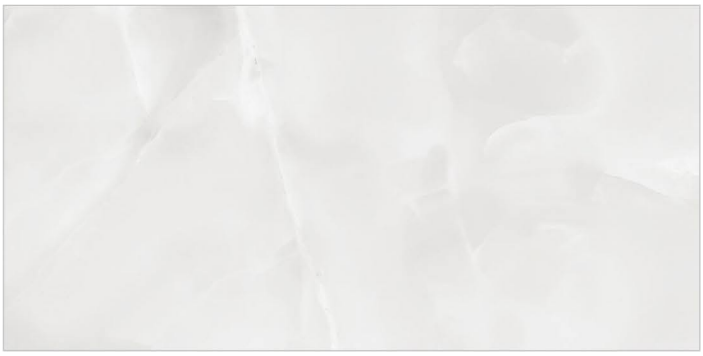

3436

Lwin
TILES

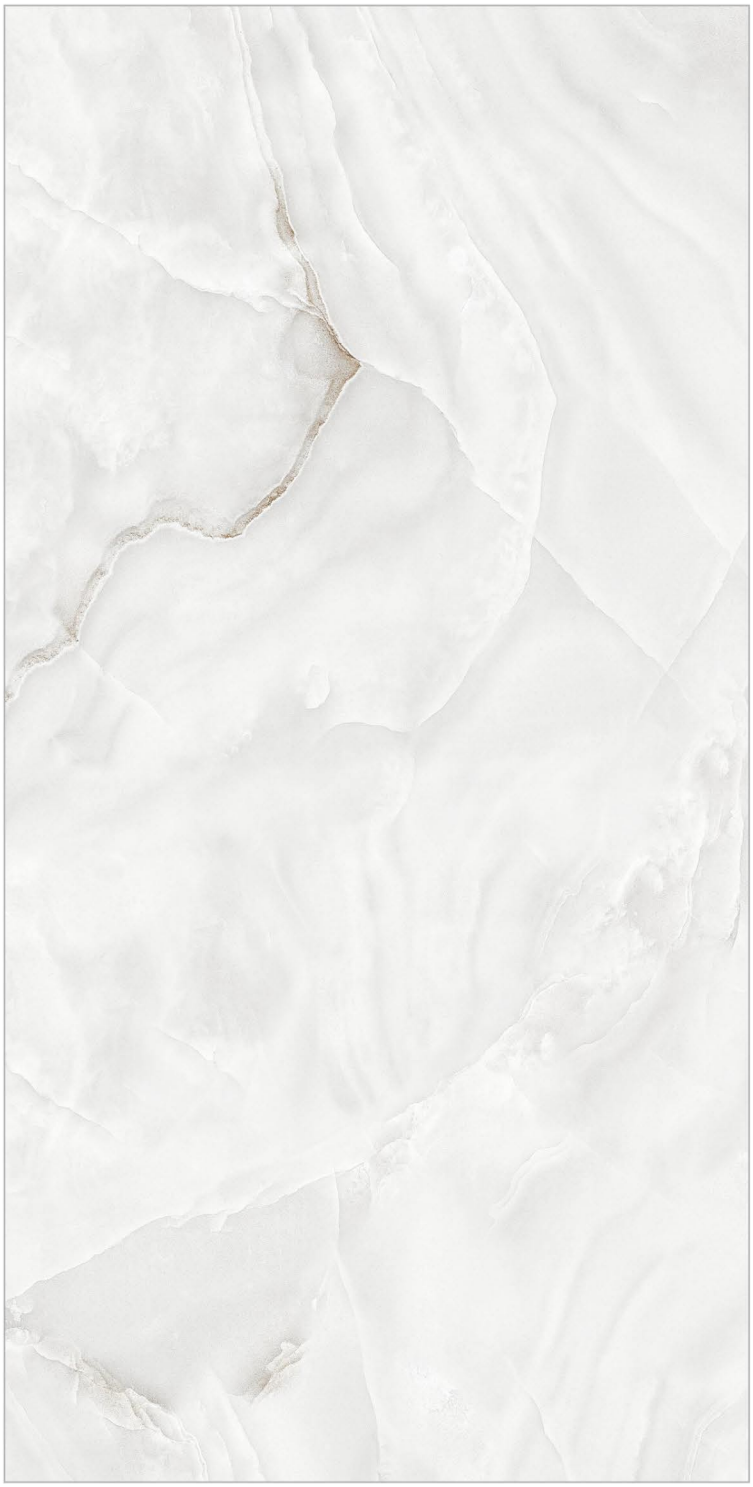







3437

Lwin
TILES









3438

Lwin
TILES










3439

Lwin
TILES





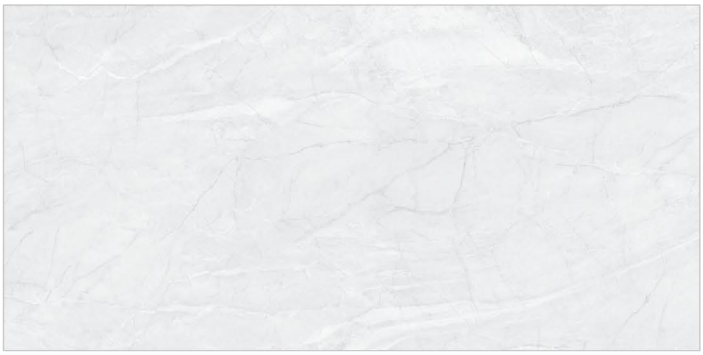




3440

Lwin
TILES







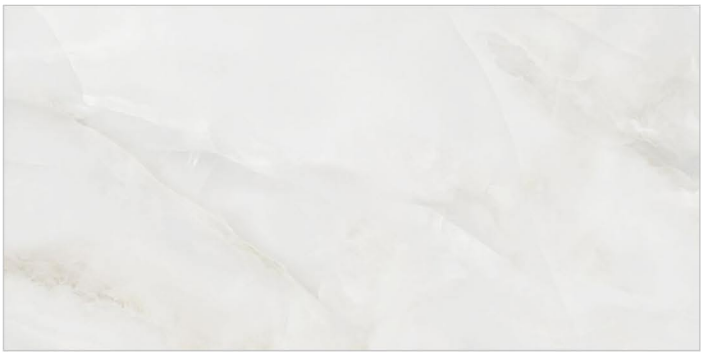



3441

Lwin
TILES





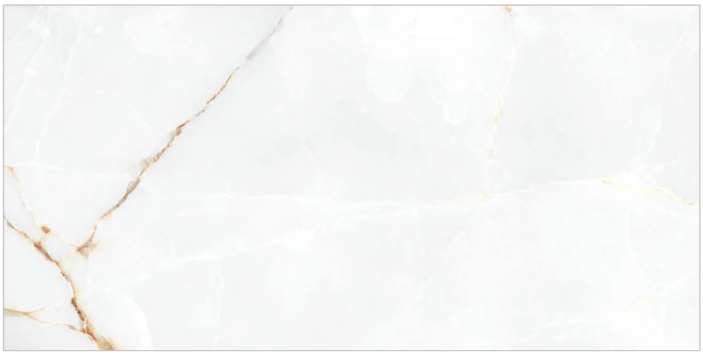

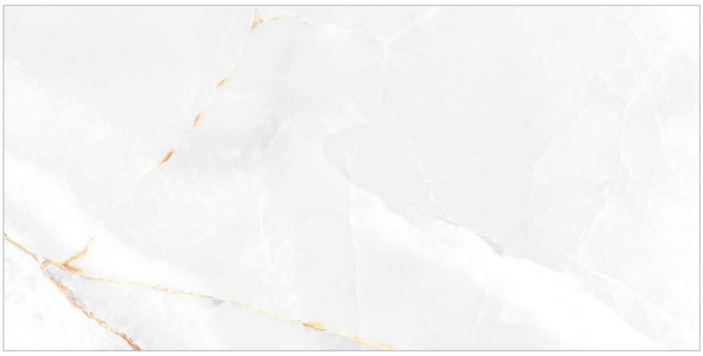

3442

Lwin
TILES











3443

Lwin
TILES



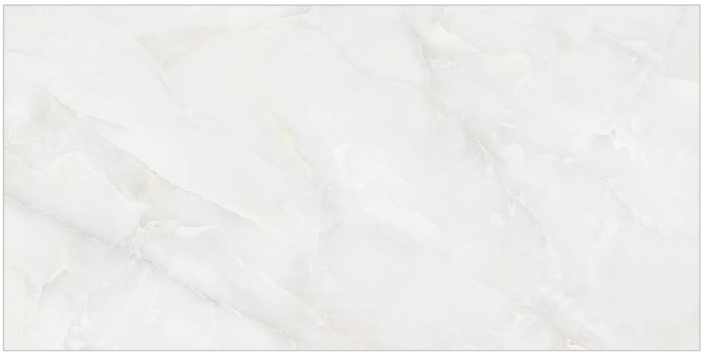

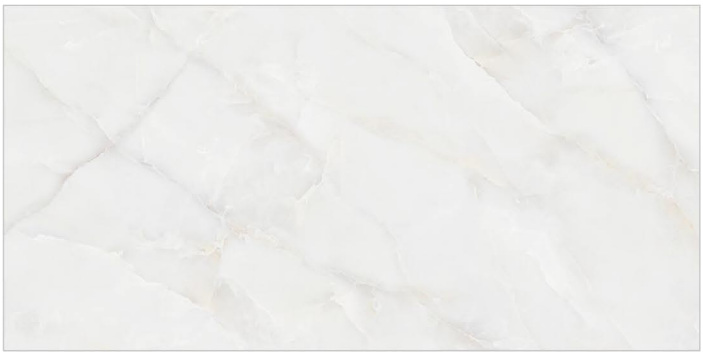

3444

Lwin
TILES







3445

Lwin
TILES










3446

Lwin
TILES





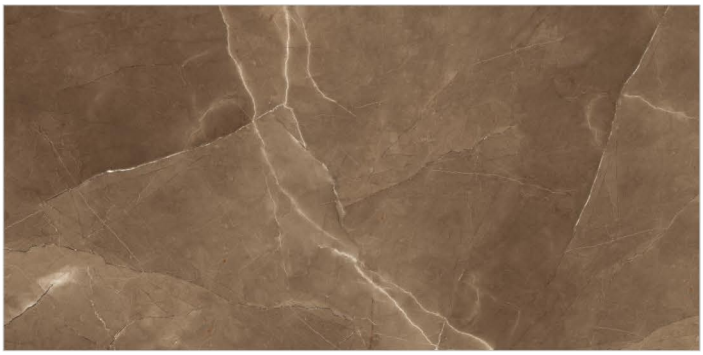




3447

Lwin
TILES







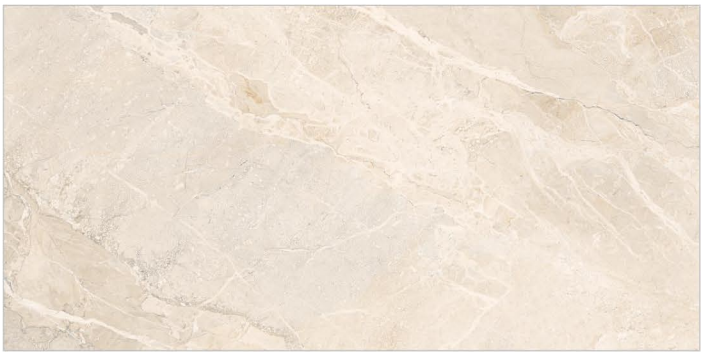

3448

Lwin
TILES









3449

Lwin
TILES









3450

Lwin
TILES









3451

Lwin
TILES









3452

Lwin
TILES












3453

Lwin
TILES



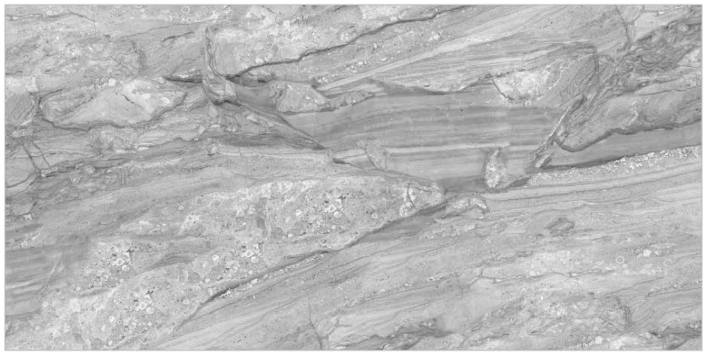

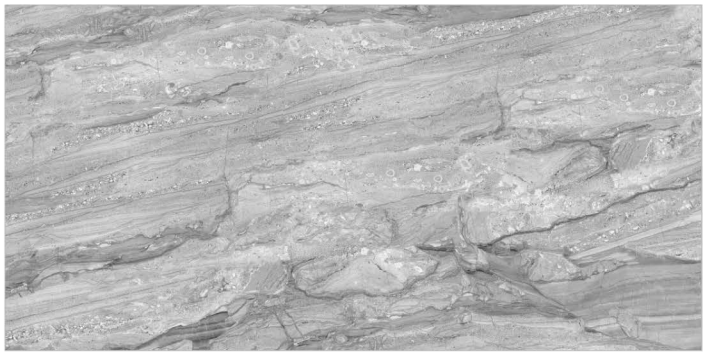

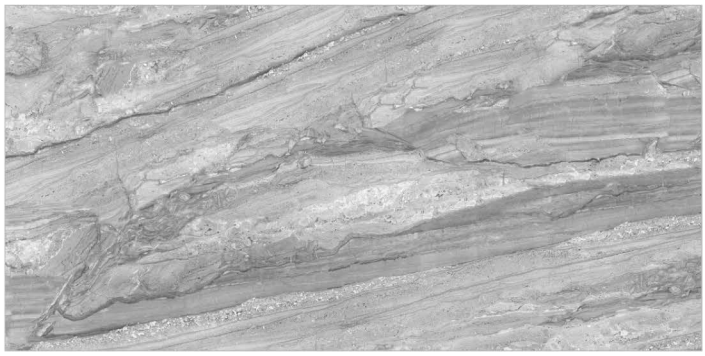

3454

Lwin
TILES











3455

Lwin
TILES

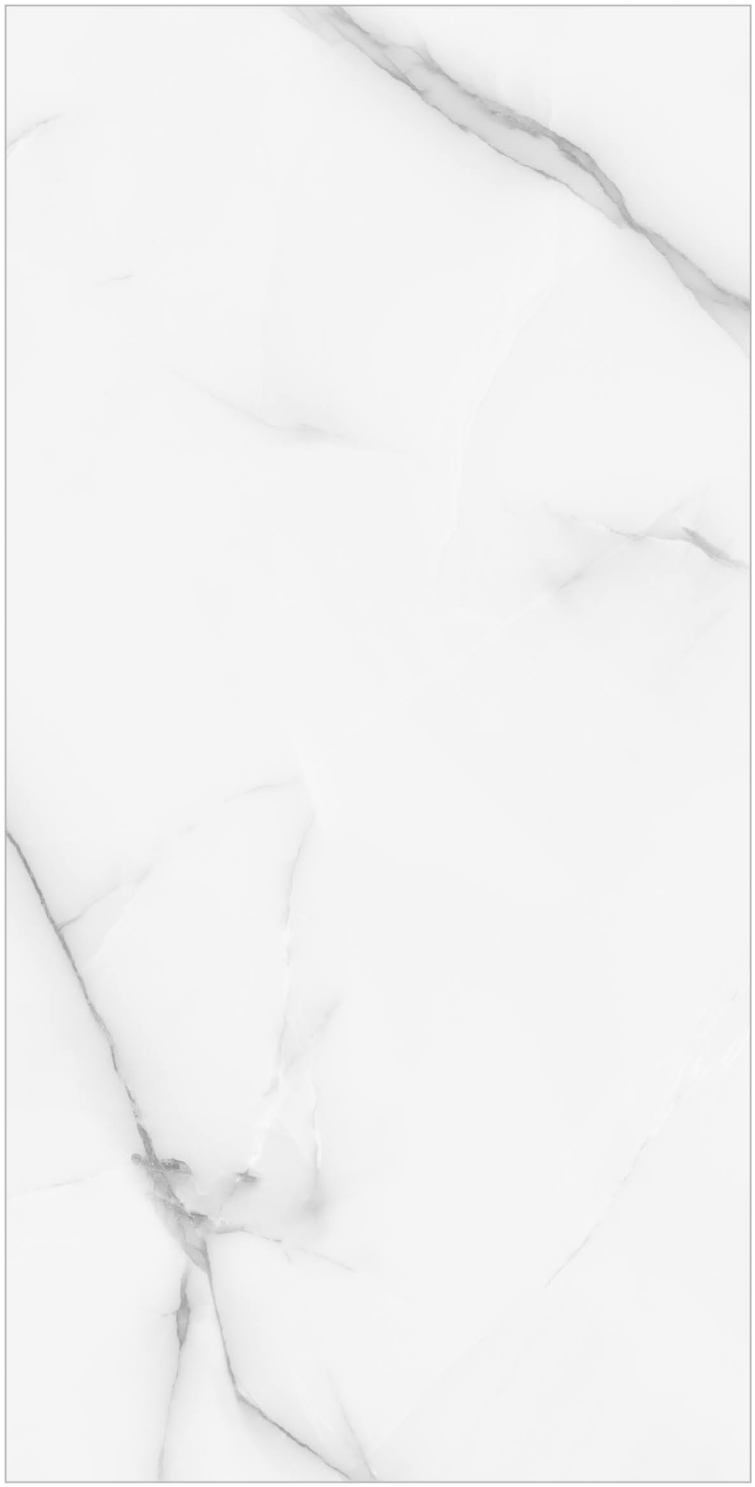




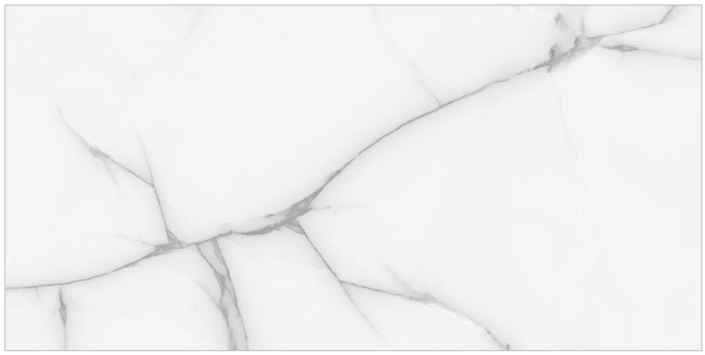



3456

Lwin
TILES

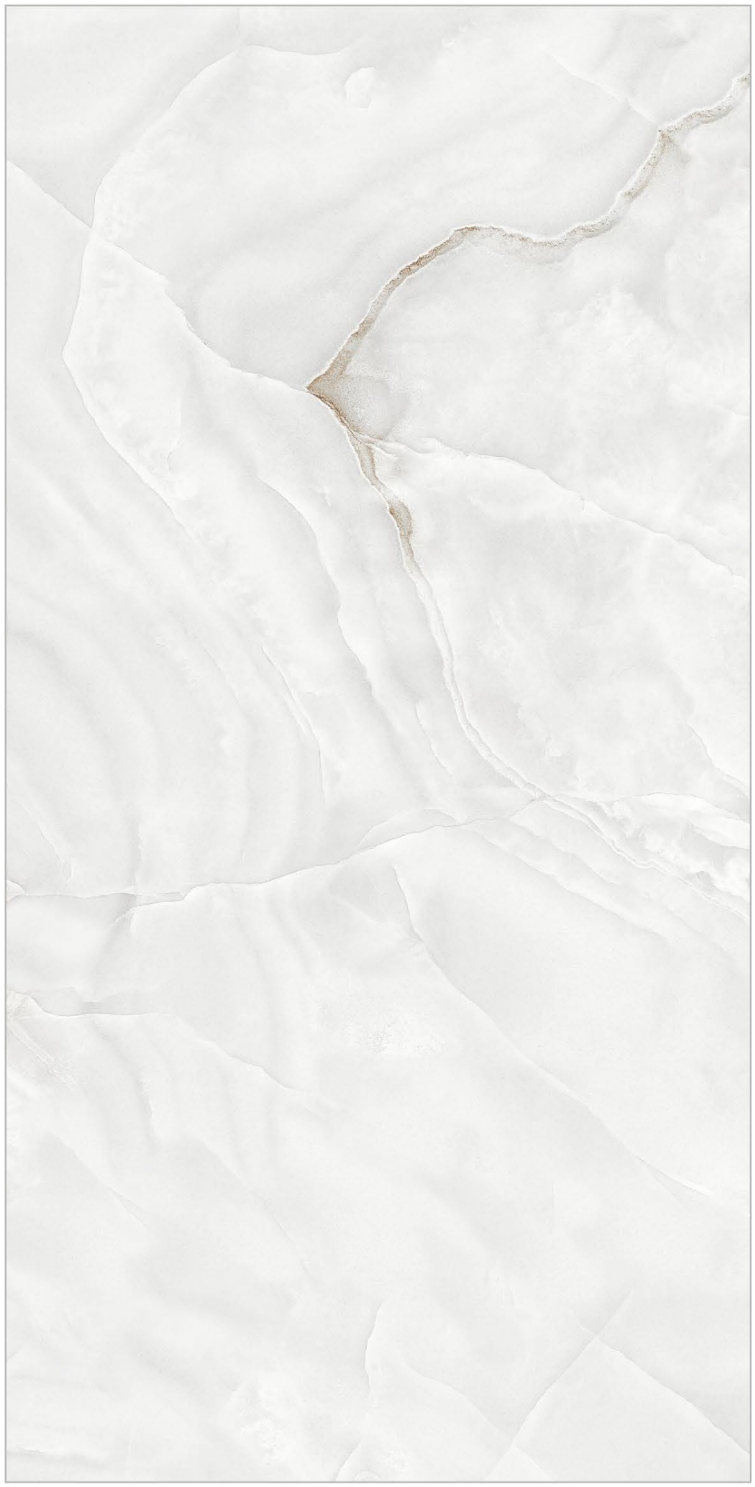







3457

Lwin
TILES









3458

Lwin
TILES









3459

Lwin
TILES









3460

Lwin
TILES







3461

Lwin
TILES







3462

Lwin
TILES








3463

Lwin
TILES

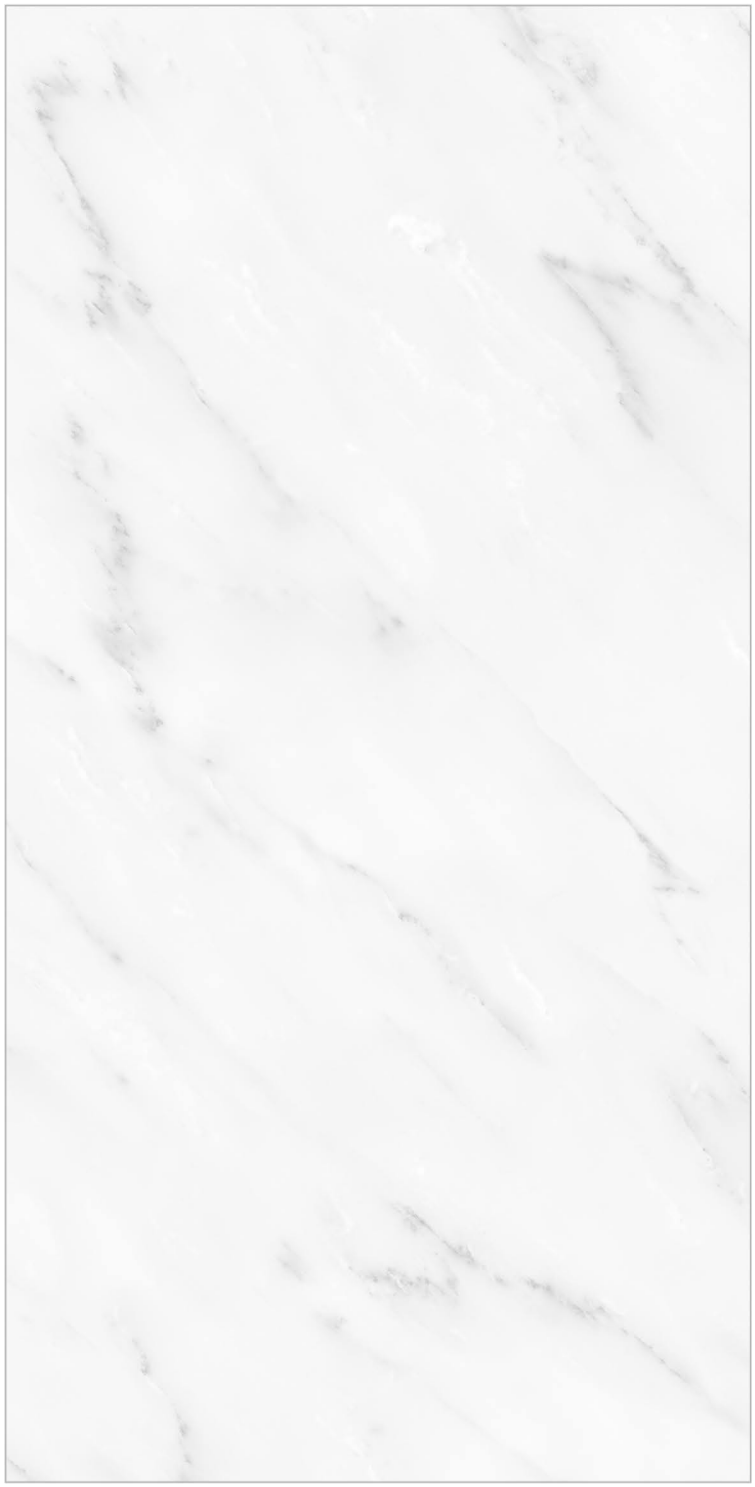






3464

Lwin
TILES




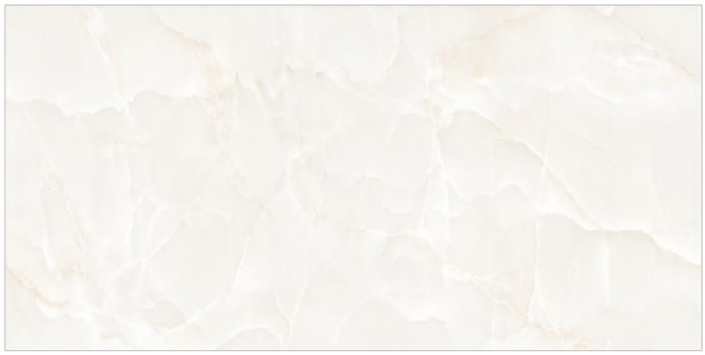

3465

Lwin
TILES



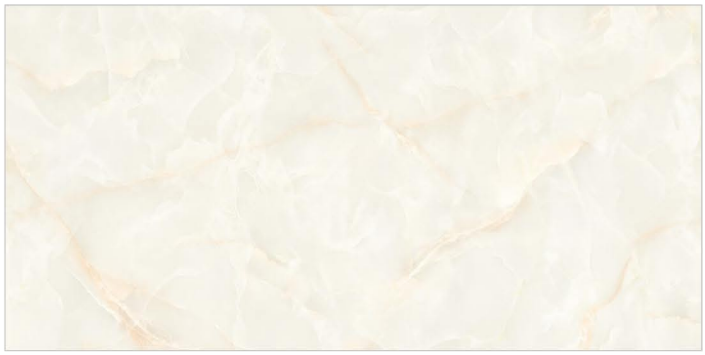



3466

Lwin
TILES







3467

Lwin
TILES










3468

Lwin
TILES




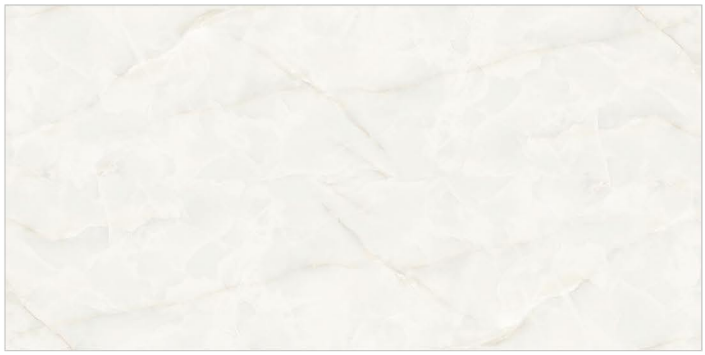






3469

Lwin
TILES

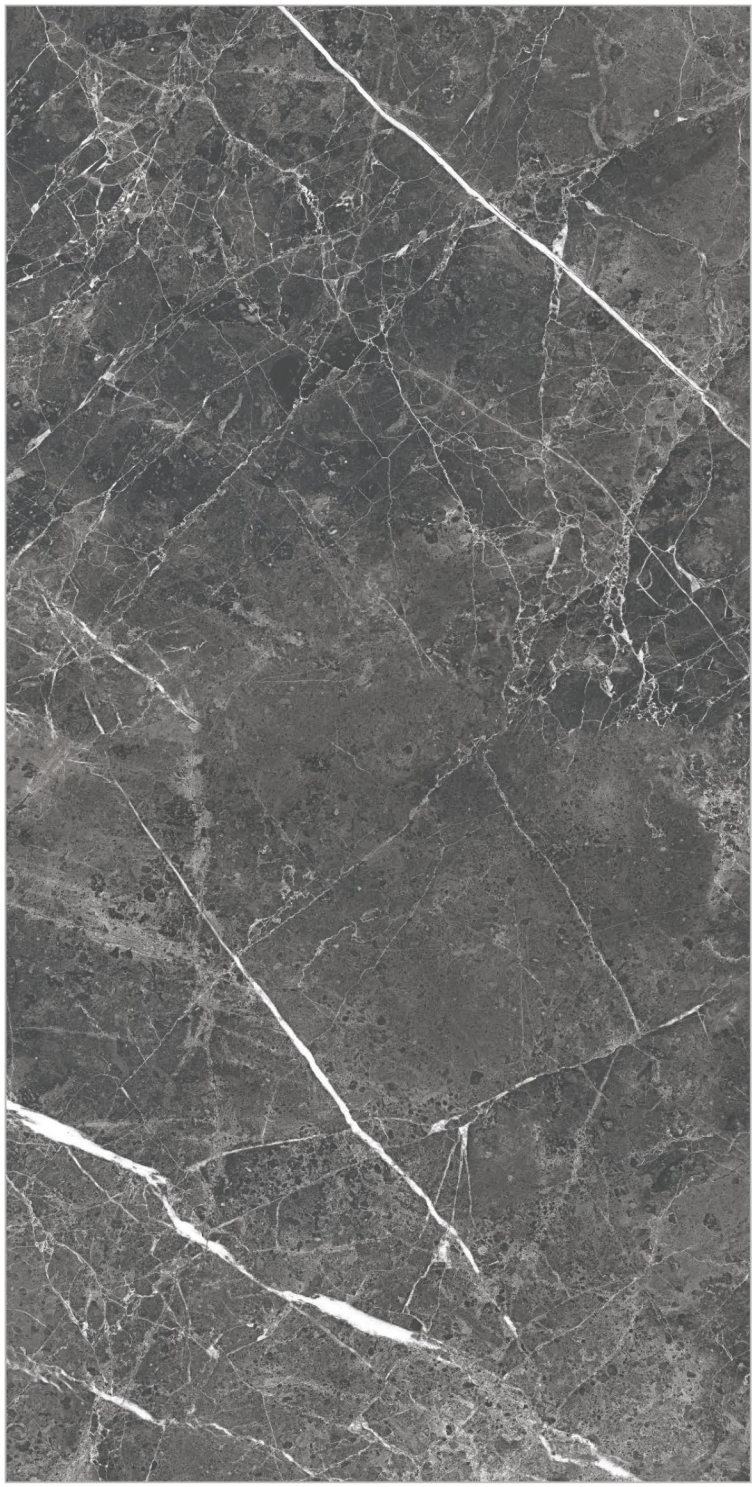

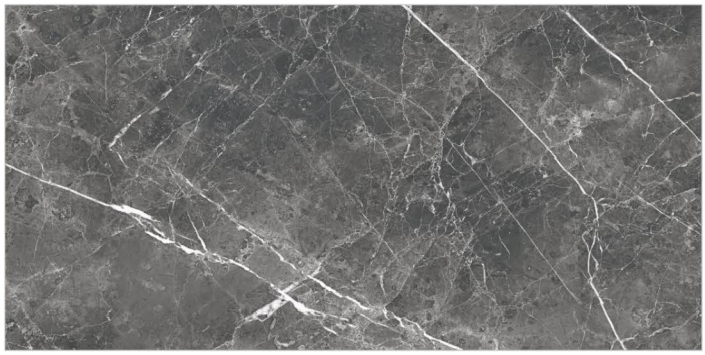


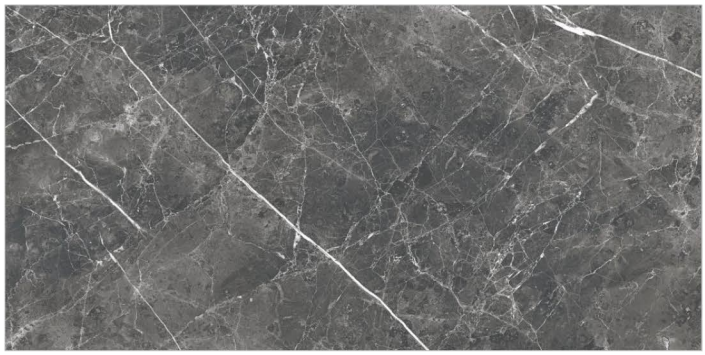

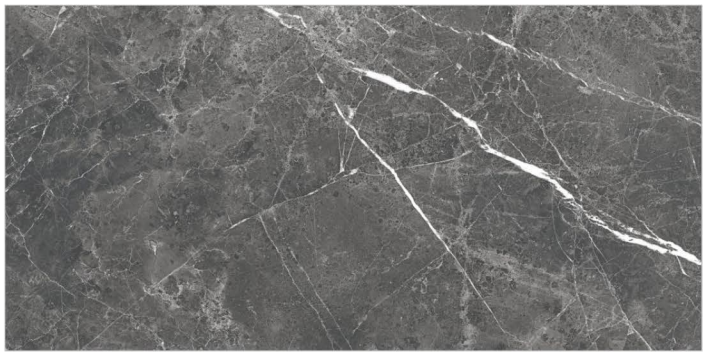


3470

Lwin
TILES

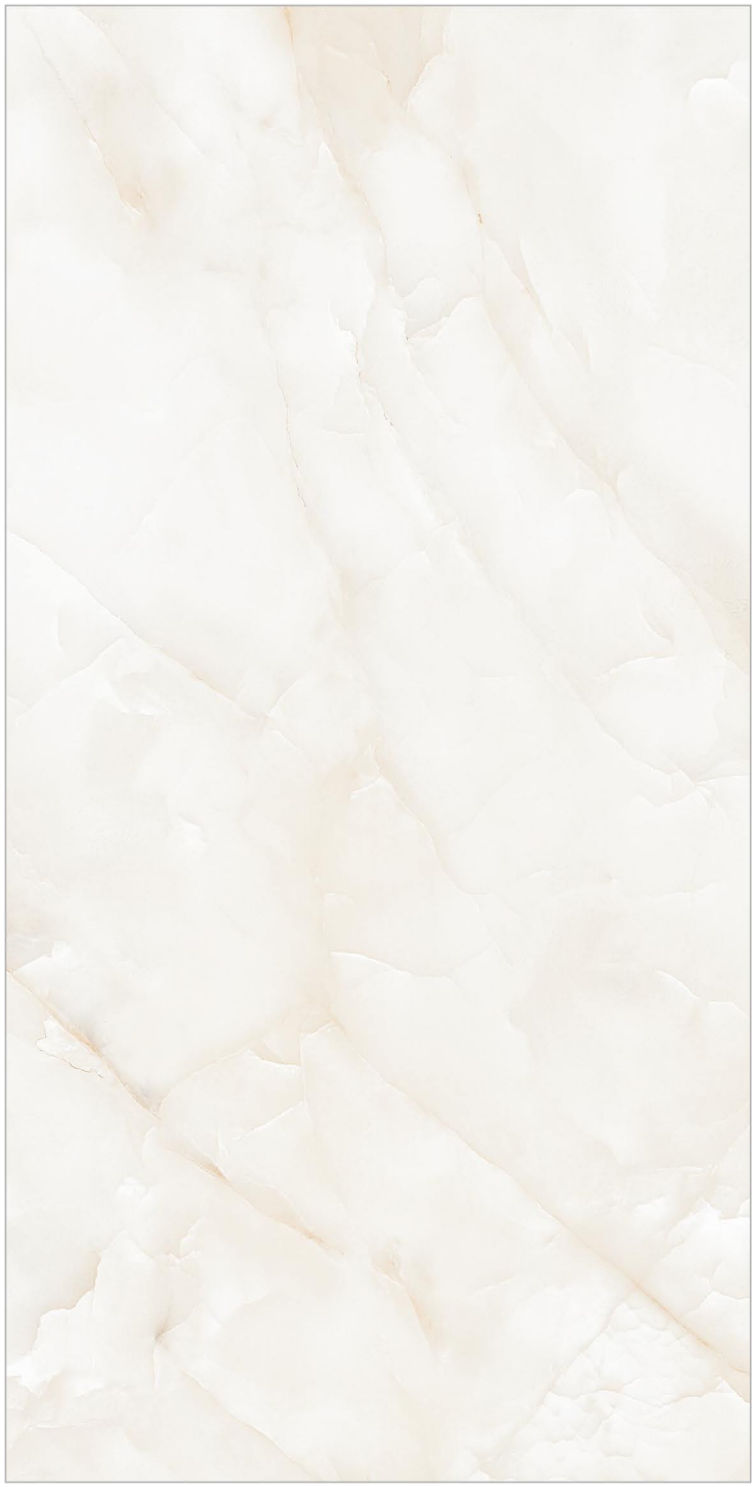



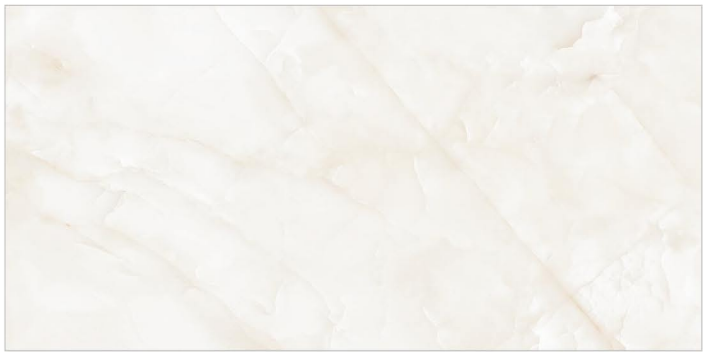


3471

Lwin
TILES






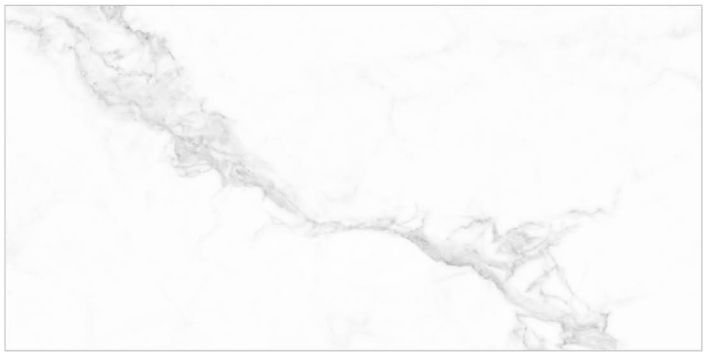



3472

Lwin
TILES



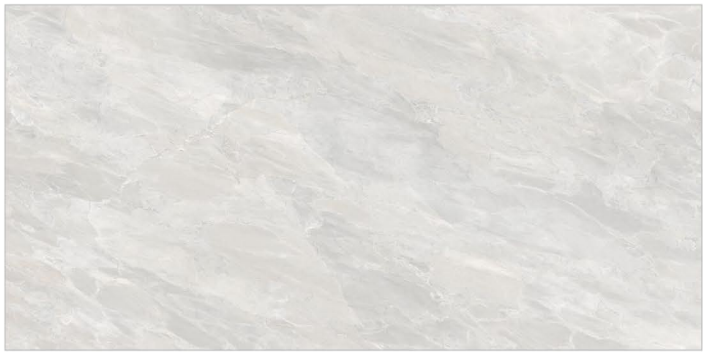

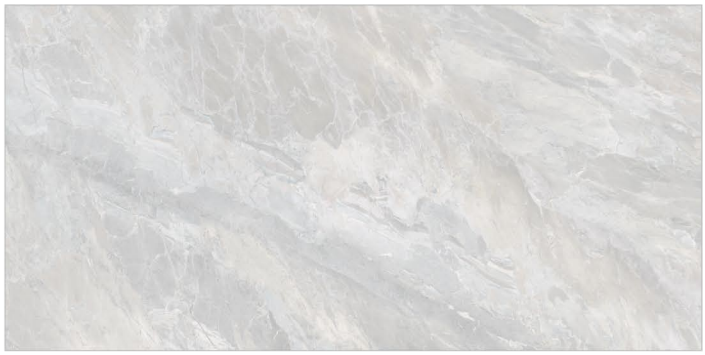

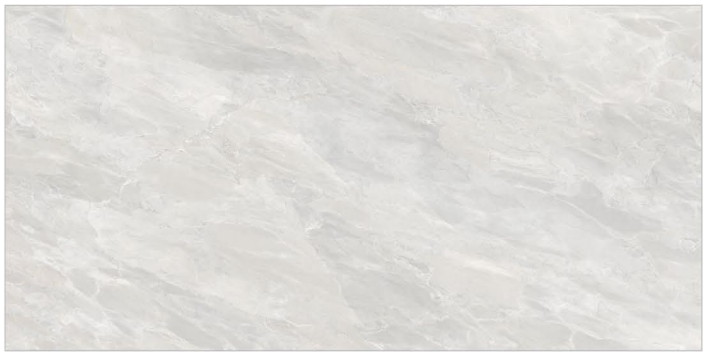


3473

Lwin
TILES







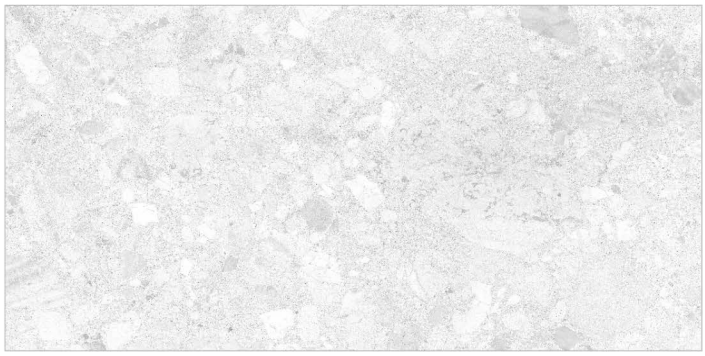

3474

Lwin
TILES










3475

Lwin
TILES

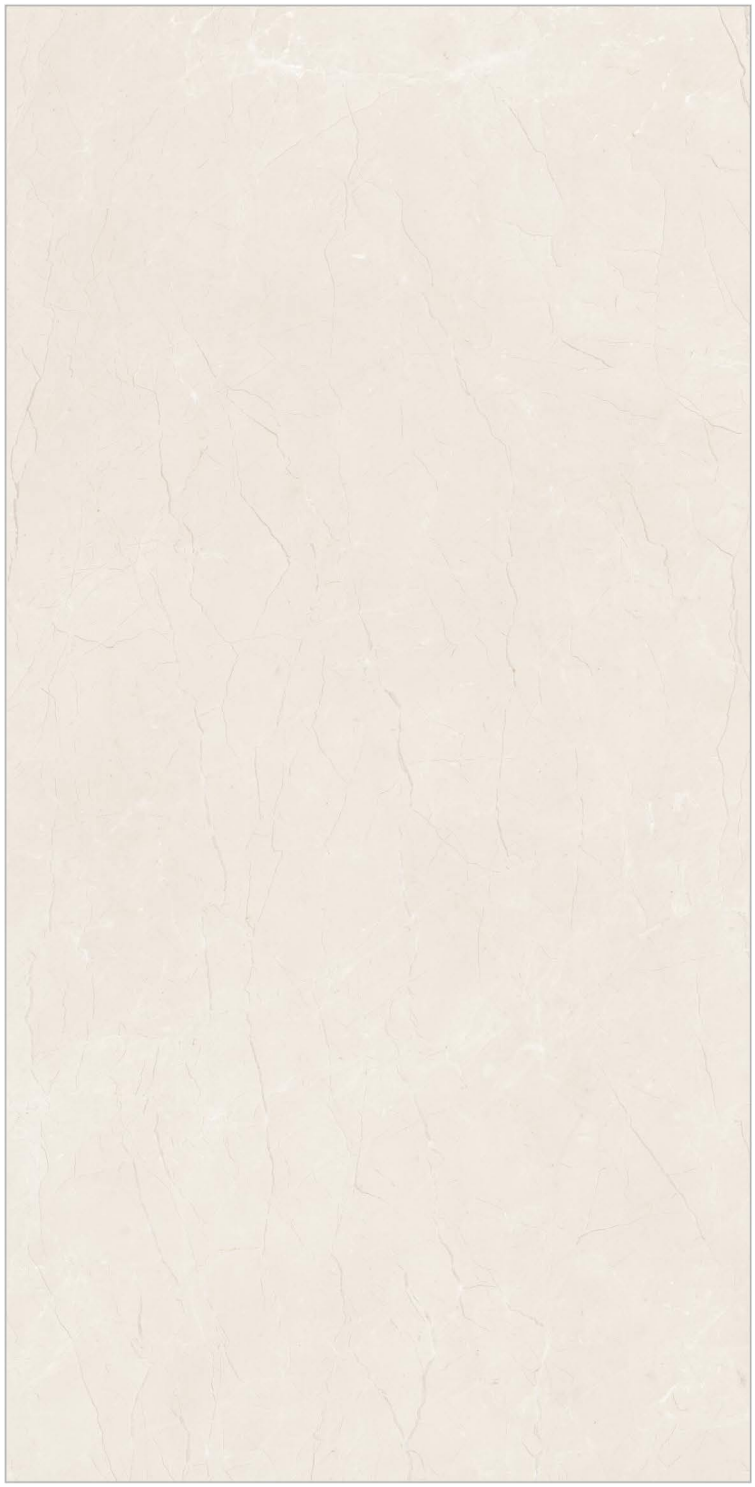





3476

Lwin
TILES









3477

Lwin
TILES










3478

Lwin
TILES

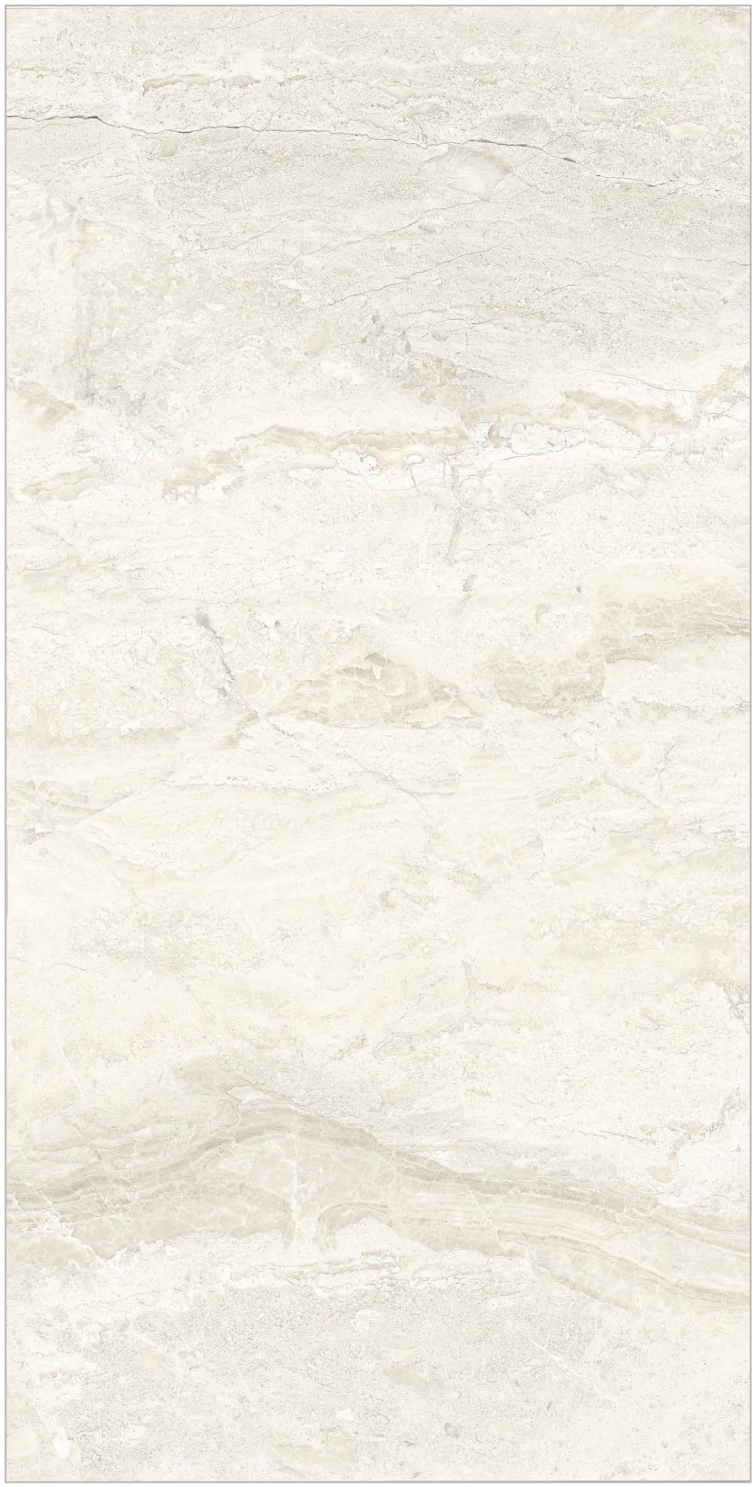








3479

Lwin
TILES

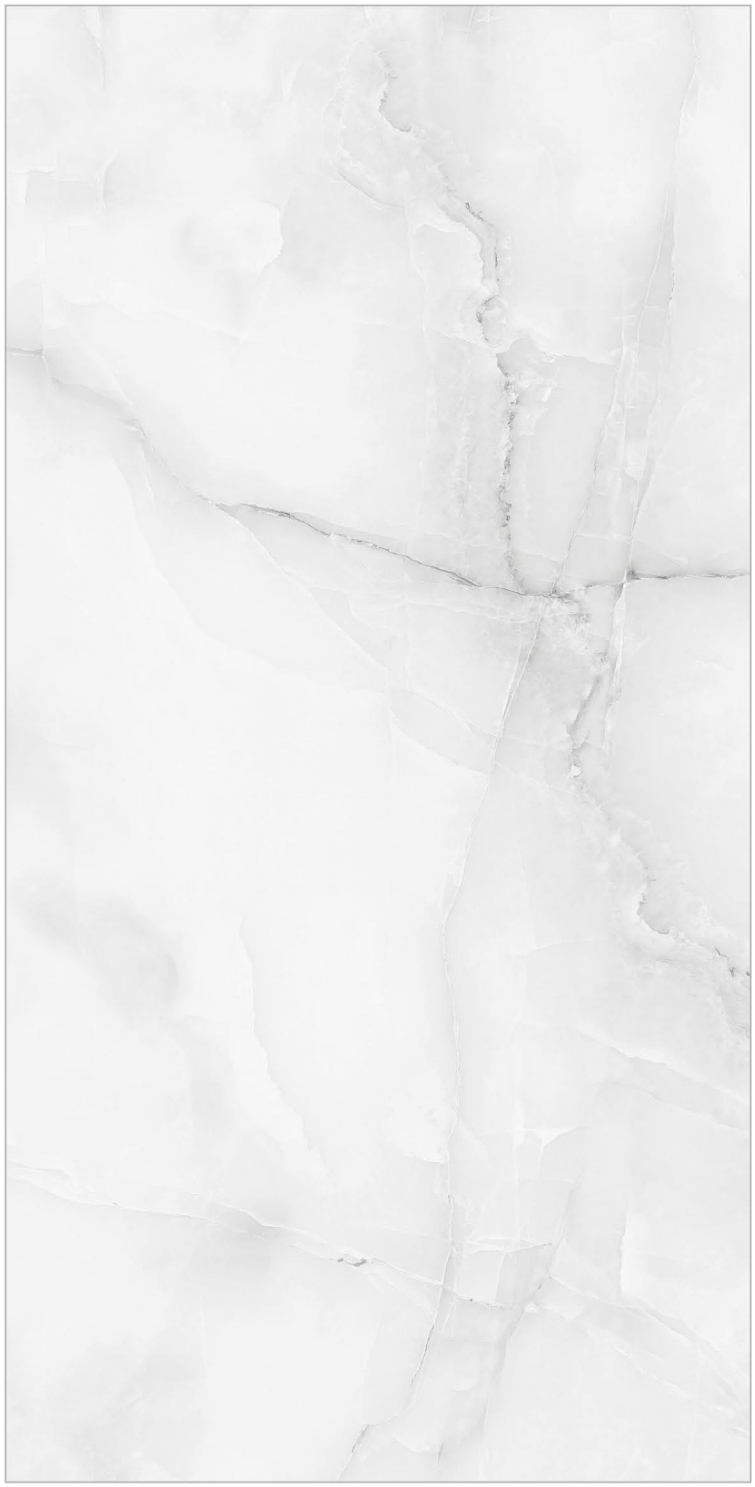







3480

Lwin
TILES










3481

Lwin
TILES

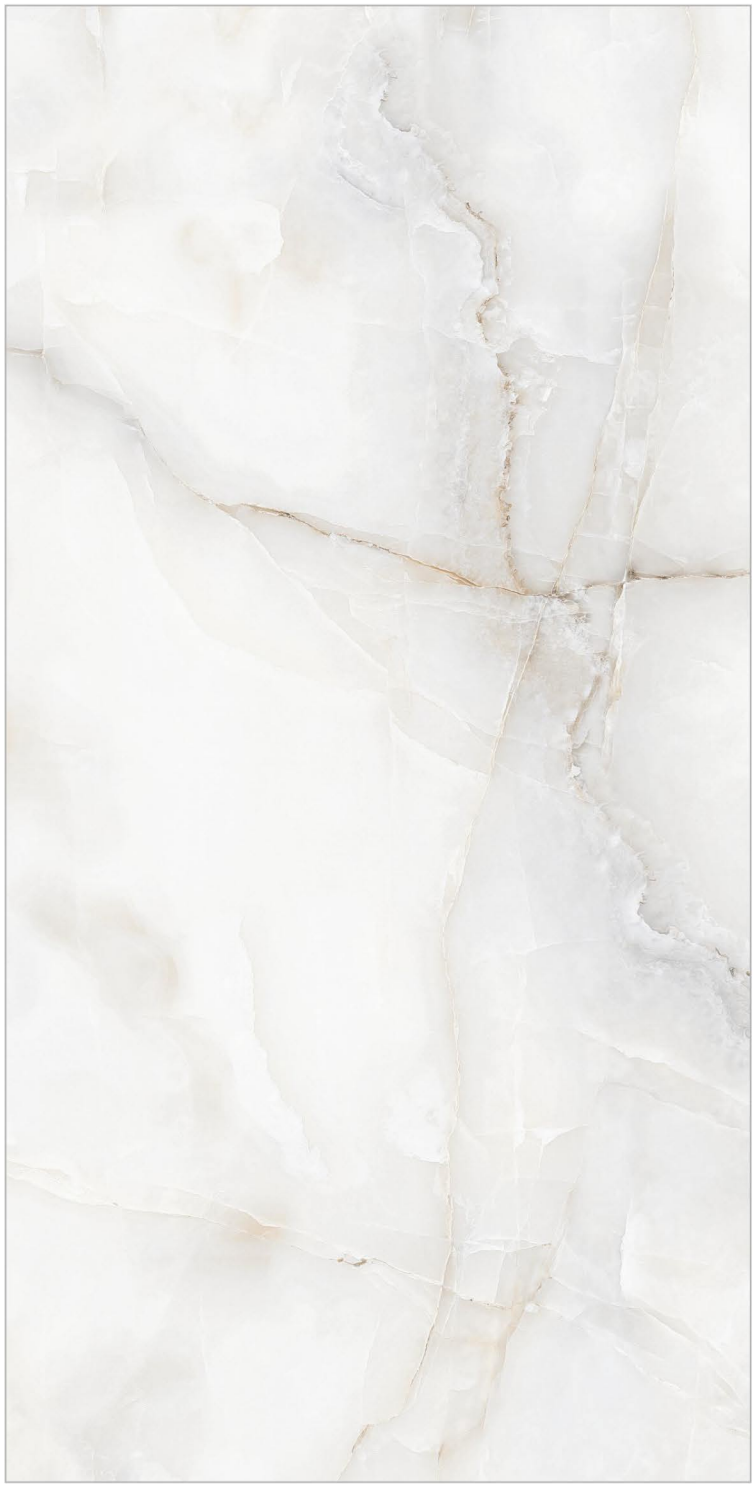







3482

Lwin
TILES









3484

Lwin
TILES









3485

Lwin
TILES









3486

Lwin
TILES









3487

Lwin
TILES









3488

Lwin
TILES









3489

Lwin
TILES












3490

Lwin
TILES

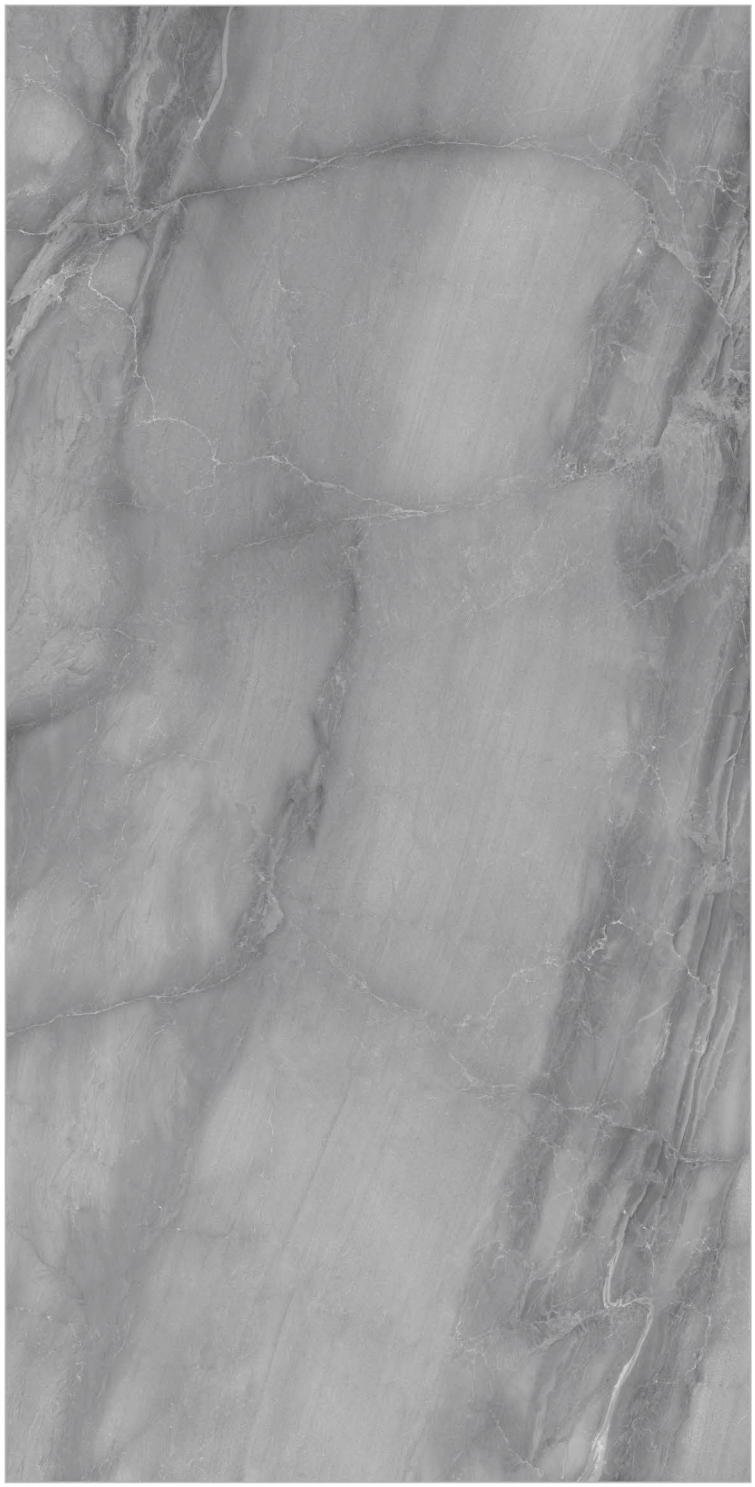

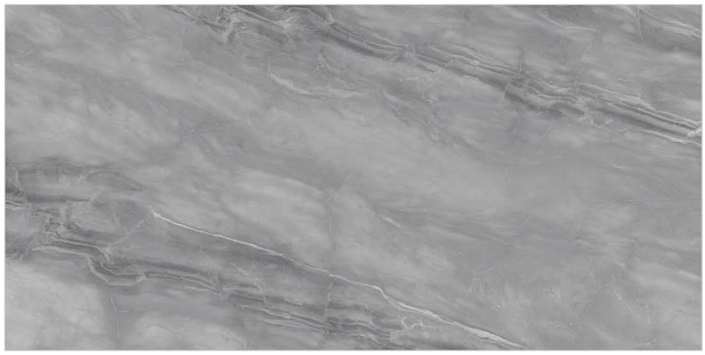

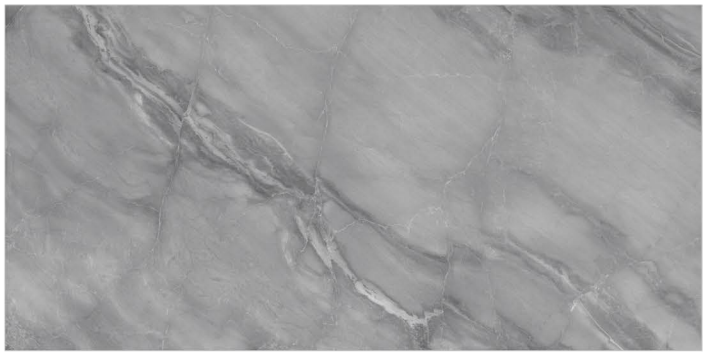



3491

Lwin
TILES







3492

Lwin
TILES









3493

Lwin
TILES









3494

Lwin
TILES









3495

Lwin
TILES







3496

Lwin
TILES







3497

Lwin Tiles Quality Standards

Standards according to **ISO 13006: Annex G - EN 14411: Annex G.** Dry - Pressed Ceramic Tiles. **Group BIa (E_b 0.5%)**

Technical Feature	Test Method	Requirements		Values	
		%	mm	%	mm
A. Dimensions and Surface Quality					
Length and Width	UNI EN ISO 10545-2	± 0.6%	± 2.0	± 0.20%	± 1.0
Thickness		± 5.0%	± 0.5	± 5.00%	± 0.5
Straightness of Sides		± 0.5%	± 1.5	± 0.20%	± 1.0
Rectangularity		± 0.5%	± 2.0	± 0.20%	± 1.2
Surface Flatness a) Centre curvature b) Edge curvature c) Warpage		 ± 0.5% ± 0.5% ± 0.5%	 ± 2.0 ± 2.0 ± 2.0	 ± 0.20% ± 0.20% ± 0.20%	 ± 1.0 ± 1.0 ± 1.0
Surface Quality		A minimum of 95% of the tiles shall be free from visible defects that would impair the appearance of a major area of tiles.		Compliant	
B. Physical Properties					
Water Absorption	UNI EN ISO 10545-3	$E_b \leq 0.5\%$ Individual maximum : 0.6% (absorbed water mass)		$E_b \leq 0.1\%$ (absorbed water mass)	
Breaking Strength	UNI EN ISO 10545-4	Min. 1300 N		≥ 1700 N	
Modulus of Rupture		Average minimum 35 N/mm² Individual minimum 32 N/mm²		≥ 37 N/mm²	
Frost Resistance	UNI EN ISO 10545-12	Required		Compliant	
Coefficient of Linear Thermal Expansion From Ambient Temperature to 100°c	UNI EN ISO 10545-8	Required		$6 \times 10^{-6}\ K^{-1}$ max	
Scratch Hardness (Mohs scale)	EN 101	Declared by the producer		3 to 6 Depends on Finish & Color	
Crazing Resistance	UNI EN ISO 10545-11	Declared by the producer		4 Cycle Pass	
C. Chemical Properties					
Resistance to Staining	UNI EN ISO 10545-14	Minimum Class 3		5	
Resistance to Household Chemicals and Swimming Pool Salts	UNI EN ISO 10545-13	Minimum GB		GA	
Resistance to Low Concentrations of Acids and Alkalis		To be reported		GLA	
Resistance to High Concentrations of Acids and Alkalis		To be reported		GHA	

Note: Colours shown are as accurate as the limitations of the printing results on paper are possible. Prospective customers are advised to inspect a sample of the tile before placing the order. Every effort has been taken to ensure the accuracy of the information given. However, the company reserves its right to change/alter the specifications without any prior notice. Sometime shade variation or size variation may occur, as this is inherent property of ceramic tile industry. Before fixing the tiles, all are advised to follow the laying instructions printed on the corrugated box of the tile. Company does not take/carry any responsibility of what so ever nature, once tiles are laid.

Lwin
TILES

Office

Om Decora 9 Square,150 Feet Ring Road,
Nana Muva, Rajkot Gujarat 360003 - INDIA

Factory

Jivapar Jetpar Road,
Near Levita Granito LLP Morbi Gujarat 363630 - INDIA
www.L-wintiles.com
Info@L-wintiles.com

Designed By @lshitvastudio