Lwin
TILES




Carving

Series

WWW.L-WINTILES.COM

Available
Sizes

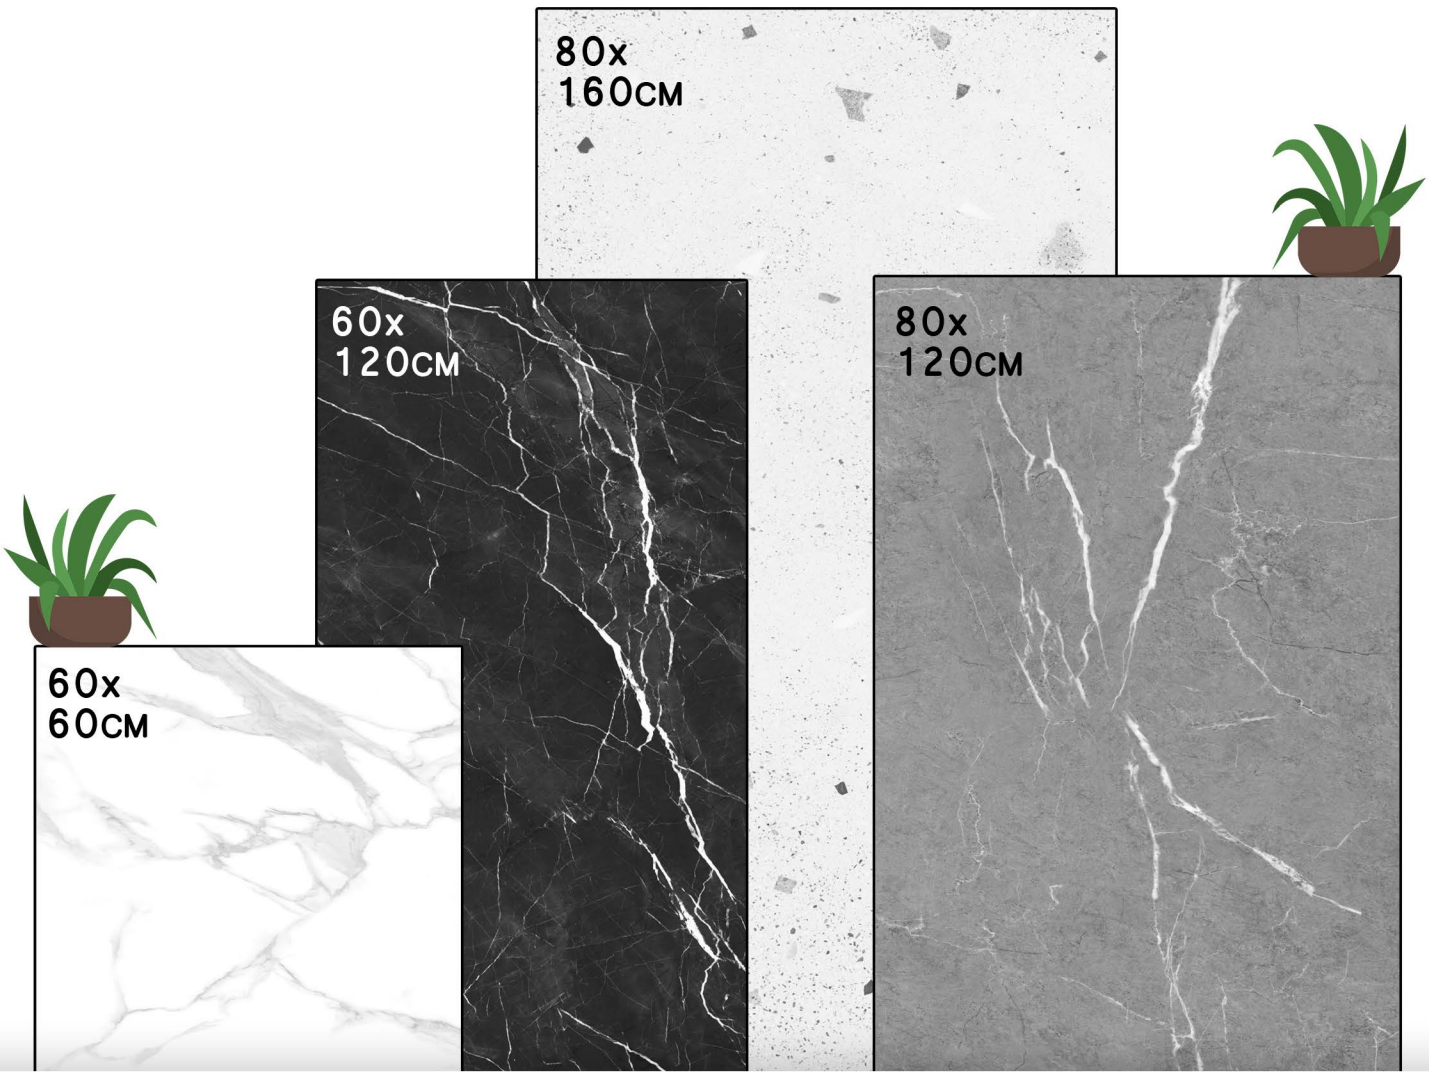

Dimensional
Stability

Acid
Resistance

Stain
Resistance

High
Durable


Home
Applicable

Factory
Applicable

Supermart
Applicable

Hotel
Applicable

About
Us

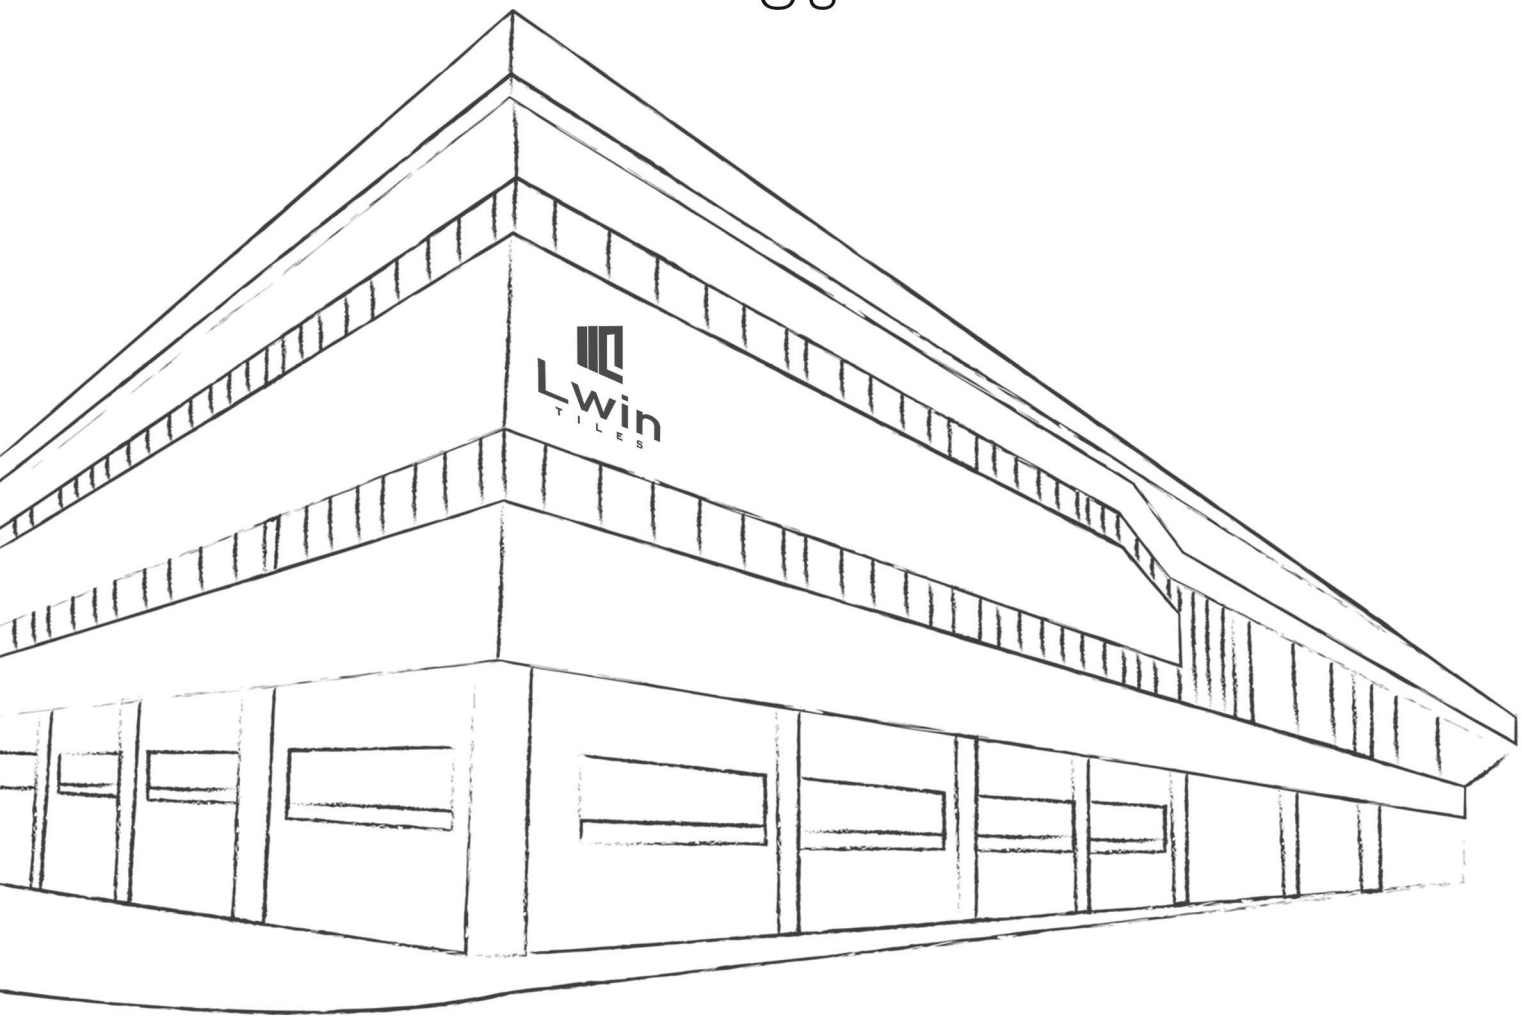

Our **Units** are well equipped with the best technology that allowing us to produce high-quality tiles with a cosistently impeccable finish.

Our excellent **Team** closely moniter every phase of the process. They put greatest effort to deliver on our commitments so that we can creat value for our customers.

Our different and wide range of **Design** collections which consist of technical properties.

Lwin
TILES












2201

Lwin
TILES

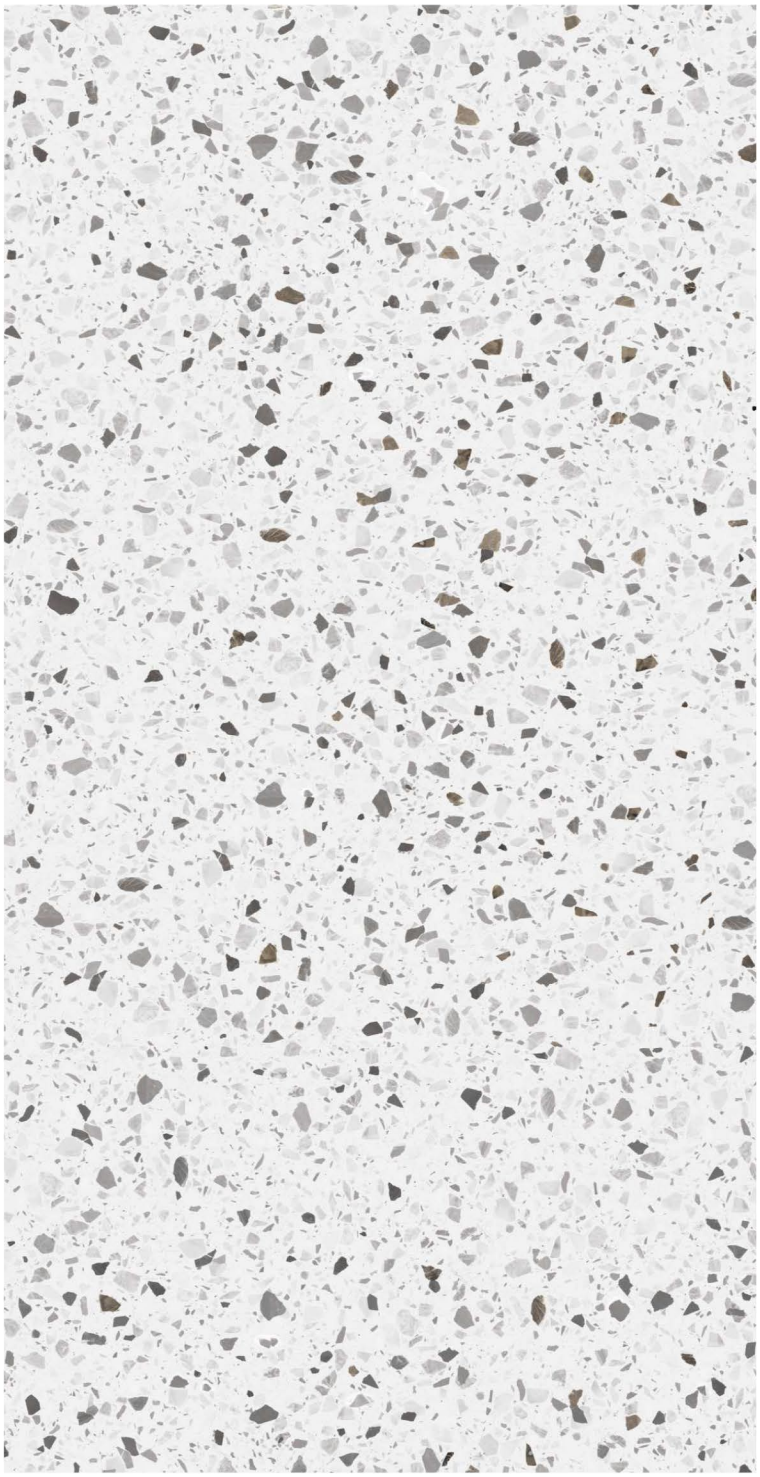

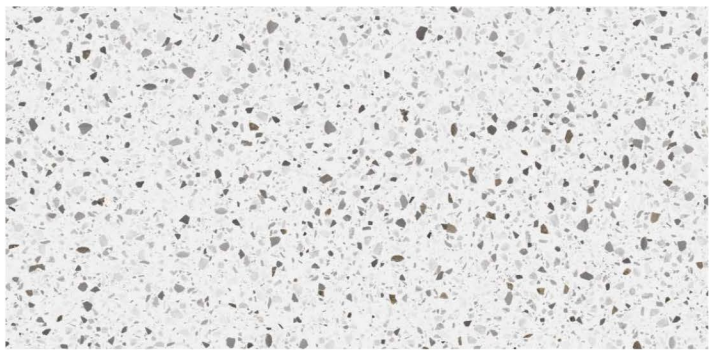



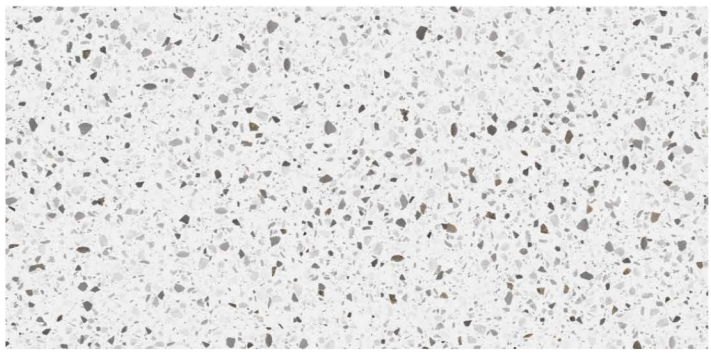

2202

Lwin
TILES











2203

Lwin
TILES



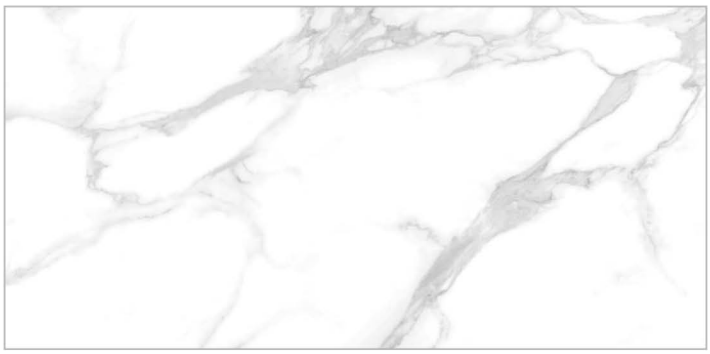



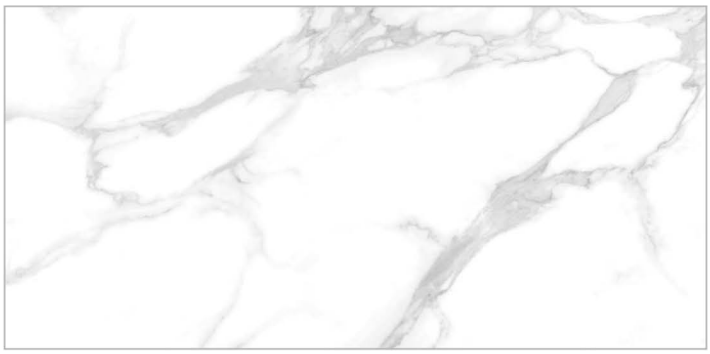

2204

Lwin
TILES





2205

Lwin
TILES



2206

Lwin
TILES









2207

Lwin
TILES









2208

Lwin
TILES










2209

Lwin
TILES

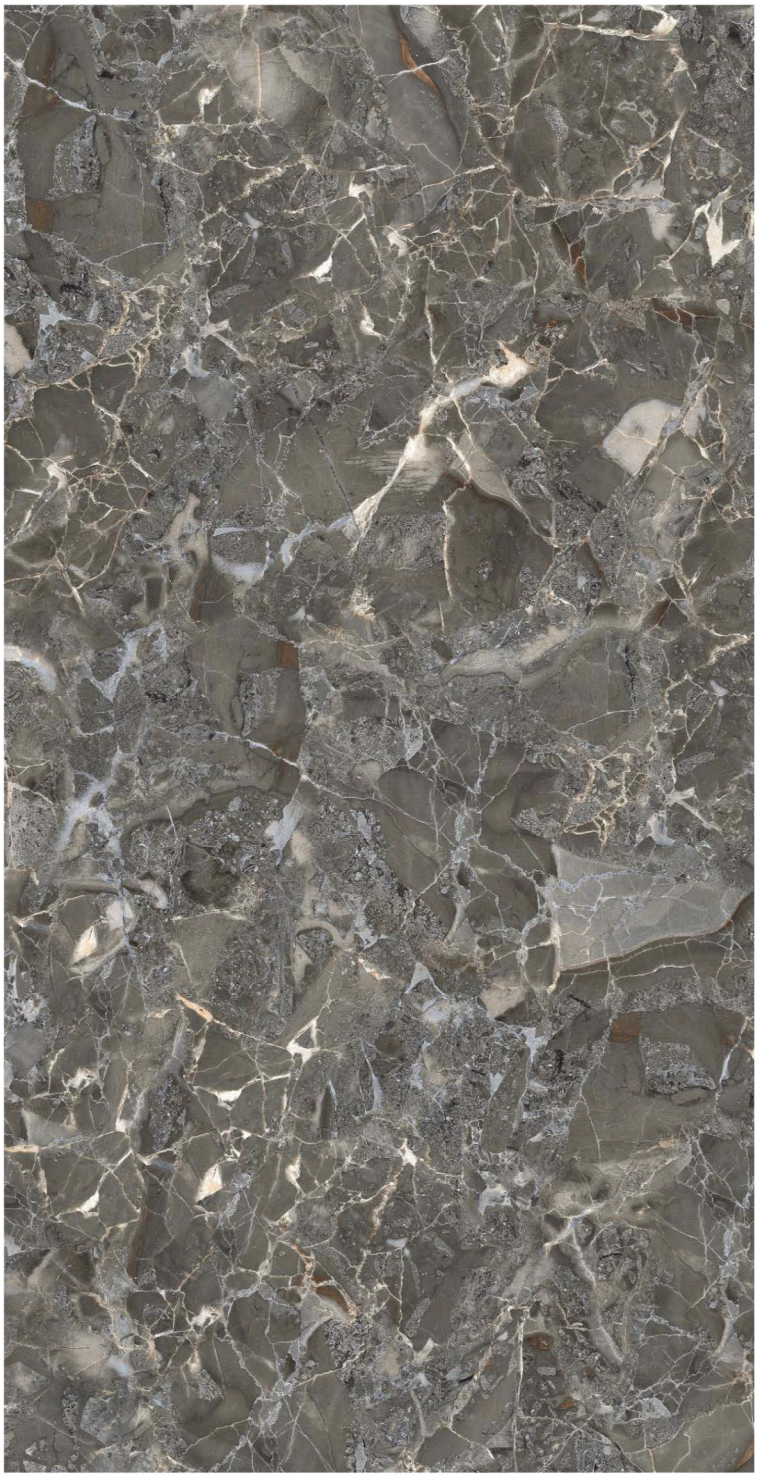








2210

Lwin
TILES

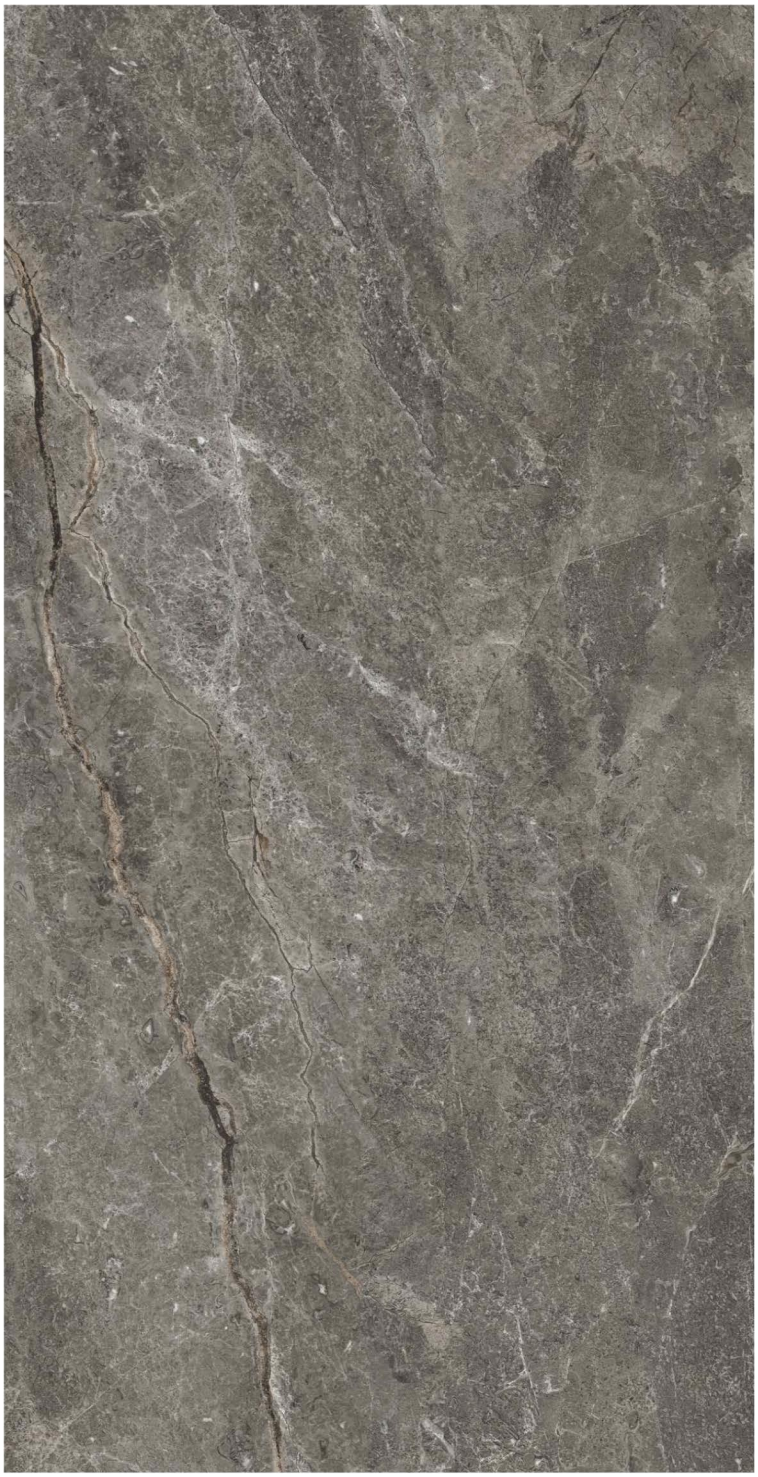







2211

Lwin
TILES









2212

Lwin
TILES










2213

Lwin
TILES

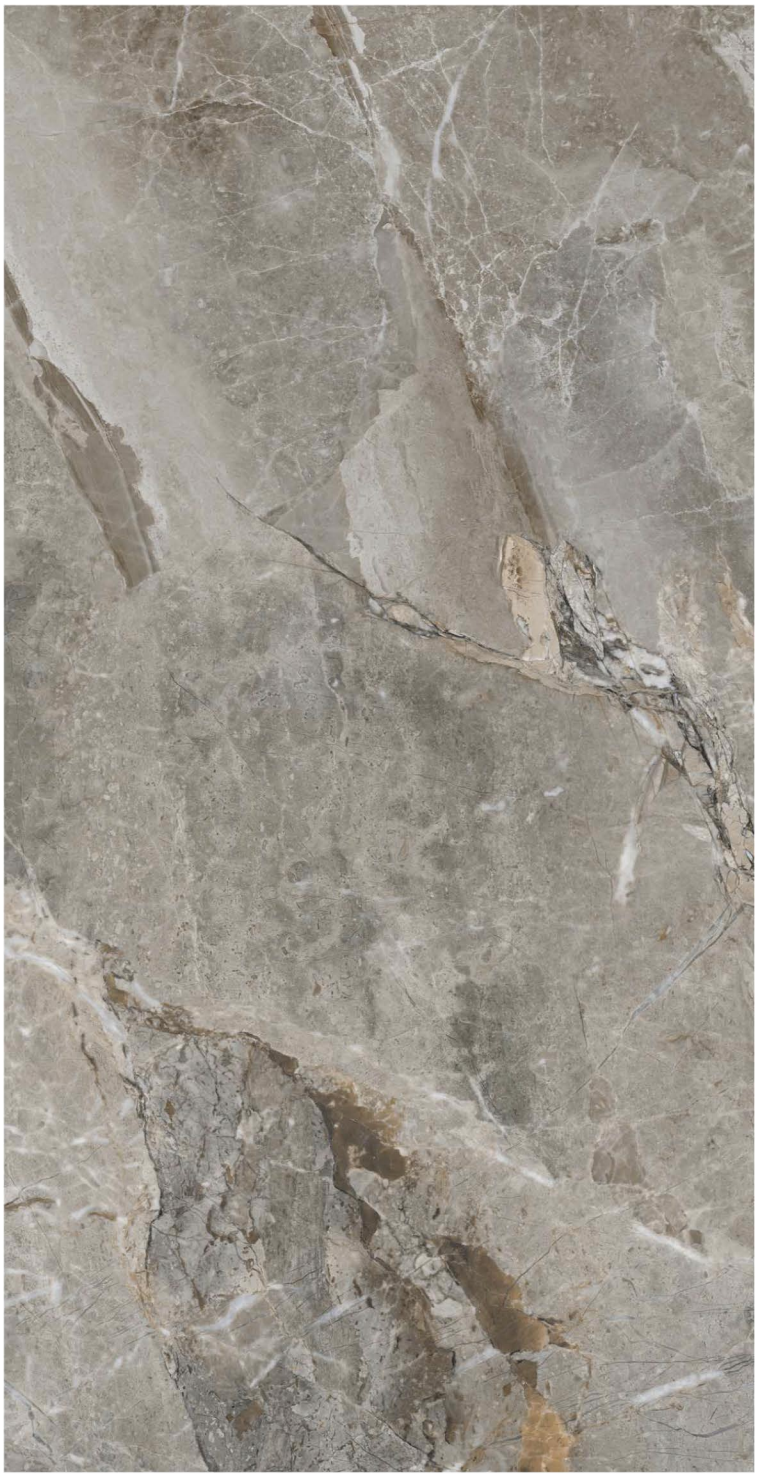








2214

Lwin
TILES

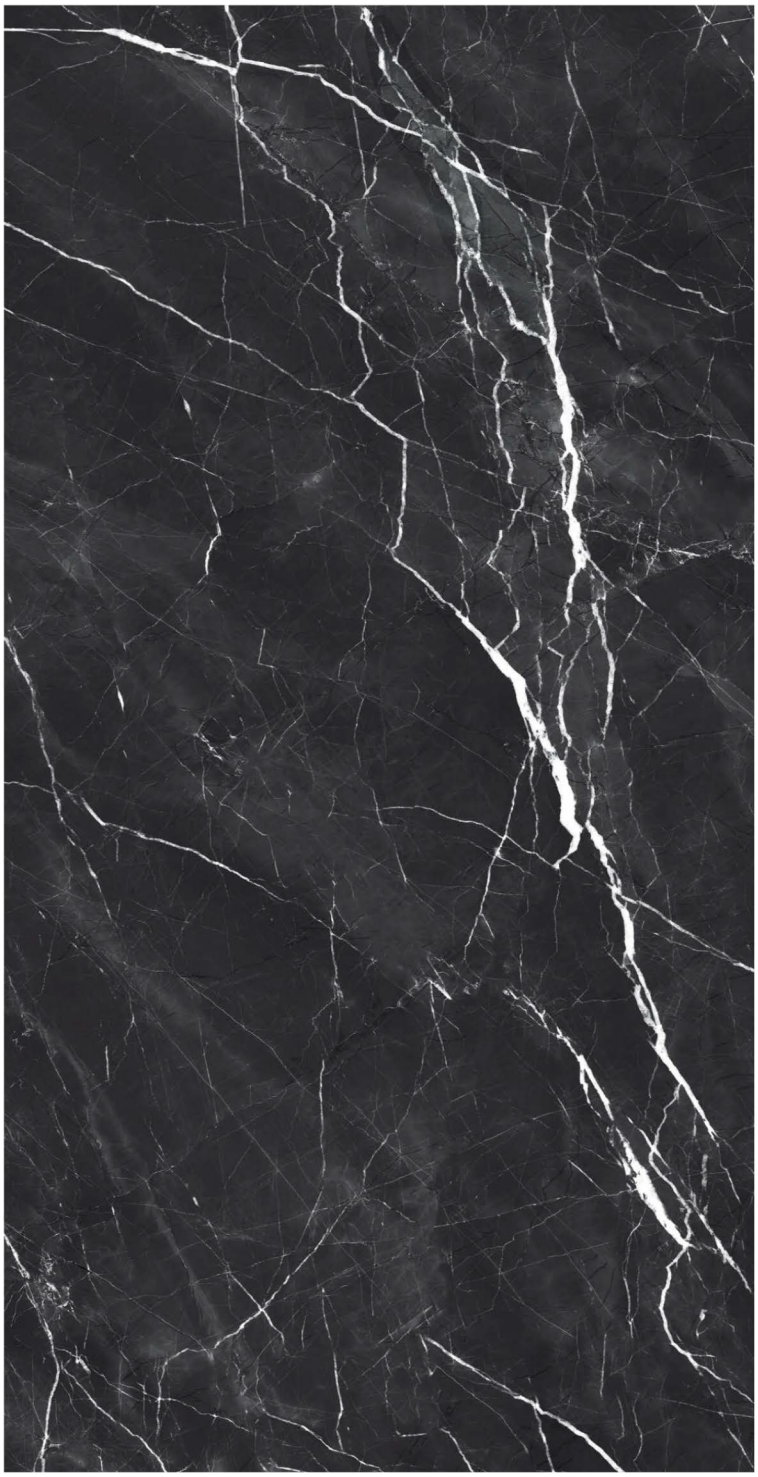








2215

Lwin
TILES

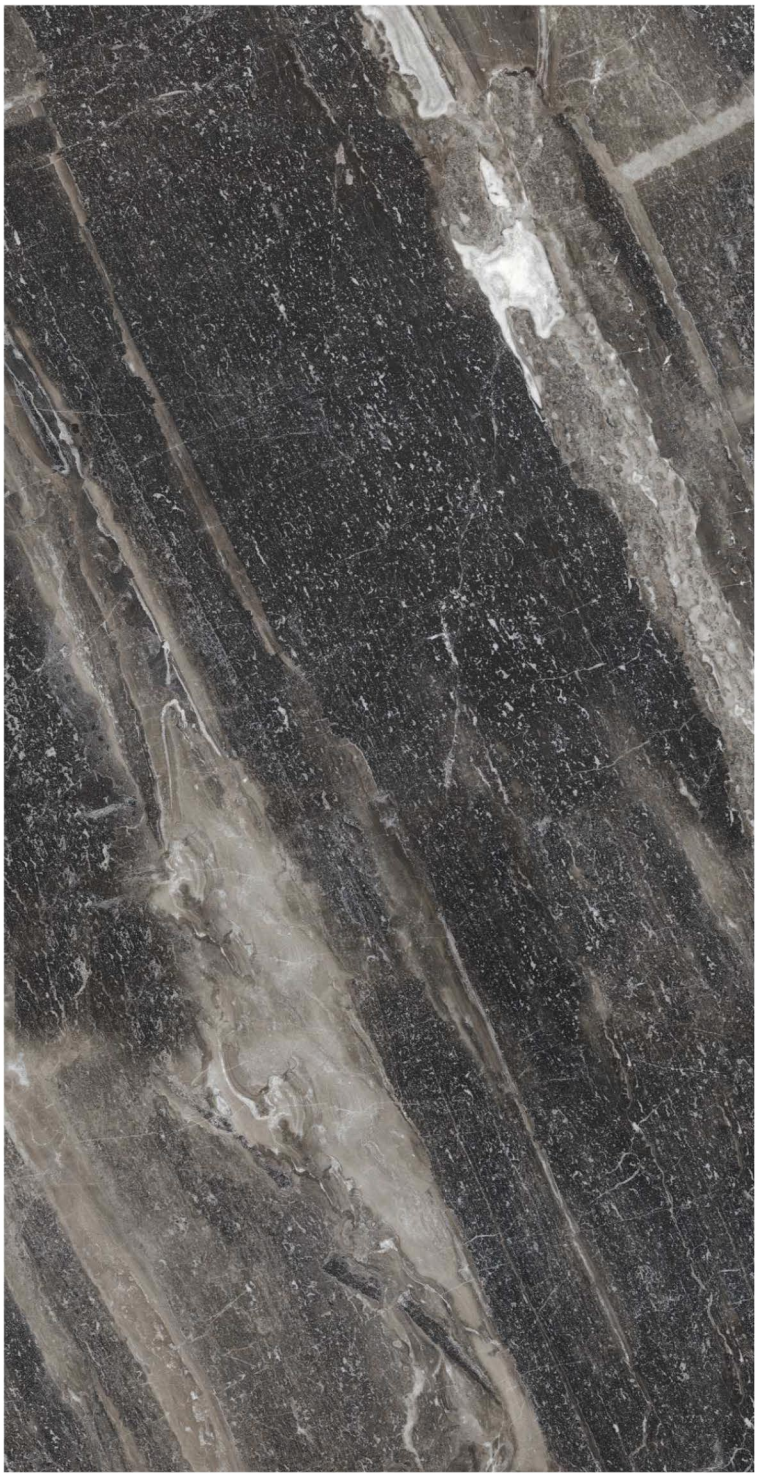









2216

Lwin
TILES

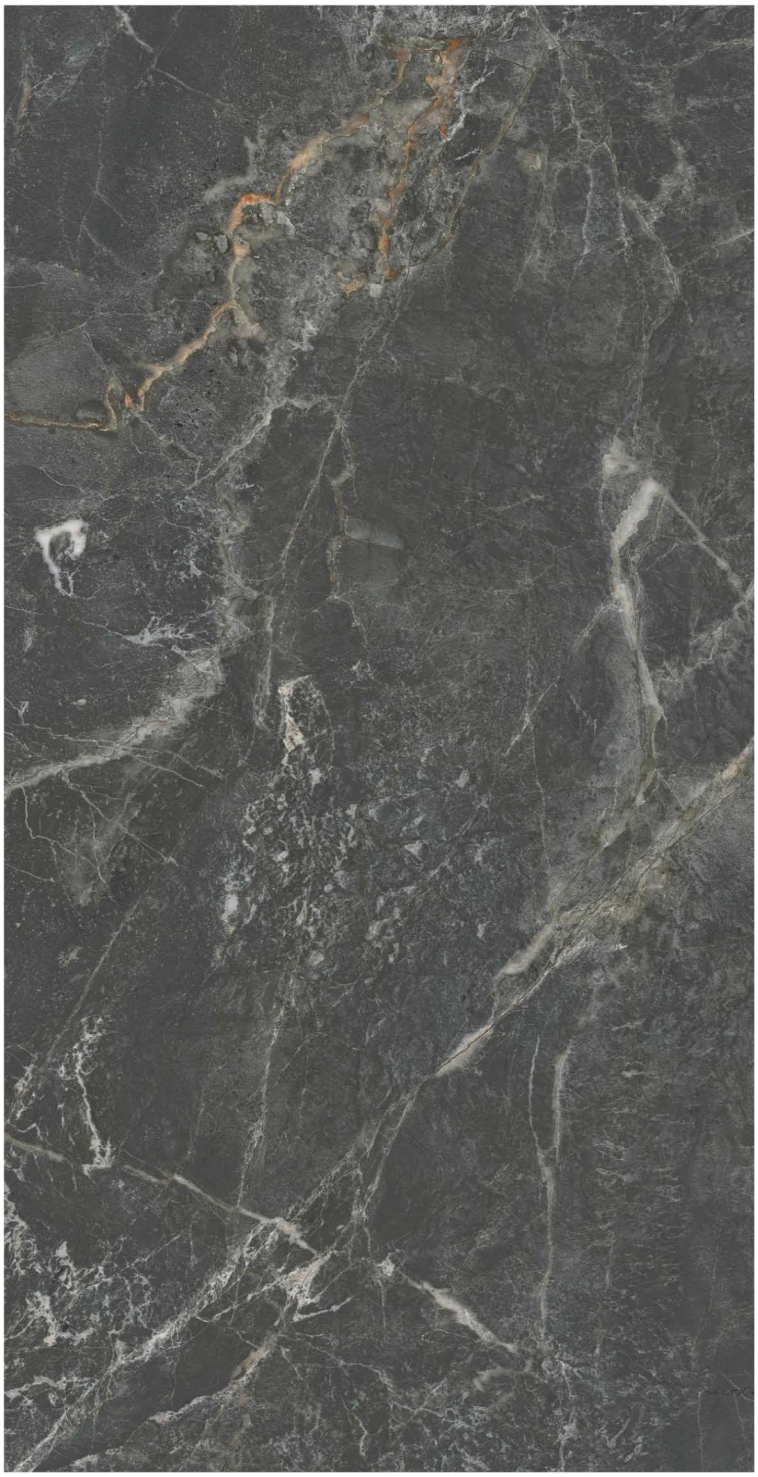




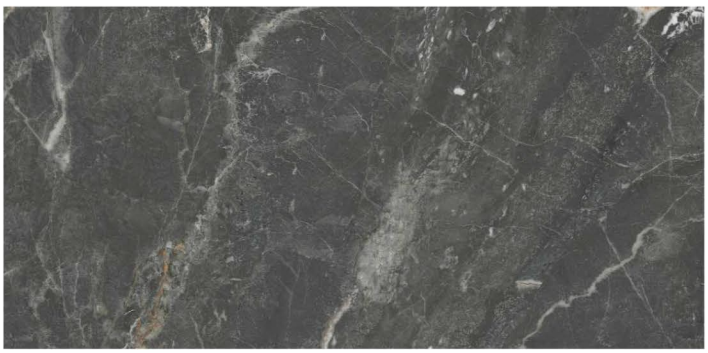



2217

Lwin
TILES

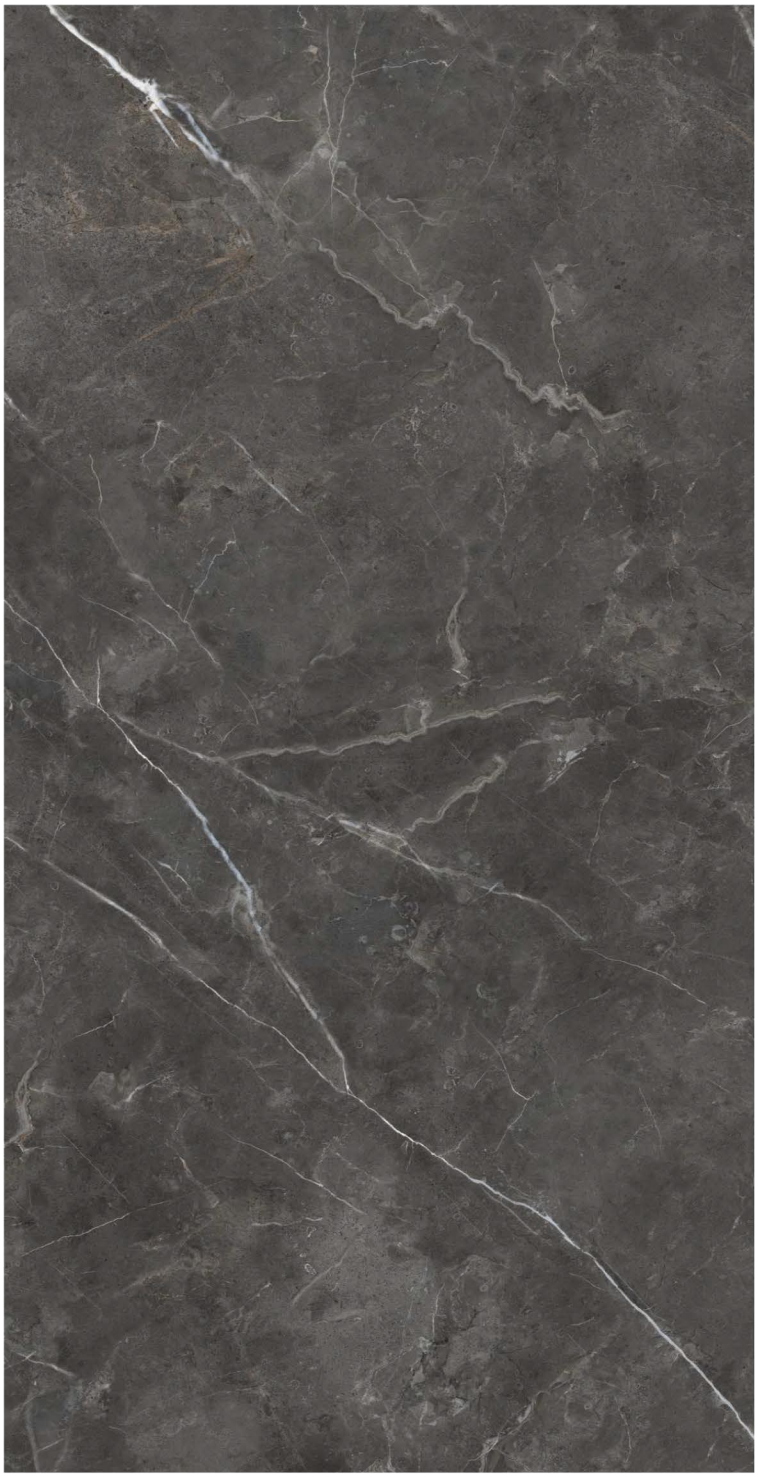








2218

Lwin
TILES

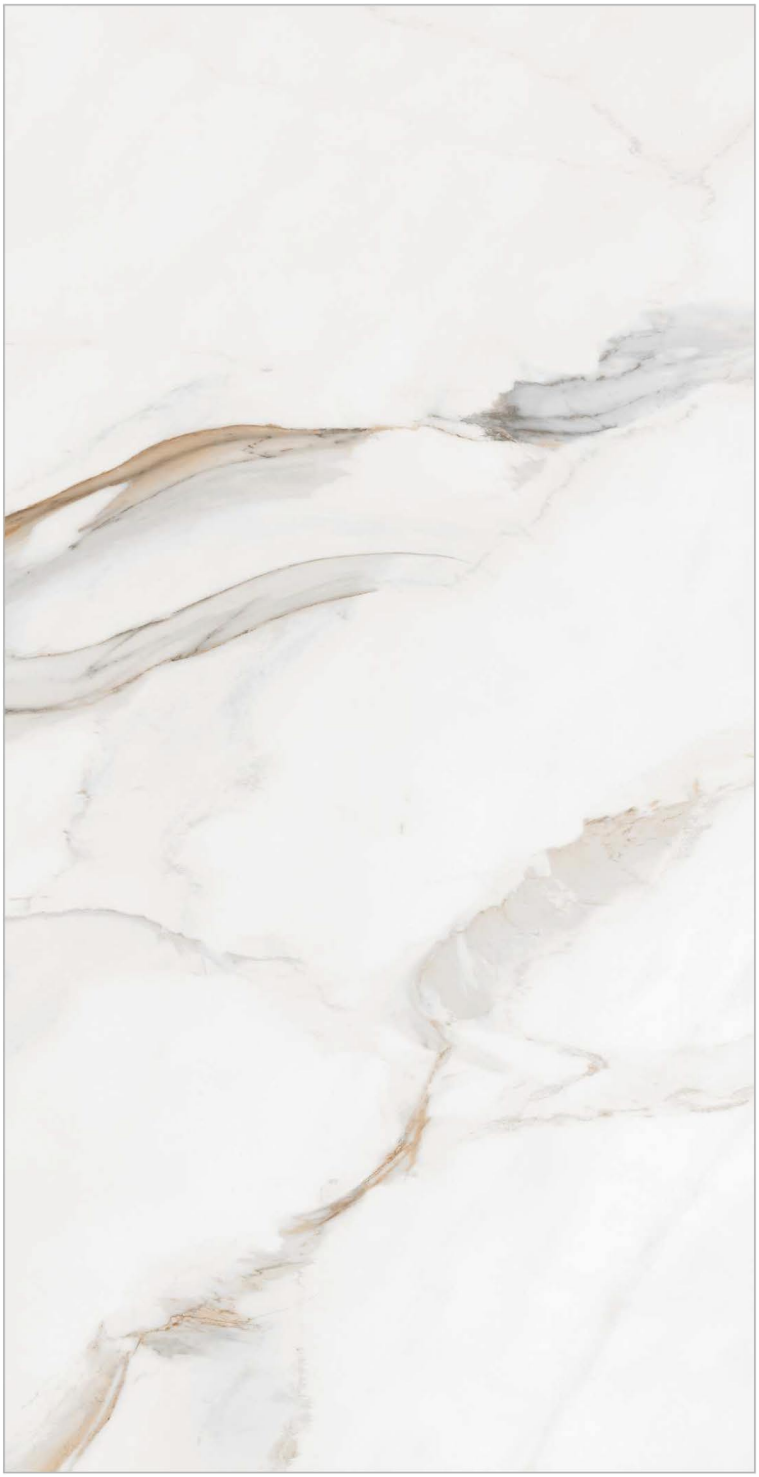







2219

Lwin
TILES










2220

Lwin
TILES



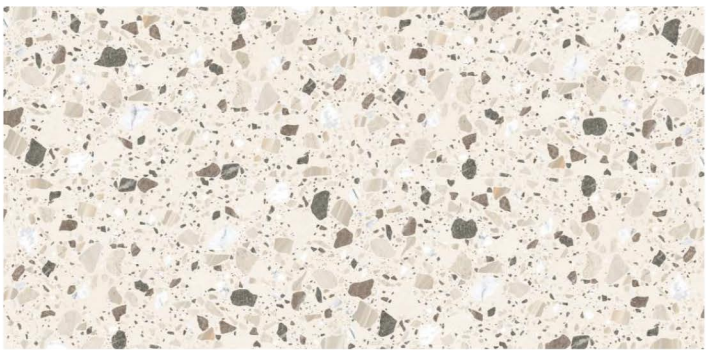









2221

Lwin
TILES

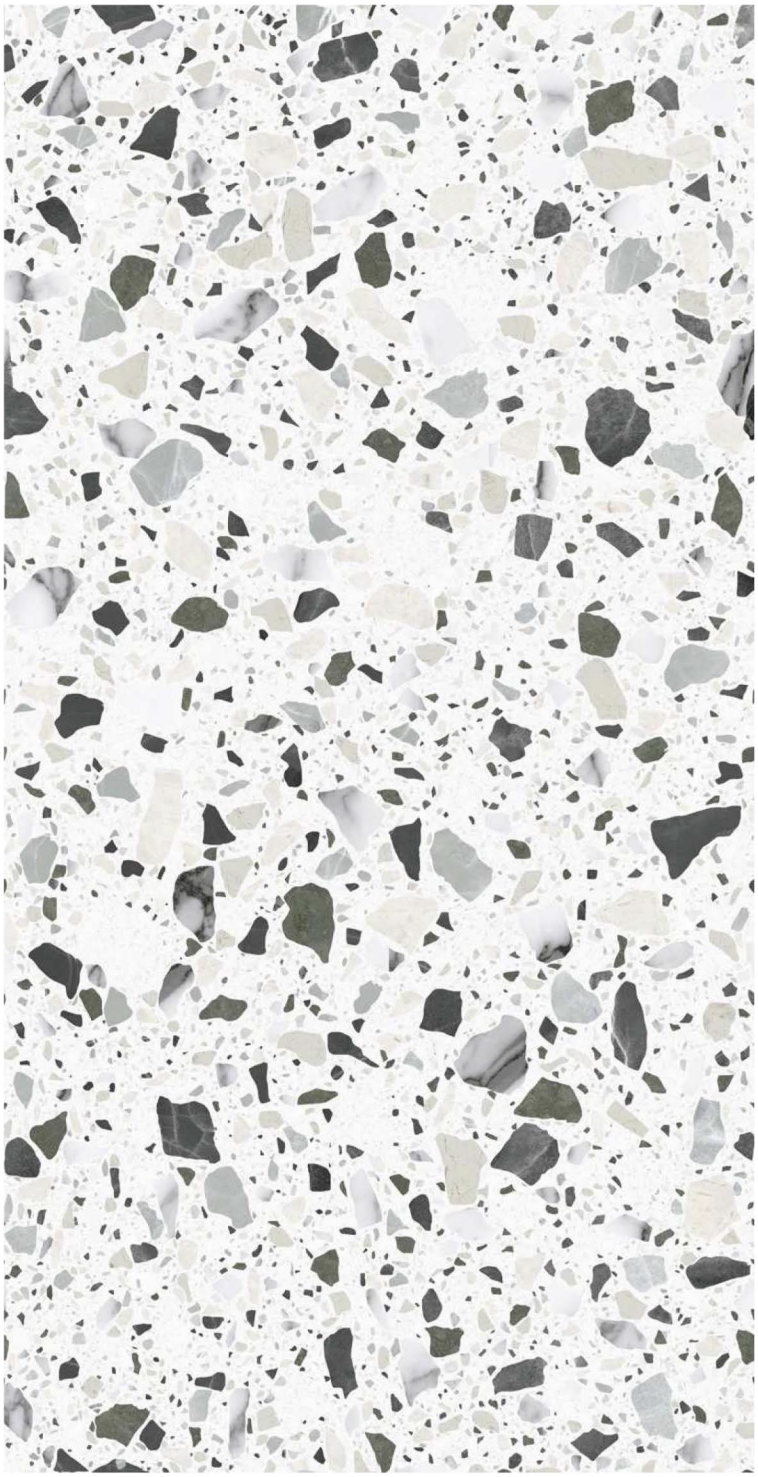

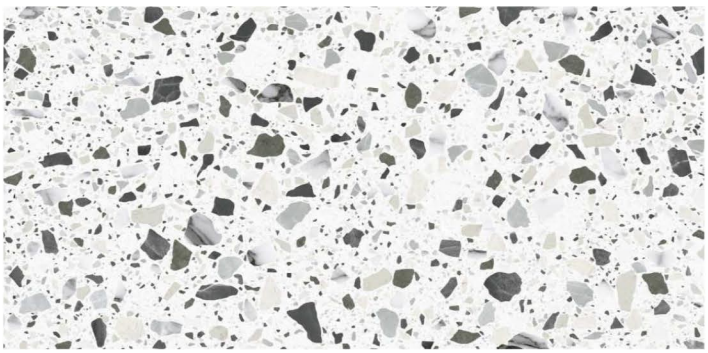

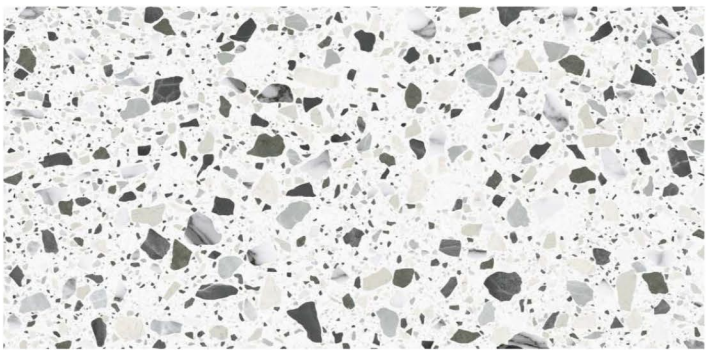

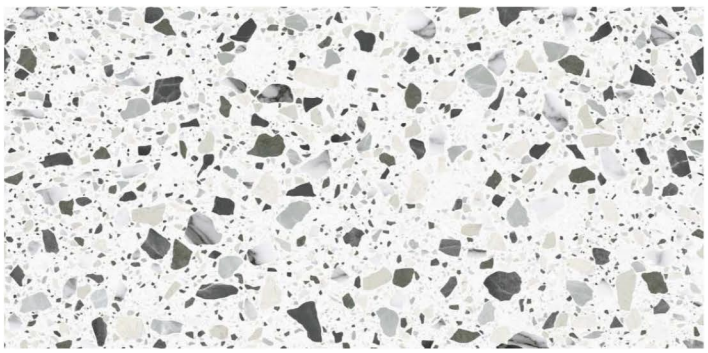

2222

Lwin
TILES











2223

Lwin
TILES





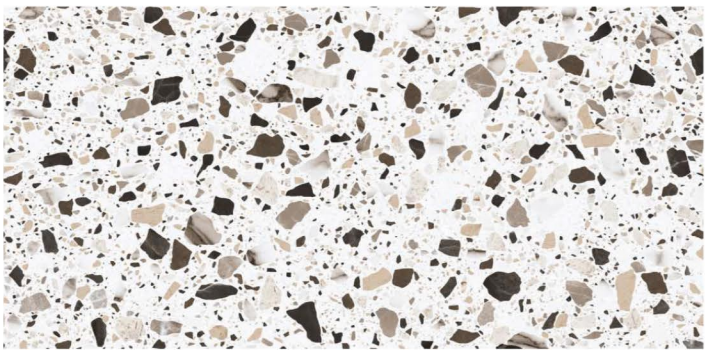


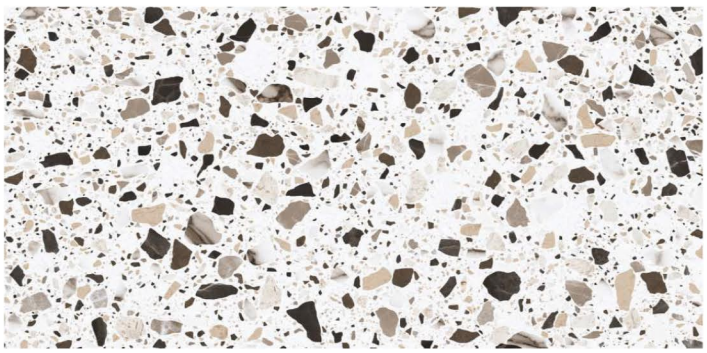


2224

Lwin
TILES



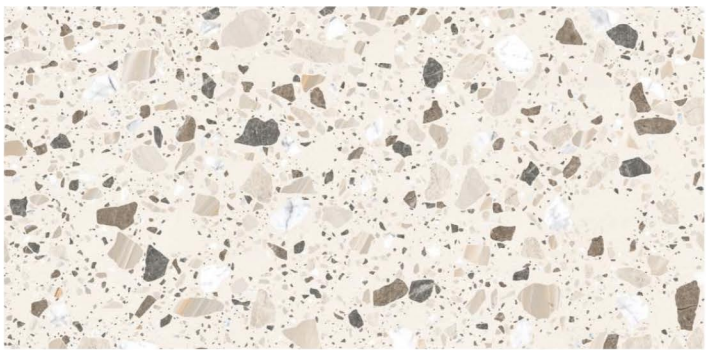

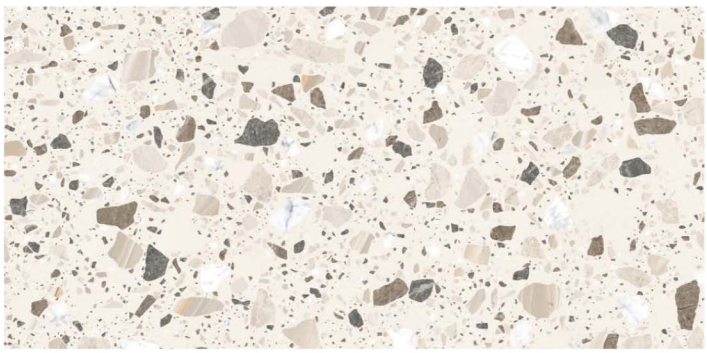



2225

Lwin
TILES









2226

Lwin
TILES









2227

Lwin
TILES









2228

Lwin
TILES










2229

Lwin
TILES

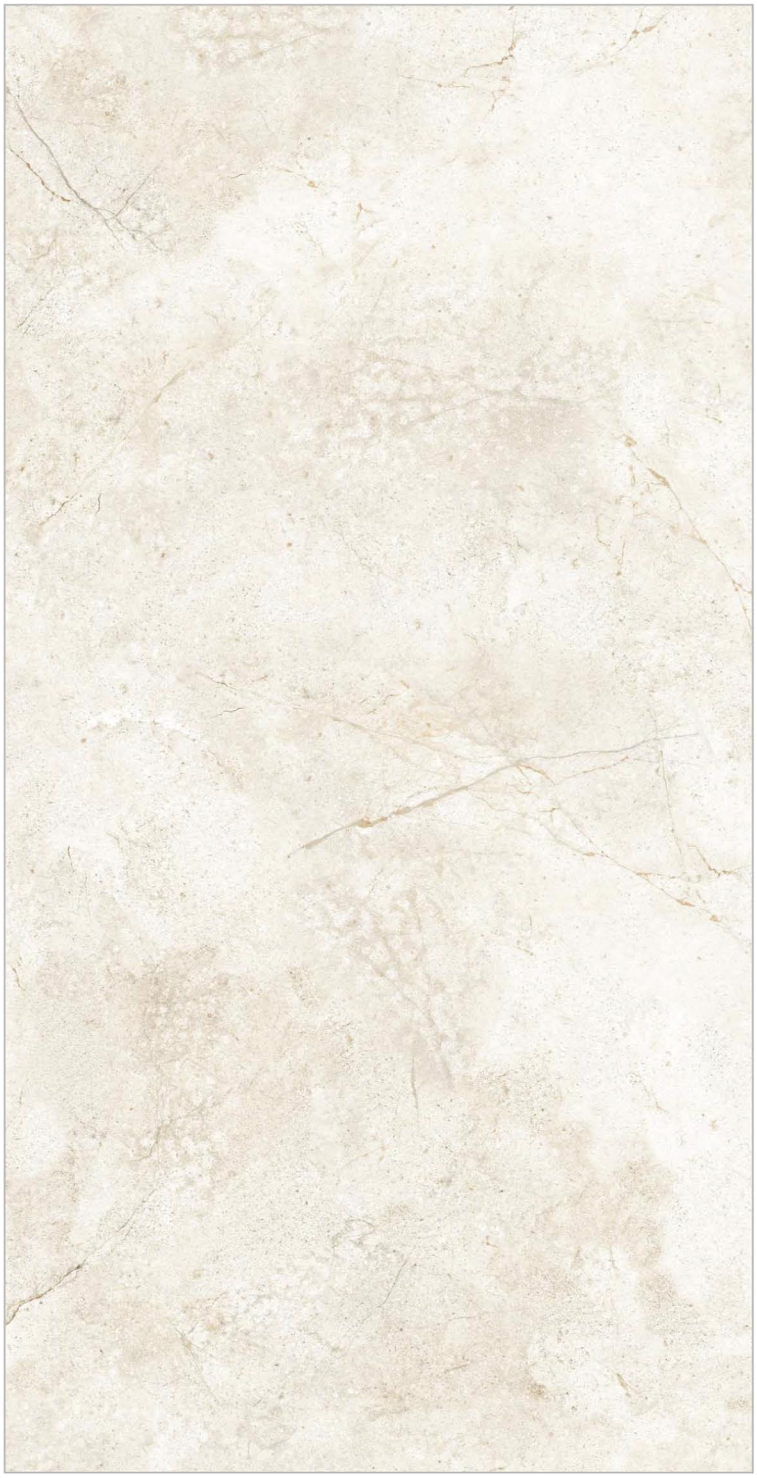










2230

Lwin
TILES

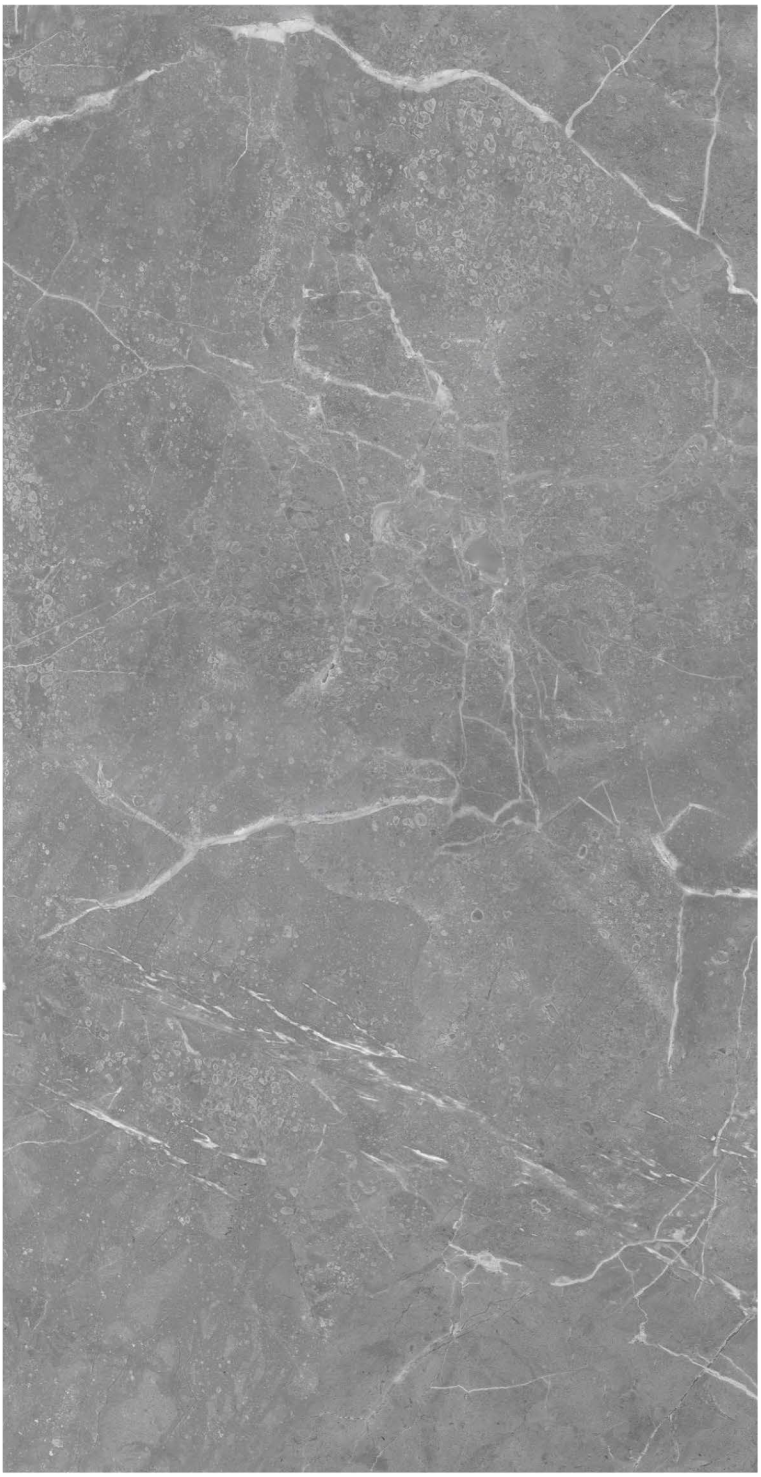



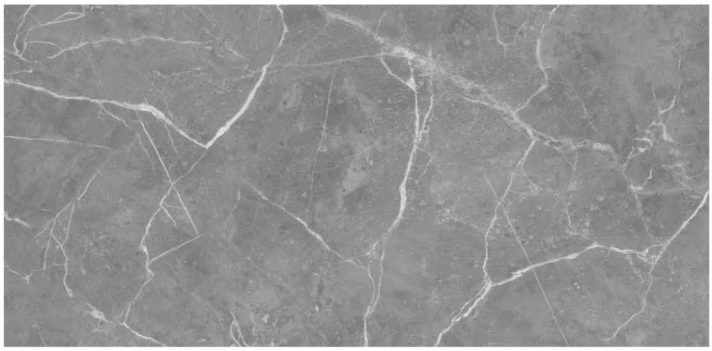


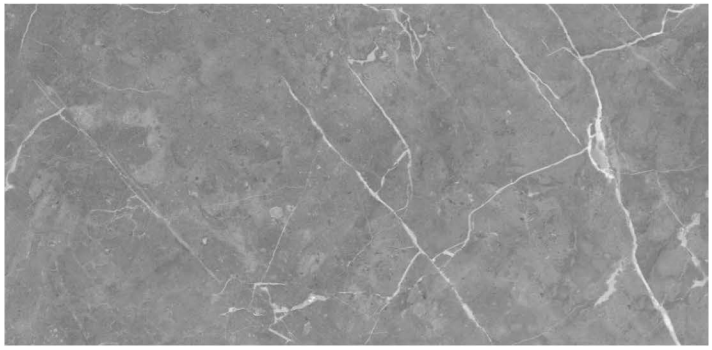

2231

Lwin
TILES



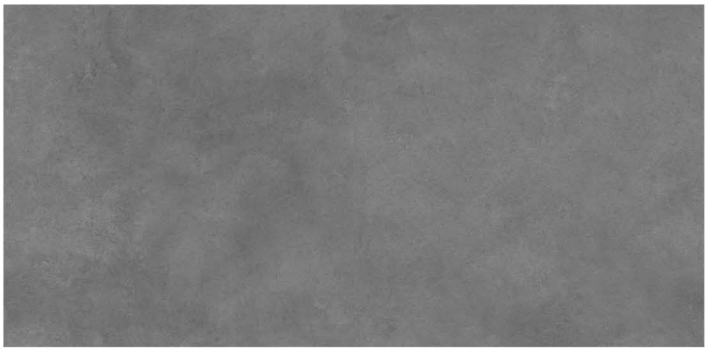








2232

Lwin
TILES



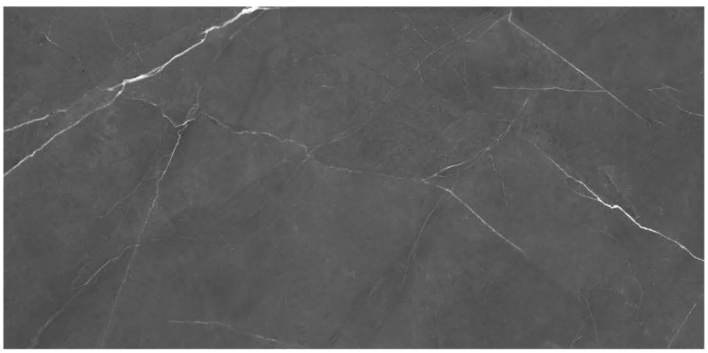

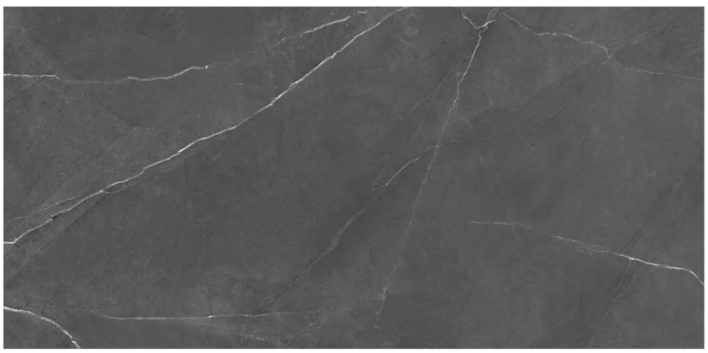

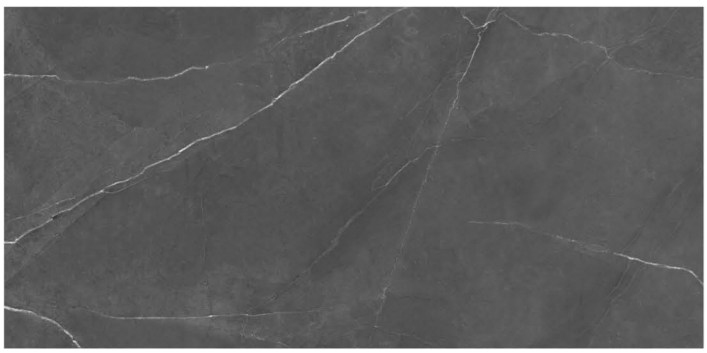

2233

Lwin
TILES









2234

Lwin
TILES










2235

Lwin
TILES

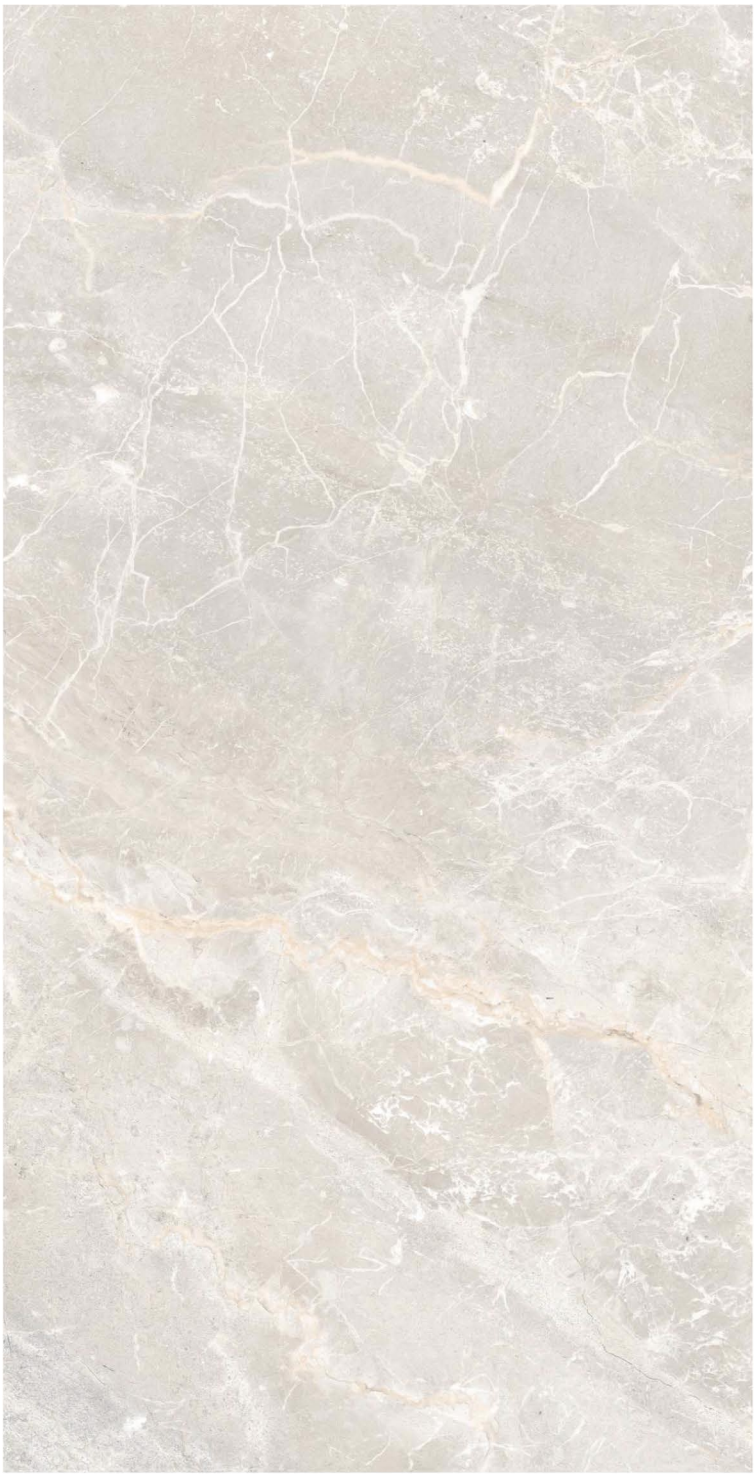







2236

Lwin
TILES




2237

Lwin
TILES





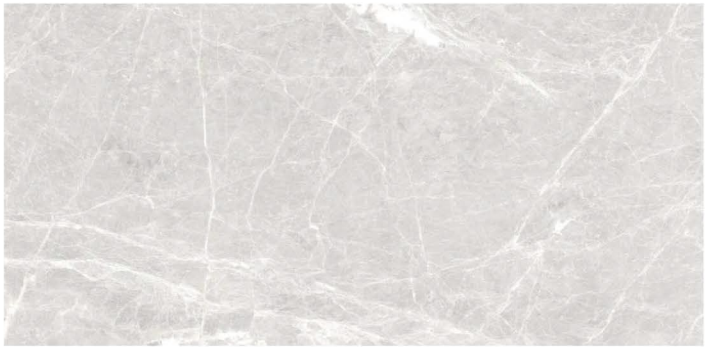



2238

Lwin
TILES



2239

Lwin
TILES









2240

Lwin
TILES









2241

Lwin
TILES









2242

Lwin
TILES









2243

Lwin
TILES









2246

Lwin
TILES









2247

Lwin
TILES









2248

Lwin
TILES









2249

Lwin
TILES



2256


Lwin
TILES

2257

Lwin
TILES






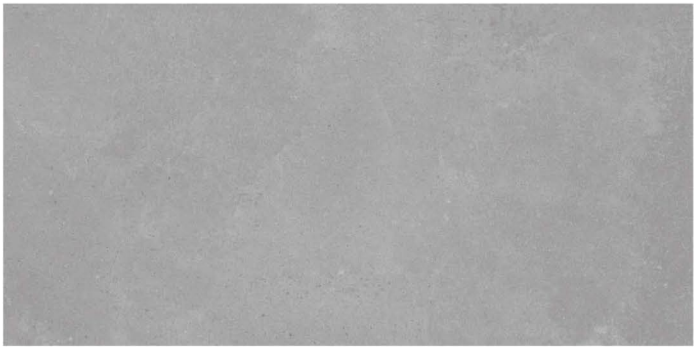



2258

Lwin
TILES

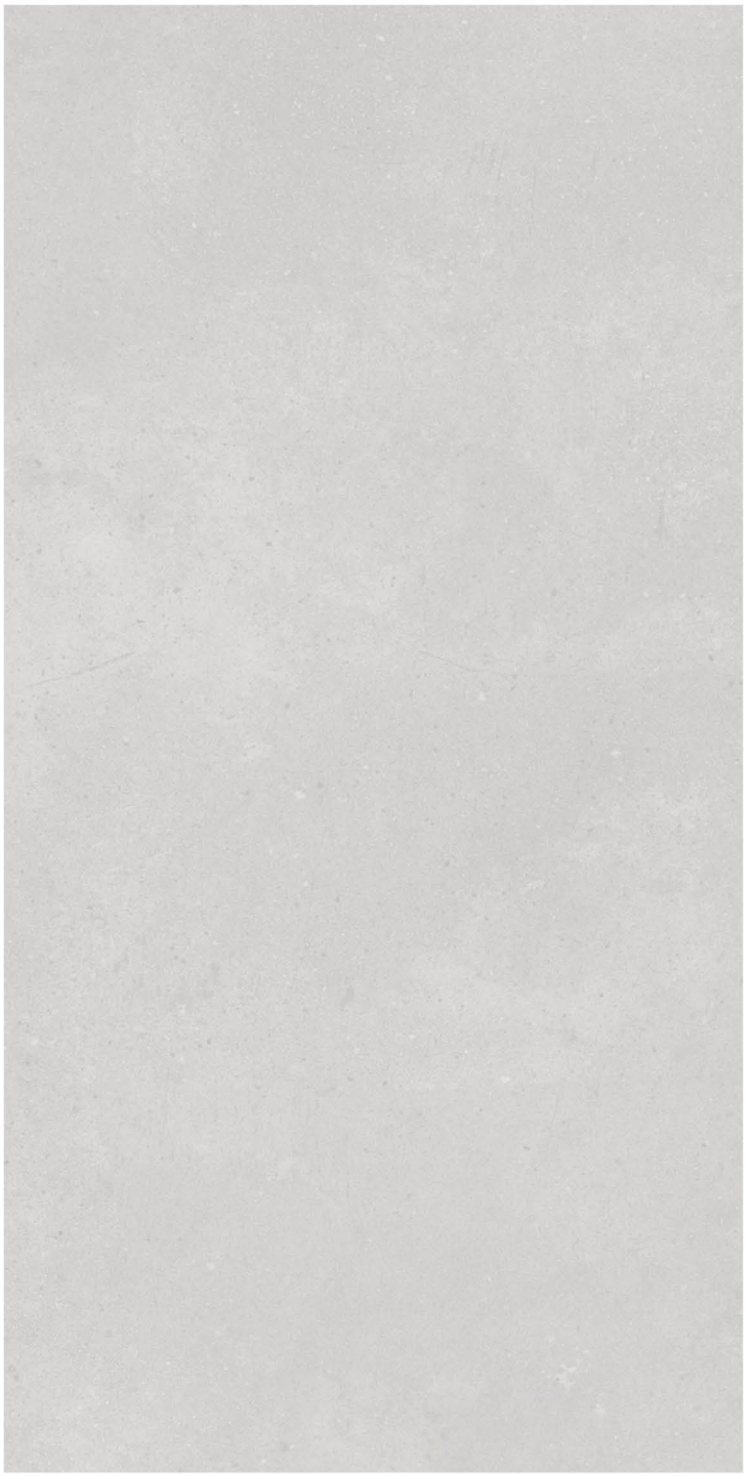











2259

Lwin
TILES

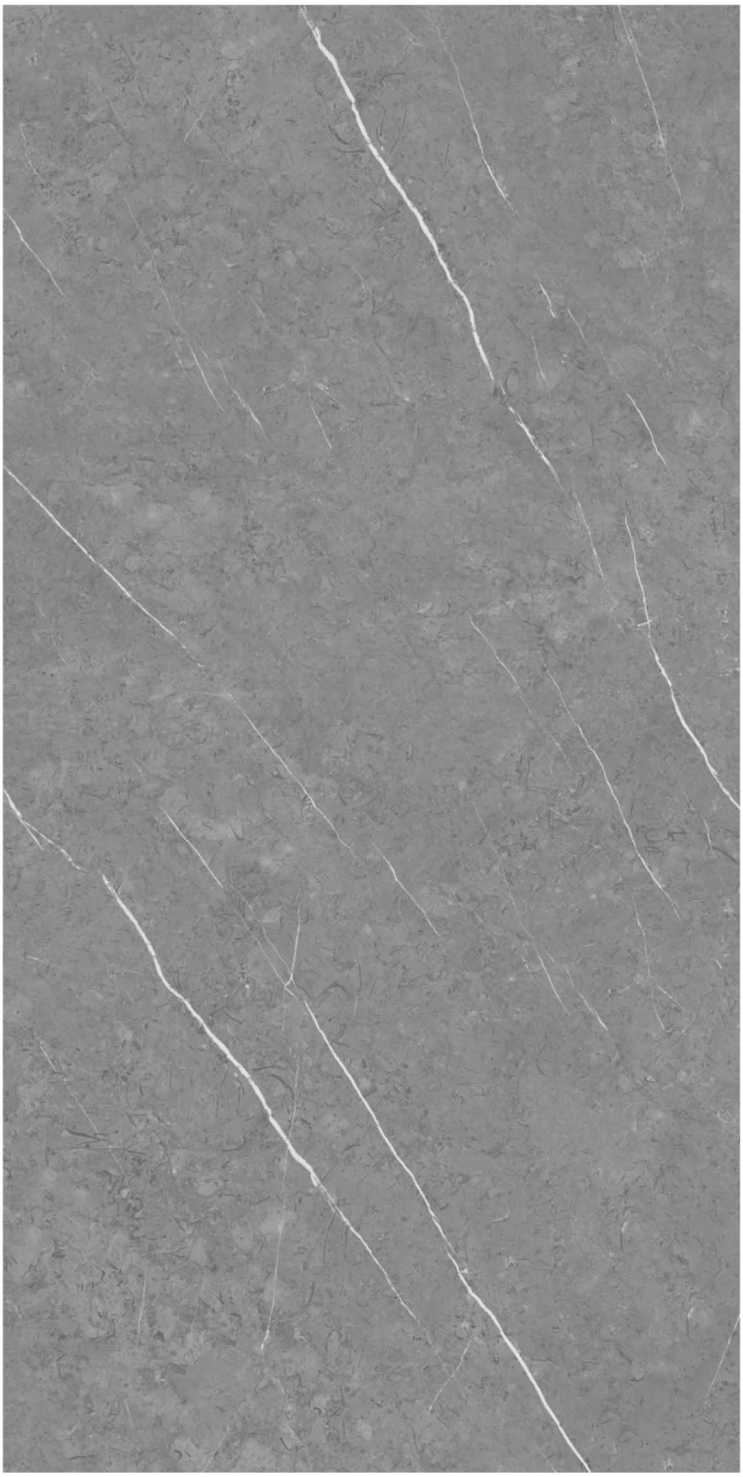

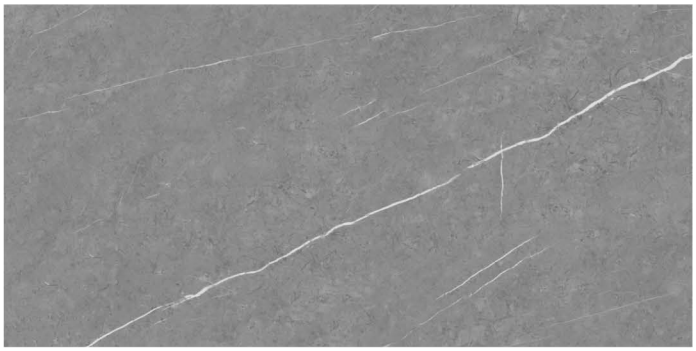


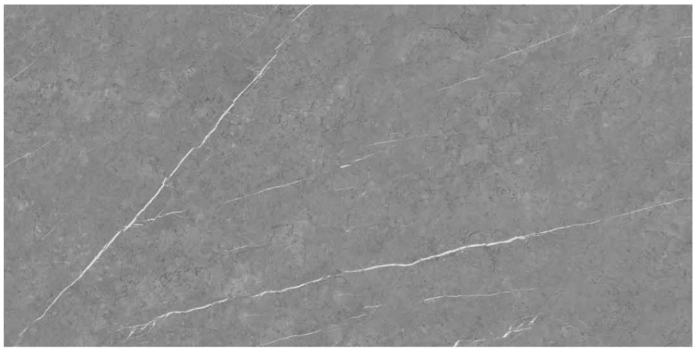


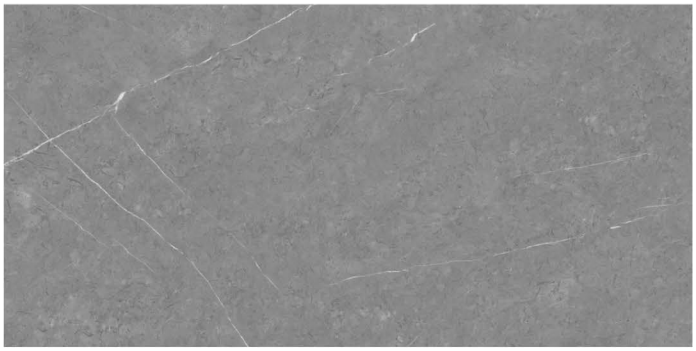



2260

Lwin
TILES

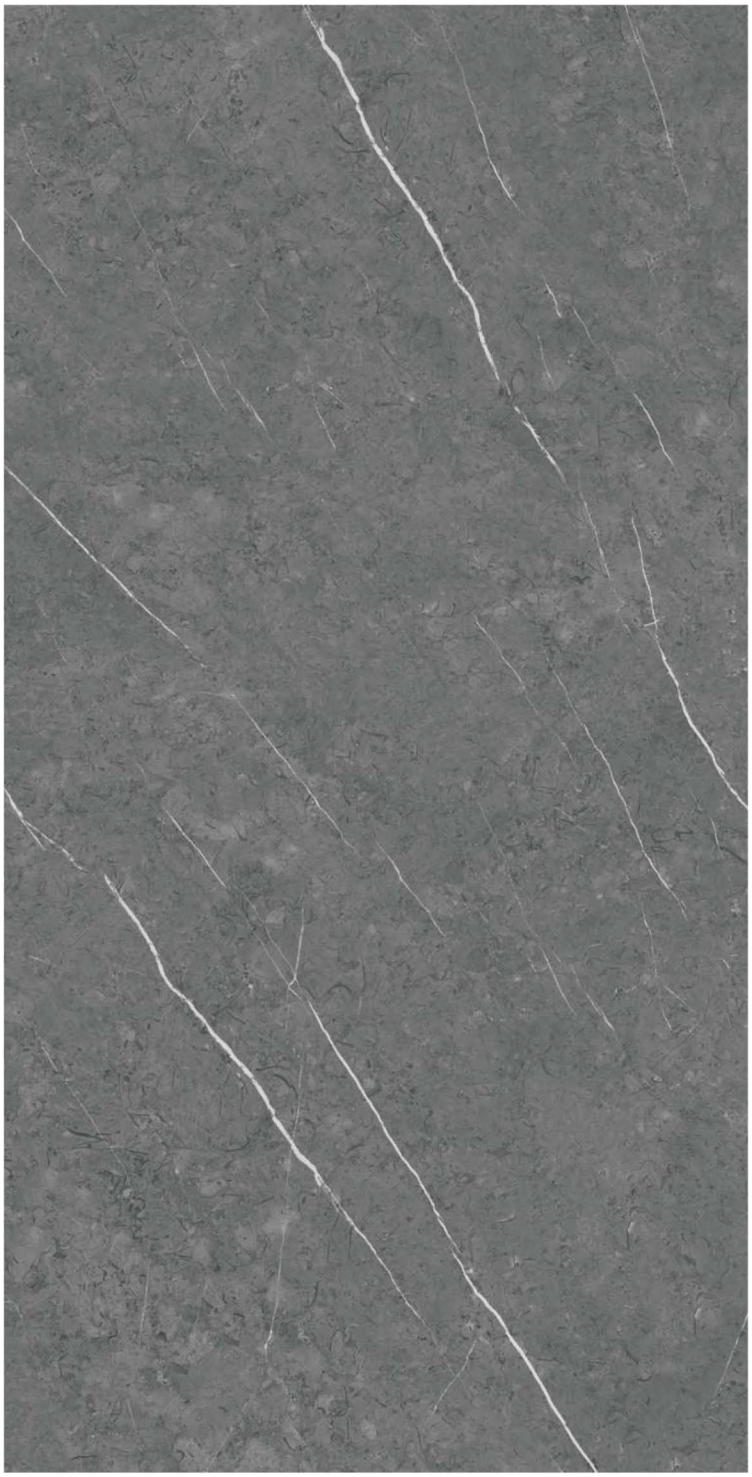

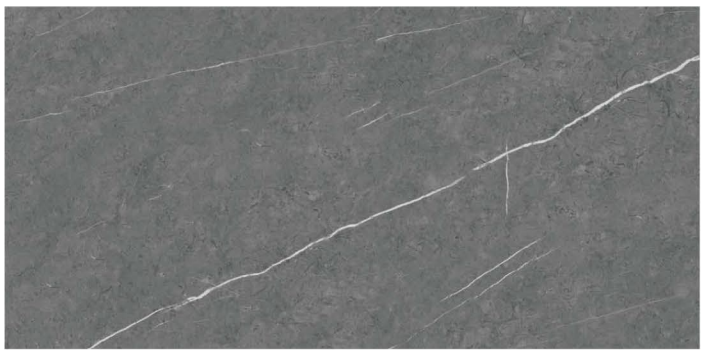


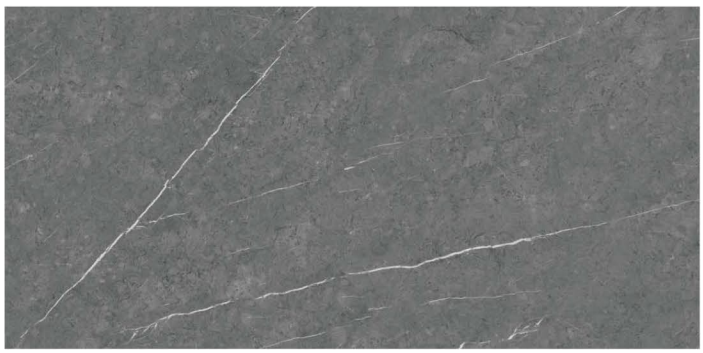

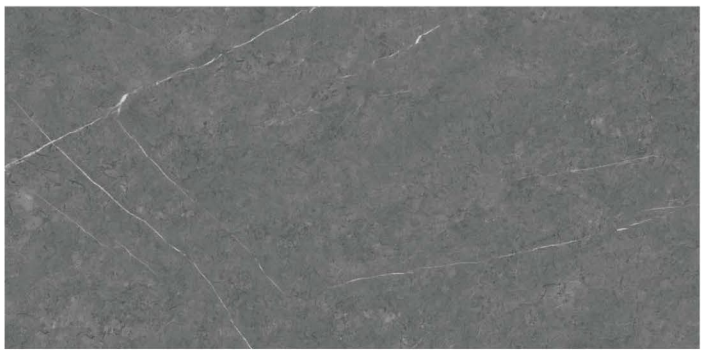

2261

Lwin
TILES

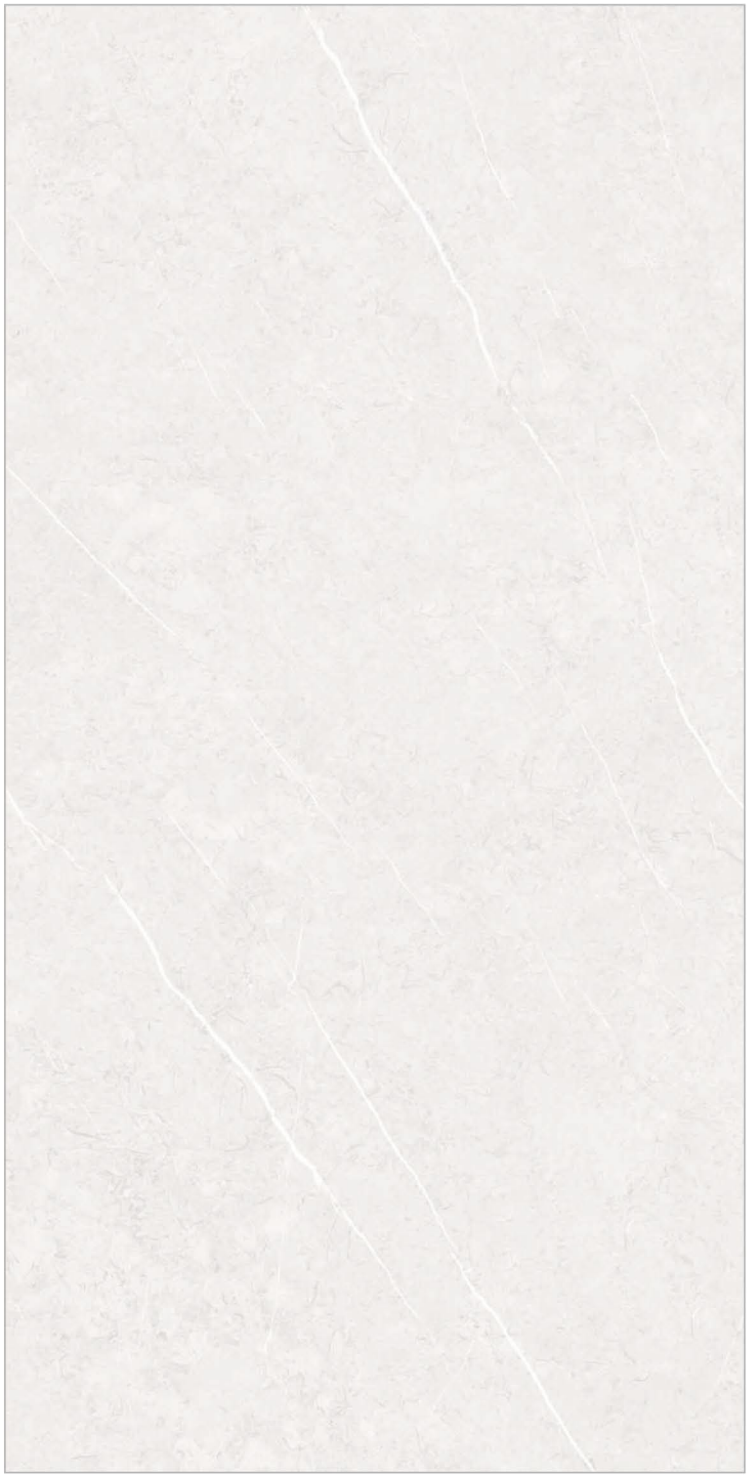







2262

Lwin Tiles Quality Standards

Standards according to **ISO 13006: Annex G - EN 14411: Annex G.** Dry - Pressed Ceramic Tiles. **Group BIa (E_b 0.5%)**

Technical Feature	Test Method	Requirements		Values	
		%	mm	%	mm
A. Dimensions and Surface Quality					
Length and Width	UNI EN ISO 10545-2	± 0.6%	± 2.0	± 0.20%	± 1.0
Thickness		± 5.0%	± 0.5	± 5.00%	± 0.5
Straightness of Sides		± 0.5%	± 1.5	± 0.20%	± 1.0
Rectangularity		± 0.5%	± 2.0	± 0.20%	± 1.2
Surface Flatness					
a) Centre curvature		± 0.5%	± 2.0	± 0.20%	± 1.0
b) Edge curvature		± 0.5%	± 2.0	± 0.20%	± 1.0
c) Warpage		± 0.5%	± 2.0	± 0.20%	± 1.0
Surface Quality		A minimum of 95% of the tiles shall be free from visible defects that would impair the appearance of a major area of tiles.		Compliant	
B. Physical Properties					
Water Absorption	UNI EN ISO 10545-3	$E_b \leq 0.5\%$ Individual maximum : 0.6% (absorbed water mass)		$E_b \leq 0.1\%$ (absorbed water mass)	
Breaking Strength	UNI EN ISO 10545-4	Min. 1300 N		≥ 1700 N	
Modulus of Rupture		Average minimum 35 N/mm² Individual minimum 32 N/mm²		≥ 37 N/mm²	
Frost Resistance	UNI EN ISO 10545-12	Required		Compliant	
Coefficient of Linear Thermal Expansion From Ambient Temperature to 100°c	UNI EN ISO 10545-8	Required		$6 \times 10^{-6}\ K^{-1}$ max	
Scratch Hardness (Mohs scale)	EN 101	Declared by the producer		3 to 6 Depends on Finish & Color	
Crazing Resistance	UNI EN ISO 10545-11	Declared by the producer		4 Cycle Pass	
C. Chemical Properties					
Resistance to Staining	UNI EN ISO 10545-14	Minimum Class 3		5	
Resistance to Household Chemicals and Swimming Pool Salts	UNI EN ISO 10545-13	Minimum GB		GA	
Resistance to Low Concentrations of Acids and Alkalis		To be reported		GLA	
Resistance to High Concentrations of Acids and Alkalis		To be reported		GHA	

Note: Colours shown are as accurate as the limitations of the printing results on paper are possible. Prospective customers are advised to inspect a sample of the tile before placing the order. Every effort has been taken to ensure the accuracy of the information given. However, the company reserves its right to change/alter the specifications without any prior notice. Sometime shade variation or size variation may occur, as this is inherent property of ceramic tile industry. Before fixing the tiles, all are advised to follow the laying instructions printed on the corrugated box of the tile. Company does not take/carry any responsibility of what so ever nature, once tiles are laid.

Lwin
TILES

Office

Om Decora 9 Square,150 Feet Ring Road,
Nana Muva, Rajkot Gujarat 360003 - INDIA

Factory

Jivapar Jetpar Road,
Near Levita Granito LLP Morbi Gujarat 363630 - INDIA
www.L-wintiles.com
Info@L-wintiles.com

Designed By @lshitvastudio